



Intel® Trust Domain Extensions (Intel® TDX) Module Architecture Application Binary Interface (ABI) Reference Specification

DRAFT FOR COMMUNITY REVIEW – WORK IN PROGRESS

348551-008US (draft)

December 2025

Notices and Disclaimers

Intel Corporation (“Intel”) provides these materials as-is, with no express or implied warranties.

All products, dates, and figures specified are preliminary, based on current expectations, and are subject to change without notice. Intel does not guarantee the availability of these interfaces in any future product. Contact your Intel representative to obtain the latest Intel product specifications and roadmaps.

The products described might contain design defects or errors known as errata, which might cause the product to deviate from published specifications. Current, characterized errata are available on request.

Intel technologies might require enabled hardware, software, or service activation. Some results have been estimated or simulated. Your costs and results might vary.

No product or component can be absolutely secure.

You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning Intel products described herein. You agree to grant Intel a non-exclusive, royalty-free license to any patent claim thereafter drafted that includes the subject matter disclosed herein.

No license (express, implied, by estoppel, or otherwise) to any intellectual-property rights is granted by this document.

This document contains information on products, services and/or processes in development. All information provided here is subject to change without notice.

Copies of documents that have an order number and are referenced in this document or other Intel literature may be obtained by calling 1-800-548-4725 or by visiting <http://www.intel.com/design/literature.htm>.

© Intel Corporation. Intel, the Intel logo, and other Intel marks are trademarks of Intel Corporation or its subsidiaries.

Other names and brands might be claimed as the property of others.

Table of Contents

1.	About this Document	17
1.1.	Scope of this Document	17
1.2.	Glossary.....	17
5 1.3.	Notation.....	18
1.4.	References.....	18
2.	CPU Virtualization Tables	19
2.1.	MSR Virtualization	19
2.1.1.	MSR Virtualization Description Files	19
10 2.1.2.	IA32_ARCH_CAPABILITIES (MSR 0x10A)	19
2.1.3.	IA32_MISC_ENABLE (MSR 0x1A0)	20
2.1.4.	IA32_DEBUGCTL (MSR 0x1D9)	20
2.1.5.	IA32_X2APIC_* (MSRs 0x800 – 0x8FF)	20
2.2.	CPUID Virtualization.....	21
15 2.2.1.	CPUID Virtualization Description Files	21
3.	Data Types	24
3.1.	Interface Function Completion Status.....	24
3.1.1.	Function Completion Status Structure.....	24
3.1.2.	Function Completion Status Code Classes (Bits 47:40).....	25
20 3.1.3.	Function Completion Status Codes and Operand IDs	26
3.2.	Basic Crypto Types	27
3.3.	TDX Module Configuration, Enumeration, Initialization and Lifecycle Types.....	27
3.3.1.	CPUID_CONFIG.....	27
3.3.2.	TDX Module Version	28
25 3.3.3.	Global-Scope (TDX Module) Metadata	28
3.3.3.1.	TDX Features Enumeration	28
3.3.3.2.	Global Metadata Fields	32
3.3.4.	Global Metadata Description Files.....	32
3.3.5.	CMR_INFO.....	33
30 3.3.6.	TDSYSINFO_STRUCT.....	33
3.3.7.	TDMR_INFO	36
3.3.8.	FATAL_INFO: TDX Module Fatal Error Logging Format	38
3.3.8.1.	Overview	38
3.3.8.2.	FATAL_INFO Basic Format.....	38
35 3.3.8.3.	FATAL_INFO Format with TD Handle	39
3.3.8.4.	FATAL_INFO Format for Secure EPT Related Failures (with TD Handle).....	39
3.3.8.5.	FATAL_INFO Format for Secure EPT Related Failures (with EPTP)	40
3.3.8.6.	FATAL_INFO Format for HPA Related Failures.....	40
3.3.8.7.	FATAL_INFO Format for PAMT Related Failures.....	40
40 3.3.8.8.	FATAL_INFO Format for Unexpected Exceptions.....	41
3.3.8.9.	FATAL_INFO Format for an Unexpected VM Exit Related Failures	41
3.4.	TD Parameter Types.....	42
3.4.1.	ATTRIBUTES.....	42
3.4.1.1.	Overview	42
45 3.4.1.2.	Notes.....	42
3.4.1.3.	Definition	43
3.4.1.4.	Inter-Dependency of ATTRIBUTES and other TD Configurations	44
3.4.2.	XFAM.....	45
3.4.3.	CONFIG_FLAGS.....	45
50 3.4.4.	CPUID_VALUES.....	47
3.4.5.	TD_PARAMS	47
3.4.6.	EVENT_FILTER and the EVENT_FILTERS Array	50

	3.5.	<i>Physical Memory Management Types</i>	50
	3.5.1.	PAMT Page Type (PT) Values	50
	3.5.2.	Physical Page Size	51
	3.5.3.	HPA_LIST and HPA_LIST_INFO	51
5	3.6.	<i>TD Private Memory Management Data Types: Secure EPT</i>	52
	3.6.1.	Secure EPT Levels	52
	3.6.2.	Secure EPT Entry Information as Returned by TDX Module Functions	52
	3.6.2.1.	Returned L1 Secure EPT Entry Content	53
	3.6.2.2.	Returned L2 Secure EPT Entry Content	53
10	3.6.2.3.	Additional Returned Secure EPT Information	54
	3.6.3.	GPA_ATTR: GPA Attributes	58
	3.6.3.1.	GPA Attributes Rules	59
	3.6.4.	GLA List	59
	3.6.4.1.	GLA_LIST_ENTRY	59
15	3.6.4.2.	GLA_LIST	59
	3.6.4.3.	GLA_LIST_INFO: GLA List GPA and Additional Information	59
	3.7.	<i>TD Entry and Exit Types</i>	60
	3.7.1.	Extended Exit Qualification	60
	3.8.	<i>L2 VM Transition Types</i>	61
20	3.8.1.	L2_ENTER_GUEST_STATE	61
	3.9.	<i>Measurement and Attestation Types</i>	62
	3.9.1.	CPUSVN	62
	3.9.2.	TDREPORT_STRUCT	62
	3.9.3.	TEE_TCB_INFO (Reference)	63
25	3.9.4.	TEE_TCB_SVN (Reference)	64
	3.9.5.	REPORTMACSTRUCT (Reference)	64
	3.9.6.	REPORTTYPE (Reference)	64
	3.9.7.	TDINFO_STRUCT	65
	3.9.7.1.	TDINFO_BASE	66
30	3.9.7.2.	TDINFO_EXTENSION for REPORTTYPE.VERSION 2 or Higher	67
	3.9.8.	TDSIGSTRUCT: TD Signature Structure	67
	3.9.9.	TDKEYREQUEST	68
	3.10.	<i>Metadata Access Types</i>	70
	3.10.1.	MD_FIELD_ID: Metadata Field Identifier / Sequence Header	70
35	3.10.2.	Meaning of Field Codes	71
	3.10.3.	Class Codes	72
	3.10.3.1.	TDX Module Global Scope Field Class Codes	72
	3.10.3.2.	TD-Scope (TDR and TDCS) Field Class Codes	73
	3.10.3.3.	VCPU-Scope (TDVPS) Field Class Codes	74
40	3.10.4.	Order of Field Identifiers	74
	3.10.5.	MD_LIST_HEADER: Metadata List Header	74
	3.11.	<i>Memory Buffer Types</i>	75
	3.11.1.	Private Page List	75
	3.11.2.	HPA_AND_SIZE: HPA and Size of a Buffer	75
45	3.11.3.	HPA_AND_LAST: HPA and Last Byte Index of a Page-Aligned Buffer	75
	3.12.	<i>Service TD Types</i>	76
	3.12.1.	SERVTD_BINDING_TABLE: Service TD Binding Table	76
	3.12.2.	SERVTD_BINDING_STATE: Service TD Binding State	76
	3.12.3.	SERVTD_TYPE: Service TD Binding Type	76
50	3.12.4.	SERVTD_ATTR: Service TD Binding Attributes	77
	3.12.5.	SERVTD_EXT_STRUCT: Extended Service TD Info	78
	3.12.6.	TEE_MODEL_STRUCT	79
	3.12.7.	SERVTD_EXT_HASH	79
	3.13.	<i>Migration Types</i>	79
55	3.13.1.	MBMD: Migration Bundle Metadata	79
	3.13.1.1.	Generic MBMD Structure	79

	3.13.1.2.	TD-Scope Immutable Non-Memory State MBMD Fields	80
	3.13.1.3.	TD-Scope Mutable Non-Memory State MBMD Fields	80
	3.13.1.4.	VCPU-Scope Mutable Non-Memory State MBMD Fields.....	81
	3.13.1.5.	TD Private Memory MBMD Fields.....	81
5	3.13.1.6.	Epoch Token MBMD Fields	81
	3.13.1.7.	Abort Token MBMD Fields	82
	3.13.1.8.	TD Migration Protocol Version Compatibility	82
	3.13.2.	GPA List	82
	3.13.2.1.	Overview	82
10	3.13.2.2.	GPA_LIST_INFO: HPA, First and Last Entries of a GPA List	83
	3.13.2.3.	GPA List Entry.....	83
	3.13.2.4.	GPA List Entry Details.....	84
	3.13.2.5.	TD Migration Protocol Version Compatibility	87
	3.13.3.	Memory Migration Buffers List	87
15	3.13.3.1.	Migration Buffers List Entry	88
	3.13.4.	Page Attributes List	88
	3.13.5.	Memory Migration Page MAC List	88
	3.13.6.	Non-Memory State Migration Buffers List.....	88
	3.13.6.1.	PAGE_LIST_INFO: HPA and Attributes of a Page List	88
20	4.	TD Metadata (Non-Memory State).....	89
	4.1.	TD-Scope Metadata	89
	4.1.1.	TD-Scope Metadata Description Files	89
	4.1.2.	TDR.....	90
	4.1.3.	TDCS	90
25	4.1.3.1.	Overview	90
	4.1.3.2.	TDCS.FEATURE_PARAVIRT_CTRL	91
	4.1.3.3.	TDCS.PID_MODE[4]	94
	4.1.3.4.	TDCS.TD_CTLs	94
	4.1.3.5.	TDCS.VM_CTLs	96
30	4.2.	TDVPS: VCPU-Scope Metadata	97
	4.2.1.	Overview	97
	4.2.2.	TDVPS (excluding TD and L2 VMCSes)	98
	4.2.2.1.	TDVPS Description Files	98
	4.2.2.2.	TDVPS.PIDPT_INDEX[4]	99
35	4.2.2.3.	TDVPS.VCPU_STATE_DETAILS	100
	4.2.3.	TD (L1) VMCS and L2 VMCS	100
	4.2.3.1.	Common to TD and L2 VMCS	100
	4.2.3.2.	TD (L1) VMCS	101
	5.	Interface Functions	103
40	5.1.	How to Read the Interface Function Definitions	103
	5.2.	Reserved Leaf Numbers	103
	5.3.	Common Algorithms Used by Multiple Interface Functions.....	103
	5.3.1.	VCPU Association with an LP	104
	5.4.	Host-Side (SEAMCALL) Interface Functions	104
45	5.4.1.	SEAMCALL Instruction (Common).....	104
	5.4.1.1.	Instruction Description	106
	5.4.1.2.	Completion Status Codes	107
	5.4.2.	TDH.EXPORT.ABORT Leaf.....	108
	5.4.2.1.	Input Operands	108
50	5.4.2.2.	Output Operands	108
	5.4.2.3.	Leaf Function Description	109
	5.4.2.4.	Operands Information	109
	5.4.2.5.	Completion Status Codes	109
	5.4.3.	TDH.EXPORT.BLOCKW Leaf.....	111
55	5.4.3.1.	Input Operands	111

	5.4.3.2.	Output Operands	111
	5.4.3.3.	Leaf Function Description	111
	5.4.3.4.	Operands Information	112
	5.4.3.5.	Completion Status Codes	113
5	5.4.4.	TDH.EXPORT.MEM Leaf	114
	5.4.4.1.	Input Operands	114
	5.4.4.2.	Output Operands	115
	5.4.4.3.	Leaf Function Description	116
	5.4.4.4.	Operands Information	118
10	5.4.4.5.	Completion Status Codes	119
	5.4.5.	TDH.EXPORT.PAUSE Leaf	121
	5.4.5.1.	Input Operands	121
	5.4.5.2.	Output Operands	121
	5.4.5.3.	Leaf Function Description	121
15	5.4.5.4.	Operands Information	122
	5.4.5.5.	Completion Status Codes	122
	5.4.6.	TDH.EXPORT.RESTORE Leaf	123
	5.4.6.1.	Input Operands	123
	5.4.6.2.	Output Operands	123
20	5.4.6.3.	Leaf Function Description	123
	5.4.6.4.	Operands Information	124
	5.4.6.5.	Completion Status Codes	125
	5.4.7.	TDH.EXPORT.STATE.IMMUTABLE Leaf	126
	5.4.7.1.	Input Operands	126
25	5.4.7.2.	Output Operands	127
	5.4.7.3.	Leaf Function Description	127
	5.4.7.4.	Operands Information	128
	5.4.7.5.	Completion Status Codes	128
	5.4.8.	TDH.EXPORT.STATE.TD Leaf	130
30	5.4.8.1.	Input Operands	130
	5.4.8.2.	Output Operands	130
	5.4.8.3.	Leaf Function Description	131
	5.4.8.4.	Operands Information	131
	5.4.8.5.	Completion Status Codes	132
35	5.4.9.	TDH.EXPORT.STATE.VP Leaf	133
	5.4.9.1.	Input Operands	133
	5.4.9.2.	Output Operands	133
	5.4.9.3.	Leaf Function Description	134
	5.4.9.4.	Operands Information	134
40	5.4.9.5.	Completion Status Codes	135
	5.4.10.	TDH.EXPORT.TRACK Leaf	137
	5.4.10.1.	Input Operands	137
	5.4.10.2.	Output Operands	137
	5.4.10.3.	Leaf Function Description	138
45	5.4.10.4.	Operands Information	138
	5.4.10.5.	Completion Status Codes	139
	5.4.11.	TDH.EXPORT.UNBLOCKW Leaf	140
	5.4.11.1.	Input Operands	140
	5.4.11.2.	Output Operands	140
50	5.4.11.3.	Leaf Function Description	140
	5.4.11.4.	Operands Information	141
	5.4.11.5.	Completion Status Codes	141
	5.4.12.	TDH.EXT.INIT Leaf	143
	5.4.12.1.	Input Operands	143
55	5.4.12.2.	Output Operands	143
	5.4.12.3.	Leaf Function Description	143
	5.4.12.4.	Operands Information	143
	5.4.12.5.	Completion Status Codes	144
	5.4.13.	TDH.EXT.MEM.ADD Leaf	145
60	5.4.13.1.	Input Operands	145

	5.4.13.2.	Output Operands	145
	5.4.13.3.	Leaf Function Description	145
	5.4.13.4.	Operands Information	146
	5.4.13.5.	Completion Status Codes	146
5	5.4.14.	TDH.IMPORT.ABORT Leaf	147
	5.4.14.1.	Input Operands	147
	5.4.14.2.	Output Operands	147
	5.4.14.3.	Leaf Function Description	147
	5.4.14.4.	Operands Information	148
10	5.4.14.5.	Completion Status Codes	148
	5.4.15.	TDH.IMPORT.COMMIT Leaf	150
	5.4.15.1.	Input Operands	150
	5.4.15.2.	Output Operands	150
	5.4.15.3.	Leaf Function Description	150
15	5.4.15.4.	Operands Information	150
	5.4.15.5.	Completion Status Codes	151
	5.4.16.	TDH.IMPORT.END Leaf	152
	5.4.16.1.	Input Operands	152
	5.4.16.2.	Output Operands	152
20	5.4.16.3.	Leaf Function Description	152
	5.4.16.4.	Operands Information	152
	5.4.16.5.	Completion Status Codes	153
	5.4.17.	TDH.IMPORT.MEM Leaf	154
	5.4.17.1.	Input Operands	154
25	5.4.17.2.	Output Operands	155
	5.4.17.3.	Leaf Function Description	155
	5.4.17.4.	Operands Information	158
	5.4.17.5.	Completion Status Codes	159
	5.4.18.	TDH.IMPORT.STATE.IMMUTABLE Leaf	161
30	5.4.18.1.	Input Operands	162
	5.4.18.2.	Output Operands	163
	5.4.18.3.	Leaf Function Description	163
	5.4.18.4.	Operands Information	164
	5.4.18.5.	Completion Status Codes	164
35	5.4.19.	TDH.IMPORT.STATE.TD Leaf	166
	5.4.19.1.	Input Operands	166
	5.4.19.2.	Output Operands	166
	5.4.19.3.	Leaf Function Description	167
	5.4.19.4.	Operands Information	168
40	5.4.19.5.	Completion Status Codes	168
	5.4.20.	TDH.IMPORT.STATE.VP Leaf	170
	5.4.20.1.	Input Operands	170
	5.4.20.2.	Output Operands	170
	5.4.20.3.	Leaf Function Description	171
45	5.4.20.4.	Operands Information	172
	5.4.20.5.	Completion Status Codes	172
	5.4.21.	TDH.IMPORT.TRACK Leaf	174
	5.4.21.1.	Input Operands	174
	5.4.21.2.	Output Operands	174
50	5.4.21.3.	Leaf Function Description	174
	5.4.21.4.	Operands Information	175
	5.4.21.5.	Completion Status Codes	175
	5.4.22.	TDH.INTR.CONFIG Leaf	177
	5.4.22.1.	Input Operands	177
55	5.4.22.2.	Output Operands	178
	5.4.22.3.	Leaf Function Description	178
	5.4.22.4.	Operands Information	180
	5.4.22.5.	Completion Status Codes	180
	5.4.23.	TDH.MEM.PAGE.ADD Leaf	182
60	5.4.23.1.	Input Operands	182

	5.4.23.2.	Output Operands	182
	5.4.23.3.	Leaf Function Description	183
	5.4.23.4.	Operands Information	183
	5.4.23.5.	Completion Status Codes	184
5	5.4.24.	TDH.MEM.PAGE.AUG Leaf	185
	5.4.24.1.	Input Operands	185
	5.4.24.2.	Output Operands	185
	5.4.24.3.	Leaf Function Description	186
	5.4.24.4.	Operands Information	186
10	5.4.24.5.	Completion Status Codes	187
	5.4.25.	TDH.MEM.PAGE.DEMOTE Leaf	188
	5.4.25.1.	Input Operands	188
	5.4.25.2.	Output Operands	190
	5.4.25.3.	Leaf Function Description	190
15	5.4.25.4.	Operands Information	192
	5.4.25.5.	Completion Status Codes	193
	5.4.26.	TDH.MEM.PAGE.PROMOTE Leaf.....	194
	5.4.26.1.	Input Operands	194
	5.4.26.2.	Output Operands	195
20	5.4.26.3.	Leaf Function Description	196
	5.4.26.4.	Operands Information	197
	5.4.26.5.	Completion Status Codes	198
	5.4.27.	TDH.MEM.PAGE.RELOCATE Leaf.....	200
	5.4.27.1.	Input Operands	200
25	5.4.27.2.	Output Operands	200
	5.4.27.3.	Leaf Function Description	201
	5.4.27.4.	Operands Information	201
	5.4.27.5.	Completion Status Codes	202
	5.4.28.	TDH.MEM.PAGE.REMOVE Leaf	203
30	5.4.28.1.	Input Operands	203
	5.4.28.2.	Output Operands	203
	5.4.28.3.	Leaf Function Description	204
	5.4.28.4.	Operands Information	204
	5.4.28.5.	Completion Status Codes	205
35	5.4.29.	TDH.MEM.RANGE.BLOCK Leaf	206
	5.4.29.1.	Input Operands	206
	5.4.29.2.	Output Operands	206
	5.4.29.3.	Leaf Function Description	207
	5.4.29.4.	Operands Information	207
40	5.4.29.5.	Completion Status Codes	208
	5.4.30.	TDH.MEM.RANGE.UNBLOCK Leaf.....	209
	5.4.30.1.	Input Operands	209
	5.4.30.2.	Output Operands	209
	5.4.30.3.	Leaf Function Description	210
45	5.4.30.4.	Operands Information	210
	5.4.30.5.	Completion Status Codes	211
	5.4.31.	TDH.MEM.RD Leaf.....	212
	5.4.31.1.	Input Operands	212
	5.4.31.2.	Output Operands	212
50	5.4.31.3.	Leaf Function Description	212
	5.4.31.4.	Operands Information	213
	5.4.31.5.	Completion Status Codes	213
	5.4.32.	TDH.MEM.SCAN.COMP/RANGE – Common	214
	5.4.32.1.	GPA List-of-Lists Processing	214
55	5.4.33.	TDH.MEM.SCAN.COMP Leaf	216
	5.4.33.1.	Input Operands	216
	5.4.33.2.	Output Operands	217
	5.4.33.3.	Leaf Function Description	217
	5.4.33.4.	Operands Information	221
60	5.4.33.5.	Completion Status Codes	221

	5.4.34.	TDH.MEM.SCAN.CONFIG Leaf	223
	5.4.34.1.	Input Operands	223
	5.4.34.2.	Output Operands	224
	5.4.34.3.	Leaf Function Description	225
5	5.4.34.4.	Operands Information	226
	5.4.34.5.	Completion Status Codes	226
	5.4.35.	TDH.MEM.SCAN.RANGE Leaf	228
	5.4.35.1.	Input Operands	228
	5.4.35.2.	Output Operands	229
10	5.4.35.3.	Leaf Function Description	229
	5.4.35.4.	Operands Information	231
	5.4.35.5.	Completion Status Codes	232
	5.4.36.	TDH.MEM.SCAN.RESET Leaf	234
	5.4.36.1.	Input Operands	234
15	5.4.36.2.	Output Operands	234
	5.4.36.3.	Leaf Function Description	234
	5.4.36.4.	Operands Information	234
	5.4.36.5.	Completion Status Codes	235
	5.4.37.	TDH.MEM.SEPT.ADD Leaf	236
20	5.4.37.1.	Input Operands	236
	5.4.37.2.	Output Operands	237
	5.4.37.3.	Leaf Function Description	238
	5.4.37.4.	Operands Information	239
	5.4.37.5.	Completion Status Codes	240
25	5.4.38.	TDH.MEM.SEPT.RD Leaf	241
	5.4.38.1.	Leaf Function Description	242
	5.4.38.2.	Completion Status Codes	243
	5.4.39.	TDH.MEM.SEPT.REMOVE Leaf	244
	5.4.39.1.	Input Operands	244
30	5.4.39.2.	Output Operands	244
	5.4.39.3.	Leaf Function Description	245
	5.4.39.4.	Operands Information	246
	5.4.39.5.	Completion Status Codes	247
	5.4.40.	TDH.MEM.SHARED.SEPT.WR Leaf	248
35	5.4.40.1.	Leaf Function Description	249
	5.4.40.2.	Operands Information	249
	5.4.40.3.	Completion Status Codes	250
	5.4.41.	TDH.MEM.TRACK Leaf	251
	5.4.41.1.	Input Operands	251
40	5.4.41.2.	Output Operands	251
	5.4.41.3.	Leaf Function Description	251
	5.4.41.4.	Operands Information	251
	5.4.41.5.	Completion Status Codes	252
	5.4.42.	TDH.MEM.WR Leaf	253
45	5.4.42.1.	Input Operands	253
	5.4.42.2.	Output Operands	253
	5.4.42.3.	Leaf Function Description	254
	5.4.42.4.	Operands Information	254
	5.4.42.5.	Completion Status Codes	254
50	5.4.43.	TDH.MIG.STREAM.CREATE Leaf	255
	5.4.43.1.	Input Operands	255
	5.4.43.2.	Output Operands	255
	5.4.43.3.	Leaf Function Description	255
	5.4.43.4.	Operands Information	256
55	5.4.43.5.	Completion Status Codes	256
	5.4.44.	TDH.MNG.ADDCX Leaf	257
	5.4.44.1.	Input Operands	257
	5.4.44.2.	Output Operands	257
	5.4.44.3.	Leaf Function Description	257
60	5.4.44.4.	Operands Information	257

	5.4.44.5.	Completion Status Codes	258
	5.4.45.	TDH.MNG.CREATE Leaf	259
	5.4.45.1.	Input Operands	259
	5.4.45.2.	Output Operands	259
5	5.4.45.3.	Leaf Function Description	259
	5.4.45.4.	Operands Information	259
	5.4.45.5.	Completion Status Codes	260
	5.4.46.	TDH.MNG.INIT Leaf	261
	5.4.46.1.	Input Operands	261
10	5.4.46.2.	Output Operands	261
	5.4.46.3.	Leaf Function Latency	262
	5.4.46.4.	Leaf Function Description	262
	5.4.46.5.	Operands Information	262
	5.4.46.6.	Completion Status Codes	263
15	5.4.47.	TDH.MNG.KEY.CONFIG Leaf	264
	5.4.47.1.	Input Operands	264
	5.4.47.2.	Output Operands	264
	5.4.47.3.	Leaf Function Description	264
	5.4.47.4.	Operands Information	264
20	5.4.47.5.	Completion Status Codes	265
	5.4.48.	TDH.MNG.KEY.FREEID Leaf	266
	5.4.48.1.	Input Operands	266
	5.4.48.2.	Output Operands	266
	5.4.48.3.	Leaf Function Description	266
25	5.4.48.4.	Operands Information	266
	5.4.48.5.	Completion Status Codes	267
	5.4.49.	TDH.MNG.KEY.RECLAIMID Leaf (Deprecated)	268
	5.4.49.1.	Input Operands	268
	5.4.49.2.	Output Operands	268
30	5.4.49.3.	Leaf Function Description	268
	5.4.49.4.	Completion Status Codes	268
	5.4.50.	TDH.MNG.RD Leaf	269
	5.4.50.1.	Input Operands	269
	5.4.50.2.	Output Operands	269
35	5.4.50.3.	Leaf Function Description	269
	5.4.50.4.	Operands Information	270
	5.4.50.5.	Completion Status Codes	270
	5.4.51.	TDH.MNG.VPFLUSHDONE Leaf	272
	5.4.51.1.	Input Operands	272
40	5.4.51.2.	Output Operands	272
	5.4.51.3.	Leaf Function Description	272
	5.4.51.4.	Operands Information	272
	5.4.51.5.	Completion Status Codes	273
	5.4.52.	TDH.MNG.WR Leaf	274
45	5.4.52.1.	Input Operands	274
	5.4.52.2.	Output Operands	274
	5.4.52.3.	Leaf Function Description	274
	5.4.52.4.	Operands Information	275
	5.4.52.5.	Completion Status Codes	275
50	5.4.53.	TDH.MR.EXTEND Leaf	277
	5.4.53.1.	Input Operands	277
	5.4.53.2.	Output Operands	277
	5.4.53.3.	Leaf Function Description	277
	5.4.53.4.	Operands Information	278
55	5.4.53.5.	Completion Status Codes	278
	5.4.54.	TDH.MR.FINALIZE Leaf	280
	5.4.54.1.	Input Operands	280
	5.4.54.2.	Output Operands	280
	5.4.54.3.	Leaf Function Description	280
60	5.4.54.4.	Operands Information	281

	5.4.54.5.	Completion Status Codes	281
	5.4.55.	TDH.PHYMEM.CACHE.WB Leaf	282
	5.4.55.1.	Input Operands	282
	5.4.55.2.	Output Operands	282
5	5.4.55.3.	Leaf Function Description	282
	5.4.55.4.	Operands Information	283
	5.4.55.5.	Completion Status Codes	283
	5.4.56.	TDH.PHYMEM.PAGE.RDMD Leaf	285
	5.4.56.1.	Input Operands	285
10	5.4.56.2.	Output Operands	285
	5.4.56.3.	Leaf Function Description	287
	5.4.56.4.	Operands Information	287
	5.4.56.5.	Completion Status Codes	287
	5.4.57.	TDH.PHYMEM.PAGE.RECLAIM Leaf	288
15	5.4.57.1.	Input Operands	288
	5.4.57.2.	Output Operands	288
	5.4.57.3.	Leaf Function Description	289
	5.4.57.4.	Operands Information	289
	5.4.57.5.	Completion Status Codes	290
20	5.4.58.	TDH.PHYMEM.PAGE.WBINVD Leaf	292
	5.4.58.1.	Input Operands	292
	5.4.58.2.	Output Operands	292
	5.4.58.3.	Leaf Function Description	292
25	5.4.58.4.	Operands Information	292
	5.4.58.5.	Completion Status Codes	293
	5.4.59.	TDH.PHYMEM.PAMT.ADD Leaf	294
	5.4.59.1.	Input Operands	294
	5.4.59.2.	Output Operands	294
	5.4.59.3.	Leaf Function Description	294
30	5.4.59.4.	Operands Information	295
	5.4.59.5.	Completion Status Codes	295
	5.4.60.	TDH.PHYMEM.PAMT.REMOVE Leaf	296
	5.4.60.1.	Input Operands	296
	5.4.60.2.	Output Operands	296
35	5.4.60.3.	Leaf Function Description	296
	5.4.60.4.	Operands Information	297
	5.4.60.5.	Completion Status Codes	297
	5.4.61.	TDH.SERVTD.BIND Leaf	298
40	5.4.61.1.	Input Operands	298
	5.4.61.2.	Output Operands	298
	5.4.61.3.	Leaf Function Description	299
	5.4.61.4.	Operands Information	299
	5.4.61.5.	Completion Status Codes	299
	5.4.62.	TDH.SERVTD.REBIND Leaf	301
45	5.4.62.1.	Input Operands	301
	5.4.62.2.	Output Operands	301
	5.4.62.3.	Leaf Function Description	302
	5.4.62.4.	Operands Information	302
	5.4.62.5.	Completion Status Codes	302
50	5.4.63.	TDH.SERVTD.PREBIND Leaf	304
	5.4.63.1.	Input Operands	304
	5.4.63.2.	Output Operands	304
	5.4.63.3.	Leaf Function Description	304
	5.4.63.4.	Operands Information	304
55	5.4.63.5.	Completion Status Codes	305
	5.4.64.	TDH.SYS.CONFIG Leaf	306
	5.4.64.1.	Input Operands	306
	5.4.64.2.	Output Operands	307
	5.4.64.3.	Leaf Function Description	307
60	5.4.64.4.	Operands Information	308

	5.4.64.5.	Completion Status Codes	308
	5.4.65.	TDH.SYS.DISABLE Leaf	310
	5.4.65.1.	Input Operands	310
	5.4.65.2.	Output Operands	310
5	5.4.65.3.	Leaf Function Description	310
	5.4.65.4.	Operands Information	311
	5.4.65.5.	Completion Status Codes	311
	5.4.66.	TDH.SYS.INFO Leaf	312
	5.4.66.1.	Input Operands	312
10	5.4.66.2.	Output Operands	312
	5.4.66.3.	Leaf Function Description	312
	5.4.66.4.	Operands Information	312
	5.4.66.5.	Completion Status Codes	313
	5.4.67.	TDH.SYS.INIT Leaf	314
15	5.4.67.1.	Input Operands	314
	5.4.67.2.	Output Operands	315
	5.4.67.3.	Leaf Function Description	316
	5.4.67.4.	Operands Information	316
	5.4.67.5.	Completion Status Codes	316
20	5.4.68.	TDH.SYS.KEY.CONFIG Leaf	318
	5.4.68.1.	Input Operands	318
	5.4.68.2.	Output Operands	318
	5.4.68.3.	Leaf Function Description	318
	5.4.68.4.	Operands Information	318
25	5.4.68.5.	Completion Status Codes	319
	5.4.69.	TDH.SYS.LP.INIT Leaf	320
	5.4.69.1.	Input Operands	320
	5.4.69.2.	Output Operands	320
	5.4.69.3.	Leaf Function Description	321
30	5.4.69.4.	Operands Information	321
	5.4.69.5.	Completion Status Codes	321
	5.4.70.	TDH.SYS.LP.SHUTDOWN Leaf (Deprecated)	323
	5.4.70.1.	Input Operands	323
	5.4.70.2.	Output Operands	323
35	5.4.70.3.	Leaf Function Description	323
	5.4.70.4.	Completion Status Codes	323
	5.4.71.	TDH.SYS.RD Leaf	324
	5.4.71.1.	Input Operands	324
	5.4.71.2.	Output Operands	324
40	5.4.71.3.	Leaf Function Description	324
	5.4.71.4.	Operands Information	325
	5.4.71.5.	Completion Status Codes	325
	5.4.72.	TDH.SYS.RDALL Leaf	326
	5.4.72.1.	Input Operands	326
45	5.4.72.2.	Output Operands	326
	5.4.72.3.	Leaf Function Description	326
	5.4.72.4.	Operands Information	327
	5.4.72.5.	Completion Status Codes	327
	5.4.73.	TDH.SYS.S4_END Leaf	328
50	5.4.73.1.	Input Operands	328
	5.4.73.2.	Output Operands	328
	5.4.73.3.	Leaf Function Description	328
	5.4.73.4.	Operands Information	328
	5.4.73.5.	Completion Status Codes	329
55	5.4.74.	TDH.SYS.SHUTDOWN Leaf	330
	5.4.74.1.	Input Operands	330
	5.4.74.2.	Output Operands	330
	5.4.74.3.	Leaf Function Description	330
	5.4.74.4.	Operands Information	331
60	5.4.74.5.	Completion Status Codes	331

	5.4.75.	TDH.SYS.TDMR.INIT Leaf	333
	5.4.75.1.	Input Operands	333
	5.4.75.2.	Output Operands	333
	5.4.75.3.	Leaf Function Description	333
5	5.4.75.4.	Operands Information	333
	5.4.75.5.	Completion Status Codes	334
	5.4.76.	TDH.SYS.UPDATE Leaf	335
	5.4.76.1.	Input Operands	335
	5.4.76.2.	Output Operands	336
10	5.4.76.3.	Leaf Function Description	336
	5.4.76.4.	Operands Information	337
	5.4.76.5.	Completion Status Codes	337
	5.4.77.	TDH.VP.ADDCX Leaf	337
	5.4.77.1.	Input Operands	338
15	5.4.77.2.	Output Operands	338
	5.4.77.3.	Leaf Function Description	338
	5.4.77.4.	Operands Information	338
	5.4.77.5.	Completion Status Codes	339
	5.4.78.	TDH.VP.CREATE Leaf	340
20	5.4.78.1.	Input Operands	340
	5.4.78.2.	Output Operands	340
	5.4.78.3.	Leaf Function Description	340
	5.4.78.4.	Operands Information	340
	5.4.78.5.	Completion Status Codes	341
25	5.4.79.	TDH.VP.ENTER Leaf	342
	5.4.79.1.	Input Operands	342
	5.4.79.2.	Output Operands	344
	5.4.79.3.	Leaf Function Description	350
	5.4.79.4.	Operands Information	352
30	5.4.79.5.	Completion Status Codes	352
	5.4.80.	TDH.VP.FLUSH Leaf	354
	5.4.80.1.	Input Operands	354
	5.4.80.2.	Output Operands	354
	5.4.80.3.	Leaf Function Description	354
35	5.4.80.4.	Operands Information	354
	5.4.80.5.	Completion Status Codes	355
	5.4.81.	TDH.VP.INIT Leaf	356
	5.4.81.1.	Input Operands	356
	5.4.81.2.	Output Operands	356
40	5.4.81.3.	Leaf Function Description	356
	5.4.81.4.	Operands Information	357
	5.4.81.5.	Completion Status Codes	357
	5.4.82.	TDH.VP.RD Leaf	359
	5.4.82.1.	Input Operands	359
45	5.4.82.2.	Output Operands	359
	5.4.82.3.	Leaf Function Description	359
	5.4.82.4.	Operands Information	360
	5.4.82.5.	Completion Status Codes	360
	5.4.83.	TDH.VP.WR Leaf	362
50	5.4.83.1.	Input Operands	362
	5.4.83.2.	Output Operands	362
	5.4.83.3.	Leaf Function Description	362
	5.4.83.4.	Operands Information	363
	5.4.83.5.	Completion Status Codes	363
55	5.5.	<i>Guest-Side (TDCALL) Interface Functions</i>	<i>365</i>
	5.5.1.	TDCALL Instruction (Common)	365
	5.5.1.1.	Input Operands	365
	5.5.1.2.	Output Operands	365
	5.5.1.3.	Instruction Description	365

	5.5.1.4.	TDCALL Leaf Numbers	366
	5.5.1.5.	Completion Status Codes	366
	5.5.2.	TDG.INTR.POST	367
5	5.5.2.1.	Input Operands	367
	5.5.2.2.	Output Operands	367
	5.5.2.3.	Leaf Function Description	367
	5.5.2.4.	Operands Information	368
	5.5.2.5.	Completion Status Codes	368
	5.5.3.	TDG.MEM.PAGE.ACCEPT Leaf	369
10	5.5.3.1.	Input Operands	369
	5.5.3.2.	Output Operands	369
	5.5.3.3.	Leaf Function Description	369
	5.5.3.4.	Operands Information	370
	5.5.3.5.	Completion Status Codes	370
15	5.5.4.	TDG.MEM.PAGE.ATTR.RD Leaf	372
	5.5.4.1.	Input Operands	372
	5.5.4.2.	Output Operands	372
	5.5.4.3.	Leaf Function Description	373
	5.5.4.4.	Operands Information	373
20	5.5.4.5.	Completion Status Codes	374
	5.5.5.	TDG.MEM.PAGE.ATTR.WR Leaf	375
	5.5.5.1.	Input Operands	375
	5.5.5.2.	Output Operands	376
	5.5.5.3.	Leaf Function Description	377
25	5.5.5.4.	Operands Information	378
	5.5.5.5.	Completion Status Codes	378
	5.5.6.	TDG.MEM.PAGE.RELEASE Leaf	379
	5.5.6.1.	Input Operands	379
	5.5.6.2.	Output Operands	379
30	5.5.6.3.	Leaf Function Description	380
	5.5.6.4.	Operands Information	381
	5.5.6.5.	Completion Status Codes	381
	5.5.7.	TDG.MR.ASSIGNSVNS	383
	5.5.7.1.	Input Operands	383
35	5.5.7.2.	Output Operands	383
	5.5.7.3.	Leaf Function Description	383
	5.5.7.4.	Operands Information	384
	5.5.7.5.	Completion Status Codes	384
	5.5.8.	TDG.MR.KEY.GET	385
40	5.5.8.1.	Input Operands	385
	5.5.8.2.	Output Operands	385
	5.5.8.3.	Leaf Function Description	385
	5.5.8.4.	Operands Information	386
	5.5.8.5.	Completion Status Codes	386
45	5.5.9.	TDG.MR.REPORT Leaf	387
	5.5.9.1.	Input Operands	387
	5.5.9.2.	Output Operands	387
	5.5.9.3.	Leaf Function Description	388
	5.5.9.4.	Operands Information	388
50	5.5.9.5.	Completion Status Codes	389
	5.5.10.	TDG.MR.RTMR.EXTEND Leaf	390
	5.5.10.1.	Input Operands	390
	5.5.10.2.	Output Operands	390
	5.5.10.3.	Leaf Function Description	390
55	5.5.10.4.	Operands Information	390
	5.5.10.5.	Completion Status Codes	391
	5.5.11.	TDG.MR.VERIFYREPORT	392
	5.5.11.1.	Input Operands	392
	5.5.11.2.	Output Operands	392
60	5.5.11.3.	Leaf Function Description	392

	5.5.11.4.	Operands Information	392
	5.5.11.5.	Completion Status Codes	393
	5.5.12.	TDG.SERVTD.RD Leaf	394
5	5.5.12.1.	Input Operands	394
	5.5.12.2.	Output Operands	394
	5.5.12.3.	Leaf Function Description	395
	5.5.12.4.	Operands Information	395
	5.5.12.5.	Completion Status Codes	396
	5.5.13.	TDG.SERVTD.REBIND.APPROVE	398
10	5.5.13.1.	Input Operands	398
	5.5.13.2.	Output Operands	398
	5.5.13.3.	Leaf Function Description	398
	5.5.13.4.	Operands Information	399
	5.5.13.5.	Completion Status Codes	400
15	5.5.14.	TDG.SERVTD.WR Leaf	402
	5.5.14.1.	Input Operands	402
	5.5.14.2.	Output Operands	402
	5.5.14.3.	Leaf Function Description	403
	5.5.14.4.	Operands Information	403
20	5.5.14.5.	Completion Status Codes	404
	5.5.15.	TDG.SYS.RD Leaf	406
	5.5.15.1.	Input Operands	406
	5.5.15.2.	Output Operand	406
	5.5.15.3.	Leaf Function Description	406
25	5.5.15.4.	Operands Information	407
	5.5.15.5.	Completion Status Codes	407
	5.5.16.	TDG.SYS.RDALL Leaf	408
	5.5.16.1.	Input Operands	408
	5.5.16.2.	Output Operands	408
30	5.5.16.3.	Leaf Function Description	408
	5.5.16.4.	Operands Information	409
	5.5.16.5.	Completion Status Codes	409
	5.5.17.	TDG.VM.RD Leaf	410
	5.5.17.1.	Input Operands	410
35	5.5.17.2.	Output Operands	410
	5.5.17.3.	Leaf Function Description	410
	5.5.17.4.	Operands Information	411
	5.5.17.5.	Completion Status Codes	411
	5.5.18.	TDG.VM.WR Leaf	412
40	5.5.18.1.	Input Operands	412
	5.5.18.2.	Output Operands	412
	5.5.18.3.	Leaf Function Description	412
	5.5.18.4.	Operands Information	413
	5.5.18.5.	Completion Status Codes	413
45	5.5.19.	TDG.VP.CPUIDVE.SET Leaf	414
	5.5.19.1.	Input Operands	414
	5.5.19.2.	Output Operands	414
	5.5.19.3.	Leaf Function Description	414
	5.5.19.4.	Operands Information	414
50	5.5.19.5.	Completion Status Codes	415
	5.5.20.	TDG.VP.ENTER Leaf	416
	5.5.20.1.	Input Operands	416
	5.5.20.2.	Output Operands	417
	5.5.20.3.	Leaf Function Description	419
55	5.5.20.4.	Operands Information	420
	5.5.20.5.	Completion Status Codes	421
	5.5.21.	TDG.VP.INFO Leaf	422
	5.5.21.1.	Input Operands	422
	5.5.21.2.	Output Operands	422
60	5.5.21.3.	Leaf Function Description	423

	5.5.21.4.	Operands Information	423
	5.5.21.5.	Completion Status Codes	423
	5.5.22.	TDG.VP.INVEPT Leaf	424
5	5.5.22.1.	Input Operands	424
	5.5.22.2.	Output Operands	424
	5.5.22.3.	Leaf Function Description	424
	5.5.22.4.	Operands Information	425
	5.5.22.5.	Completion Status Codes	425
10	5.5.23.	TDG.VP.INVGLA Leaf	426
	5.5.23.1.	Input Operands	426
	5.5.23.2.	Output Operands	426
	5.5.23.3.	Leaf Function Description	427
	5.5.23.4.	Operands Information	427
	5.5.23.5.	Completion Status Codes	427
15	5.5.24.	TDG.VP.RD Leaf	429
	5.5.24.1.	Input Operands	429
	5.5.24.2.	Output Operands	429
	5.5.24.3.	Leaf Function Description	429
20	5.5.24.4.	Operands Information	430
	5.5.24.5.	Completion Status Codes	430
	5.5.25.	TDG.VP.VEINFO.GET Leaf	431
	5.5.25.1.	Input Operands	431
	5.5.25.2.	Output Operands	431
25	5.5.25.3.	Leaf Function Description	432
	5.5.25.4.	Operands Information	433
	5.5.25.5.	Completion Status Codes	433
	5.5.26.	TDG.VP.VMCALL Leaf	434
	5.5.26.1.	Input Operands	434
30	5.5.26.2.	Output Operands	435
	5.5.26.3.	Leaf Function Description	435
	5.5.26.4.	Operands Information	435
	5.5.26.5.	Completion Status Codes	436
	5.5.27.	TDG.VP.WR Leaf	437
35	5.5.27.1.	Input Operands	437
	5.5.27.2.	Output Operands	437
	5.5.27.3.	Leaf Function Description	437
	5.5.27.4.	Operands Information	438
	5.5.27.5.	Completion Status Codes	438

1. About this Document

1.1. Scope of this Document

This document describes the Application Binary Interface (ABI) of the Intel® Trust Domain Extensions (Intel® TDX) module, implemented using the Intel TDX Instruction Set Architecture (ISA) extensions, for confidential execution of Trust Domains in an untrusted hosted cloud environment.

This document is part of the **TDX Module Architecture Specification Set**, which includes the following documents:

Table 1.1: TDX Module Architecture Specification Set

Document Name	Reference	Description
TDX Module Base Architecture Specification	[TDX Module Base Spec]	Base TDX Module architecture overview and specification, covering key management, TD lifecycle management, memory management, virtualization, measurement and attestation, service TDs, debug aspects etc.
TDX Module TD Migration Architecture Specification	[TD Migration Spec]	Architecture overview and specification for TD migration
TDX Module TD Partitioning Architecture Specification	[TD Partitioning Spec]	Architecture overview and specification for TD Partitioning
TDX Module Interrupt Virtualization Architecture Specification	[Interrupt Virtualization Spec]	Architecture overview and specification for interrupt virtualization
TDX Module TDX Connect Specification	[TDX Connect Spec]	Architecture overview and specification for TDX Connect
TDX Module ABI Reference Specification	[TDX Module ABI Spec]	Detailed TDX Module Application Binary Interface (ABI) reference specification, covering the entire TDX Module architecture
TDX Module TDX Connect ABI Reference Specification	[TDX Connect ABI Spec]	Detailed TDX Module Application Binary Interface (ABI) reference specification, covering the TDX connect architecture
TDX Module ABI Reference Tables	[TDX Module ABI Tables]	A set of files detailing TDX Module Application Binary Interface (ABI)
TDX Module ABI Incompatibilities	[TDX Module ABI Incompatibilities]	Description of the incompatibilities between TDX 1.0 and TDX 1.4/1.5 that may impact the host VMM and/or guest TDs

This document is a work in progress and is subject to change based on customer feedback and internal analysis. This document does not imply any product commitment from Intel to anything in terms of features and/or behaviors.

Note: The contents of this document are accurate to the best of Intel's knowledge as of the date of publication, though Intel does not represent that such information will remain as described indefinitely in light of future research and design implementations. Intel does not commit to updating this document in real time when such changes occur.

1.2. Glossary

See the [TDX Module Base Spec].

1.3. *Notation*

See the [TDX Module Base Spec].

1.4. *References*

See the [TDX Module Base Spec].

2. CPU Virtualization Tables

2.1. MSR Virtualization

2.1.1. MSR Virtualization Description Files

Most of the MSR virtualization information is provided in separate files:

- **msr_virtualization.pdf** provides a human-readable MSR virtualization table.
- **msr_virtualization.csv** provides the same table in a Comma-Separated Values (CSV) format. This file can be imported, if required, to tools such as MS Excel for further processing.

The tables below describe the information provided by those files. Additional information about specific MSRs is provided in the following sections.

In addition to the above files, **msr_virtualization.json**, a JSON format file with the same information is provided.

Table 2.1: MSR Virtualization Table Description

Column	Description
First (H)	Index of the first MSR in the range
Last (H)	Index of the last MSR in the range
Size (H)	Number of MSRs in the range
MSR Architectural Name	MSR name
On RDMSR	MSR virtualization on read; see the table below
On WRMSR	MSR virtualization on write; see the table below

Table 2.2: On RDMSR / On WRMSR Column Details

MSR Virtualization	Description
Native	Direct read or write from/to CPU
#GP(0)	Inject a #GP(0) exception
#VE	For L1: Inject a #VE(NON_CONFIG_PARAVIRT) exception For L2: L2->L1
Inject_GP(condition)	If the condition is true, the TDX Module injects a #GP(0). Else, the TDX Module reads from CPU or writes to the CPU: <pre> if (condition) #GP(0) else Native </pre>
Inject_GP_or_VE(condition)	If the condition is true, the TDX Module injects a #GP(0). Else, the TDX Module injects a #VE or does an L2->L1 exit as described above: <pre> if (condition) #GP(0) else if L1, #VE(CONFIG_PARAVIRT) if L2, L2->L1 exit </pre>

2.1.2. IA32_ARCH_CAPABILITIES (MSR 0x10A)

The virtualization of IA32_ARCH_CAPABILITIES (MSR 0x10A) is described in the [Base Spec] section “Checking and Virtualization of CPU Side Channel Protection Mechanisms Enumeration”.

2.1.3. IA32_MISC_ENABLE (MSR 0x1A0)

The virtualization of IA32_MISC_ENABLE (MSR 0x1A0) depends on TDCS.TD_CTL.S.REDUCE_VE, as set by the guest TD. Support of this bit is enumerated by TDX_FEATURES0.VE_REDUCTION (bit 30).

If TDCS.TD_CTL.S.REDUCE_VE is 0 or is not supported, then RDMSR(IA32_MISC_ENABLE) returns the MSR's native value, except that if the TD's ATTRIBUTES.PERFMON is 0, then bit 7 (Perfmon Available) is set to 0 and bit 12 (PEBS Unavailable) is set to 1. WRMSR(IA32_MISC_ENABLE) results in a #VE(CONFIG_PARAVIRT).

If TDCS.TD_CTL.S.REDUCE_VE is 1, then RDMSR(IA32_MISC_ENABLE) reads from a shadow value in TDVPS, and WRMSR(IA32_MISC_ENABLE) behaves as described in the table below.

Table 2.3: IA32_MISC_ENABLE (MSR 0x1A0) Virtualization when TDCS.TD_CTL.S.REDUCE_VE is Set to 1

Bit	Name	Access	Init Value of Shadow (in TDVPS)	On RDMSR	On WRMSR	Description
0	Fast-Strings Enable	RW	Native value	From shadow	To shadow	
3	Automatic Thermal Control Circuit Enable	RW	0	From shadow	To shadow	
7	Perfmon Available	RO	ATTRIBUTES.PERFMON	From shadow	Ignore	
11	BTS Unavailable	RO	Native (checked to be 1)	From shadow	Ignore	
12	PEBS Unavailable	RO	Native & ~ATTRIBUTES.PERFMON	From shadow	Ignore	
16	Enhanced Speed Step	RW	Virt. CPUID(1).ECX[7]	From shadow	If (virt. CPUID(1).ECX[7] == 0) and (value == 1), #GP. Else, write to shadow	Support paravirtualization
18	Enable MONITOR FSM	RW	Virt. CPUID(1).ECX[3]	From shadow	If (value is being modified), #VE(UNSUPPORTED_FEATURE). Else, write to shadow	Guest TD is not expected to change this bit.
22	Limit CPUID Max Leaf	RW	0	From shadow	If (value == 1), #VE(UNSUPPORTED_FEATURE). Value in shadow remains 0.	Simplify CPUID handling, not supposed to happen with modern OS
23	xTPR Message Disable	RW	0	From shadow	If (virt. CPUID(1).ECX[14] == 0) and (value == 1), #GP. Else, write to shadow	TDs are not allowed to broadcast IPIs. Host VMM can control this bit.
34	XD Bit Disable	RW	0	From shadow	If (value == 1), #GP. Value in shadow remains 0.	This bit is deprecated.
Other	Reserved	RO	0	From shadow	If (value == 1), #GP. Value in shadow remains 0.	

10

2.1.4. IA32_DEBUGCTL (MSR 0x1D9)

See the [Base Spec] section “On-TD Debug”.

2.1.5. IA32_X2APIC_* (MSRs 0x800 – 0x8FF)

See the [Base Spec] section “Virtual APIC Access by Guest TD”.

2.2. CPUID Virtualization

2.2.1. CPUID Virtualization Description Files

Most of the MSR virtualization information is provided in separate files:

- **cpuid_virtualization.pdf** provides a human-readable CPUID virtualization table.
- **cpuid_virtualization.csv** provides the same table in a Comma-Separated Values (CSV) format. This file can be imported, if required, to tools such as MS Excel for further processing.

The tables below describe the information provided by those files.

In addition to the above files, **cpuid_virtualization.json**, a JSON format file with the same information is provided.

Table 2.4: CPUID Virtualization Table Description

Column	Description
Leaf	Leaf number (EAX input to the CPUID instruction)
Sub-Leaf From	First sub-leaf number (ECX input to the CPUID instruction) in the range
Sub-Leaf To	Last sub-leaf number (ECX input to the CPUID instruction) in the range
Header	Leaf: Line is a leaf header Sub-Leaf: Line is a sub-leaf header Field: Line defines a bit field
Reg	Output register of the CPUID instruction
MSB	Most significant bit of the bit field
LSB	Least significant bit of the bit field
Field Size	Size of the bit field
Field Name	Name of the bit field
Configuration Details	Fields of TD_PARAMS input to TDH.MNG.INIT that are used to configure the bit fields
Bit or Field Virtualization Type	See the table below
Virtualization Details	See the table below

Table 2.5: Bit or Field Virtualization Type and Details

Bit or Field Virtualization	Meaning	Meaning of Virtualization Details
#VE	#VE injected to the TD	N/A
Attributes & Native	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's ATTRIBUTES, to either allow their native value or to have a value of 0.	Applicable ATTRIBUTES bit
Attributes & CPUID_Enabled & Native	Bits that the host VMM configures at guest TD initialization, by configuring the guest TD's ATTRIBUTES and the virtual value of some other CPUID field, to either allow their native value or to have a value of 0. These are typically CPU features that the host VMM can disable.	Applicable ATTRIBUTES and CPUID bits

Bit or Field Virtualization	Meaning	Meaning of Virtualization Details
Attributes & CPUID_Enabled & Configured & Native	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's ATTRIBUTES, the virtual value of some other CPUID field and direct configuration, to either allow their native value or to have a value of 0.	Applicable ATTRIBUTES bit and CPUID bit
Attributes & CPUID_Enabled & Native(Hybrid)	Bits that the host VMM configures at guest TD initialization, by configuring the guest TD's ATTRIBUTES and the virtual value of some other CPUID field, to either allow their native value or to have a value of 0. These are typically CPU features that the host VMM can disable. On Hybrid SOCs, value is uniform across all core types.	Applicable ATTRIBUTES and CPUID bits
Attributes & CPUID_Enabled & Configured & Native(Hybrid)	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's ATTRIBUTES, the virtual value of some other CPUID field and direct configuration, to either allow their native value or to have a value of 0. On Hybrid SOCs, value is uniform across all core types.	Applicable ATTRIBUTES bit and CPUID bit
Attributes & Configured & Native	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's ATTRIBUTES and direct configuration, to either allow their native value or to have a value of 0.	Applicable ATTRIBUTES bit
Attributes & Native (Hybrid)	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's ATTRIBUTES, to either allow their native value or to have a value of 0. On Hybrid SOCs, value is uniform across all core types.	Applicable ATTRIBUTES bit
CPUID_Enabled & Native	Bits that the host VMM configures at guest TD initialization, by configuring the virtual value of some other CPUID field, to either allow their native value or to have a value of 0. These are typically CPU features that the host VMM can disable.	Applicable CPUID bit
CPUID_Enabled (Dynamic) & Native	Bits that the host VMM configures at guest TD initialization, by configuring the virtual value of some other CPUID field, to either allow their native value or to have a value of 0. These are typically CPU features that either the host VMM or the guest TD can disable.	Applicable CPUID bit
Configured & Native	Bits that the host VMM directly configures at guest TD initialization, to either allow their native value or to have a value of 0. These are typically CPU features that the host VMM can disable.	N/A
Configured & Native	Bits that the host VMM directly configures at guest TD initialization, to either allow their native value or to have a value of 0. These are typically CPU features that the host VMM can disable. Special handling is applied.	N/A
XFAM & Native	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's XFAM, to either allow their native value or to have a value of 0.	Applicable XFAM bits
XFAM & CPUID_Enabled & Native	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's XFAM and the virtual value of some other CPUID field, to either allow their native value or to have a value of 0.	Applicable XFAM bits and CPUID bit

Bit or Field Virtualization	Meaning	Meaning of Virtualization Details
XFAM & CPUID_Enabled & Configured & Native	Bits that the host VMM directly configures at guest TD initialization, based on both the guest TD's XFAM, the virtual value of some other CPUID field and direct configuration, to either allow their native value or to have a value of 0.	Applicable XFAM bits and CPUID bit
XFAM & Configured & Native	Bits that the host VMM directly configures at guest TD initialization, based on both the guest TD's XFAM and direct configuration, to either allow their native value or to have a value of 0.	Applicable XFAM bits
XFAM & Native (Hybrid)	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's XFAM, to either allow their native value or to have a value of 0. On Hybrid SOCs, value is uniform across all core types.	Applicable XFAM bits
Calculated	Bit field is computed by the Intel TDX Module at TDH.SYS.INIT time	Calculation details
Configured	Bits fields that the host VMM directly configures at guest TD initialization	N/A
Configured	Bit fields that the host VMM directly configures at guest TD initialization, based on TD_PARAMS fields other than the above.	Applicable TD_PARAMS field
XFAM	Bits that the host VMM directly configures at guest TD initialization, based on the guest TD's XFAM.	Applicable XFAM bits
Calculated	Bit field is computed by the Intel TDX Module at TD run time	Calculation details
Fixed	Bit field is always reported as a fixed value to the TD.	Fixed value
Fixed	Bit field is always reported as a fixed value to the TD. Identical to FIXED, except that the init check must be VERIFY and the fixed value is taken from the init check value.	N/A, value is taken from the init check details
Native @ TD Init	Bit field value reflects the native value returned by executing CPUID at the time the TD was initialized (TDH.MNG.INIT)	N/A
Special	Bit field value is calculated in a special way	Special calculation details
Special	Bit field value is calculated in a special way, based on direct configuration by the host VMM	Special calculation details
Native @ TD Init with Special Handling	Bit field value reflects the native value returned by executing CPUID at the time the TD was initialized (TDH.MNG.INIT). Special handling is applied.	Special calculation details

3. Data Types

This section describes data types that are designed to be used by the Intel TDX Module.

3.1. Interface Function Completion Status

Note: This section provides a high-level overview of function completion status, as defined. Implementation details may differ.

A high-level definition of the interface functions completion status is provided in the [TDX Module Base Spec].

3.1.1. Function Completion Status Structure

Table 3.1: Intel TDX Interface Functions Completion Status (Returned in RAX) Definition

Bits	Name	Description
63	ERROR	Interface function aborted due to error. 0: Indicates that the function completed successfully – possibly with some warnings. 1: Indicates that the function aborted due to some error.
62	NON_RECOVERABLE	Recoverability hint: 0: Indicates that the function may possibly be retried after some conditions have been corrected. 1: Indicates that the error is probably not recoverable. In most cases, NON_RECOVERABLE is set only if ERROR is 1. However, TDH.VP.ENTER is a special case. TD entry may succeed (thus ERROR is 0) but later the TD failed in a non-recoverable way (thus NON_RECOVERABLE is 1).
61	FATAL	Fatality hint – applicable only for SEAMCALL. 0: Indicates that the TD can continue its normal lifecycle. 1: Indicates that the TD entered a state where it can only be torn down. E.g., when an import has failed, and the TD's OP_STATE is FAILED_IMPORT.
60	HOST_RECOVERABILITY_HINT	As a TDH.VP.ENTER output, indicates a TDCALL that resulted in a trap-like TD exit for which the host VMM needs to provide a recoverability hint in the following TD entry. On the following TDH.VP.ENTER, the host VMM provides a hint to the guest TD, which is the output of the TDCALL: 0: The host VMM hints that the guest-side function may possibly be retried (e.g., the host may have corrected some conditions). 1: The host VMM hints that the error is probably not recoverable.
59:48	RESERVED	Reserved – set to 0
47:40	CLASS	Class of the function completion status
39:32	DETAILS_L1	Details of the function completion status

Bits	Name	Description
31:0	DETAILS_L2	Additional details of the function completion status – e.g., includes: • Implicit or explicit operand identifier • CPUID leaf or sub-leaf • MSR index • VMCS field code • VM exit reason • CMR index • TDMR index

3.1.2. Function Completion Status Code Classes (Bits 47:40)

Table 3.2: Function Completion Status Code Classes (Bits 47:40) Definition

Class ID	Class Name	Description
0	General	General function completion status
1	Invalid Operand	An invalid operand value has been provided, e.g., HKID is out of range, HPA overlaps SEAMRR, GPA is not private, etc.
2	Resource Busy	The resource is busy, there is a concurrency conflict.
3	Page Metadata	Page metadata (in PAMT) are incorrect, e.g., page type is wrong.
4	Dependent Resources	The state of dependent resources is incorrect, e.g., there are TD pages while trying to reclaim a TDR page.
5	Intel TDX Module State	The Intel TDX Module state is incorrect.
6	TD State	The state of the TD is incorrect, e.g., it has not been initialized yet.
7	TD VCPU State	The state of the TD VCPU is incorrect, e.g., it is corrupted.
8	Key Management	The status code is related to key management, e.g., keys are not configured.
9	Platform	The status code is related to platform configuration or state.
10	Physical Memory	The status code is related to physical memory.
11	Guest TD Memory	The status code is related to guest TD memory.
12	Metadata	The status code is related to metadata (global scope, TD scope or VCPU scope)
13	Service TD	The status code is related to a service TD
14	Migration	The status code is related to TD migration
15	TDX I/O	The status code is related to TDX I/O
16	Measurement	The status code is related to TDX measurement
17	TD Partitioning	The status code is related to TD partitioning
255	Reserved	Reserved for use by host VMM or guest TD software This value is never used by the TDX Module.

3.1.3. Function Completion Status Codes and Operand IDs

Interface functions completion status codes and operand IDs are provided in separate files:

- **interface_functions_completion_status_details.pdf** and **interface_functions_completion_status_operand_ids.pdf** provides human-readable tables of the completion statuses and the operand IDs.
- **interface_functions_completion_status_details.csv** and **interface_functions_completion_status_operand_ids.csv** provides the same tables in a Comma-Separated Values (CSV) format. These files can be imported, if required, to tools such as MS Excel for further processing.

The tables below describe the information provided by those files.

In addition to the above files, **interface_functions_completion_status.json**, a JSON format file with the same information is provided.

Table 3.3: Function Completion Status Table Description

Column	Description	
Base Value (Bits 63:32, Hex)	Base value of the status code	
Status	Value	Details
	Success	The operation is successful.
	Error	The operation resulted in an error.
	Recover. Error	The operation resulted in an error but may be retried by the caller.
	Host Recover. Error	The operation resulted in an error but may be retried after some host VMM recovery.
	Non-Recover.	TD exit operation is successful from the TDX Module perspective, but VCPU state is non-recoverable due to TD s/w operation that caused a triple-fault condition.
	Fatal	The operation resulted in a fatal error; the TD is disabled and should be torn down
Name	Status name	
DETAILS_L2 (Bits 31:0)	Additional details of the function completion status. For Operand IDs, see the table below.	
Description	Status description	

Table 3.4: Function Completion Operand ID Table Description

Column	Description
Operand ID	Operand ID value
Explicit/Implicit	Whether the operand was an explicit input of the interface function
Operand	Operand name
Description	Operand description

3.2. Basic Crypto Types

Table 3.5: Basic Crypto Types

Name	Size (Bytes)	Description
SHA384_HASH	48	384-bit buffer containing the result of a SHA384 hash calculation
KEY128	16	128-bit key
KEY256	32	256-bit key

3.3. TDX Module Configuration, Enumeration, Initialization and Lifecycle Types

- 5 **Note:** This section describes configuration, enumeration and initialization types, as defined. Implementation may differ.

3.3.1. CPUID_CONFIG

- 10 CPUID_CONFIG is designed to enumerate how the host VMM may configure the virtualization done by the Intel TDX Module for a single CPUID leaf and sub-leaf. An array of CPUID_CONFIG entries is used for the Intel TDX Module enumeration by TDH.SYS.INFO.

Table 3.6: CPUID_CONFIG Definition

Field	Offset (Bytes)	Size (Bytes)	Description
LEAF	0	4	EAX input value to CPUID
SUB_LEAF	4	4	ECX input value to CPUID A value of -1 indicates a CPUID leaf with no sub-leaves.
EAX	8	4	Enumeration of the configurable virtualization of the value returned by CPUID in EAX: a value of 1 in any of the bits indicates that the host VMM is allowed to configure that bit
EBX	12	4	Enumeration of the configurable virtualization of the value returned by CPUID in EBX: a value of 1 in any of the bits indicates that the host VMM is allowed to configure that bit
ECX	16	4	Enumeration of the configurable virtualization of the value returned by CPUID in ECX: a value of 1 in any of the bits indicates that the host VMM is allowed to configure that bit
EDX	20	4	Enumeration of the configurable virtualization of the value returned by CPUID in EDX: a value of 1 in any of the bits indicates that the host VMM is allowed to configure that bit

3.3.2. TDX Module Version

The TDX Module version is enumerated as five fields, as shown in the table below. When written as a string, the fields are separated by a dot, e.g., “1.5.08.04.0234”.

Table 3.7: TDX Module Version Definition

Field	As Text	Size (Bytes)	Description
MAJOR_VERSION and MINOR_VERSION	1 digit each, e.g., “1.5”	16 bits each	Together, represent the main version number of the TDX Module. Usually related to the supported SOCs.
UPDATE_VERSION	2 digits, e.g., “1.5.08”	16 bits	A sub-version of the major/minor version. The update version number is incremented after every production-signed drop of the TDX Module. E.g., if version 1.5.01 is production-signed, the next drop will not use 01 as its update version, regardless of being a production-signed drop or not.
INTERNAL_VERSION	2 digits, e.g., “1.5.08.04”	16 bits	A sub-version of the update version. Denotes internal release number.
BUILD_NUM	4 digits, e.g., “1.5.08.04.0234”	16 bits	A unique build number

3.3.3. Global-Scope (TDX Module) Metadata

TDX Module global scope fields provide enumeration information about the Intel TDX Module. They are used with the TDH.SYS.RD, TDH.SYS.RDALL, TDG.SYS.RD and TDG.SYS.RDALL functions.

3.3.3.1. TDX Features Enumeration

- 10 The main enumeration of features supported by the TDX Module is provided by the TDX_FEATURES array of 64-bit metadata fields. The number of fields is enumerated by NUM_TDX_FEATURES.

The TDX Module features of TDX 1.0 are considered a baseline. TDX_FEATURES enumerate features beyond that baseline.

Table 3.8: TDX_FEATURES0 Definition

Bit(s)	Name	Description
0	TD_MIGRATION	The TDX Module supports TD migration. Further information is provided by the Migration fields.
1	TD_PRESERVING	The TDX Module supports TD preserving updates. Further information is provided by the TDX Module Handoff metadata fields.
2	SERVICE_TD	The TDX Module supports Service TDs. Further information is provided by the Service TD fields.
3	ENHANCED_METADATA	The TDX Module supports enhanced metadata interface functions: - Version 1 of previously existing functions: TDH.MNG.RD, TDH.VP.RD and TDG.VM.RD. - New functions: TDH.SYS.RD, TDH.SYS.RDALL, TDG.SYS.RD, TDG.SYS.RDALL, TDG.VP.RD/WR.
4	RELAXED_MEM_MNG	The TDX Module’s memory management requirements are relaxed vs. TDX 1.0:

Bit(s)	Name	Description
		- Many interface functions allow concurrent memory management operations by exclusively locking specific Secure EPT entries instead of the whole Secure EPT tree: - TDH.MEM.PAGE.AUG/DEMOTE/PROMOTE/RELOCATE/REMOVE - TDH.MEM.SEPT.ADD - TLB tracking (e.g., TDH.MEM.RANGE.BLOCK followed by TDH.MEM.TRACK and IPIs) may be skipped if the TD's OP_STATE is such that the TD can't be running, i.e., in the following cases: - On normal TD build, the TD's measurement has not yet been finalized by TDH.MR.FINALIZED. - The TD has been paused for export by TDH.EXPORT.PAUSE, and export has not been aborted by TDH.EXPOR.ABORT. - On import, TD execution has been enabled by TDH.IMPORT.COMMIT or TDH.IMPORT.END.
5	CPUID_VIRT_GUEST_CTRL	Guest TD may request that on certain CPUID leaves/sub-leaves a #VE(CONFIG_PARAVIRT) will always be injected, using the TDG.VP.RD/WR to access the TDVPS' CPUID_CONTROL fields.
6	TDX_CONNECT	Both the TDX Module and the CPU support TDX Connect, and TDX Connect has been enabled.
7	TD_PARTITIONING	The TDX Module supports TD partitioning: - New interface functions: TDG.MEM.PAGE.ATTR.RD/WR, TDG.VP.ENTER, TDG.VP.INVEPT, TDG.VP.INVGLA - Version 1 of existing interface functions: TDH.MEM.PAGE.PROMOTE, TDH.MEM.SEPT.ADD, TDH.MEM.SEPT.REMOVE - Backward-compatible updates to existing interface functions, with new input and/or output operands.
8	LOCAL_ATTESTATION	The TDX Module supports local attestation: New interface function: TDG.MR.VERIFYREPORT
9	TD_ENTRY_ENHANCEMENTS	The TDX Module supports the following TD entry enhancements: HOST_RECOVERABILITY_HINT: On trap-like asynchronous TD exit, bit 60 of the TDH.VP.ENTER completion status (returned in RAX) may be set to 1. In this case, the host VMM may set the following TD entry's input value of RCX' HOST_RECOVERABILITY_HINT bit; this bit is copied to the guest RAX bit 60, which the guest interprets as part of a TDCALL completion status.
10	HOST_PRIORITY_LOCKS	The TDX Module implements host-priority locks to avoid denial-of-service by guest TDs. This requires the host VMM to retry operations that fail with a TDX_OPERAND_BUSY status.
11	CONFIG_IA32_ARCH_CAPABILITIES	The TDX Module allows the host VMM to configure the virtualization of IA32_ARCH_CAPABILITIES MSR.
12	HW_SEALING	The TDX Module supports hardware-bound sealing: New interface functions: TDG.MR.KEY.GET
13	S4	The TDX Module supports state hibernation and restoration across S4 CPU state: - New interface function: TDH.SYS.S4_END - New input flag to TDH.EXPORT/IMPORT.STATE.IMMUTABLE
14	ACT	The TDX Module manages memory access control using the CPU's Access Control Table (ACT).

Bit(s)	Name	Description
15	WBINVD_DOMAINS	TDH.PHYMEM.CACHE.WB needs to be called per WBINVD domain that might be different than a whole package. WBINVD domains are enumerated with the WBINVD_DOMAIN* metadata fields. If SKIP_PHYMEM_CACHE_WB (bit 34) is 1, then WBINVD_DOMAINS is 0.
16	PENDING_EPT_VIOLATION_V2	The TDX Module supports enhanced handling of EPT violation on guest TD access to PENDING pages: - Decision on whether a #VE(PENDING) is injected into the guest TD can be guest configurable. - Extended exit qualification is provided to the host VMM. - EPT violation on L2 VM access to a PENDING page always causes an L2→L1 exit.
17	FMS_CONFIG	The TDX Module supports configuration of virtual CPUID(1).EAX (Family/Model/Stepping) value for migratable TDs.
18	NO_RBP_MOD	The TDX Module supports a TD configuration where RBP is never modified by any host-side (SEAMCALL) and guest-side (TDCALL) interface function. This is configured by TD_PARAMS.CONFIG_FLAGS.NO_RBP_MOD (see 3.4.3).
19	L2_TLB_INVLD_OPT	The TDX Module supports additional address translation invalidation modes on TDG.VP.ENTER.
20	TOPOLOGY_ENUM	The TDX Module supports virtual topology enumeration and configuration of CPUID(0xB), CPUID(0x1F) and x2APIC ID.
21	PARTITIONED_TD_MIGRATION	The TDX Module supports migration of partitioned TDs.
22	TD_SIGNING_AND_SVN	The TDX Module supports the following: - REPORTTYPE.VERSION value of 2 - TDSIGSTRUCT - Additional attestation configuration (MRSIGNER, PRODIG, etc.) - TDG.MR.ASSIGNSVNS interface function
23	CLFLUSH_BEFORE_ALLOC	When allocating a memory page to be used as TD private memory or TD control structure page, the host VMM is required to ensure that none of the cache lines associated with the page is in a MODIFIED state.
24	EVENT_FILTERING	The TDX Module supports filtering of performance monitoring events, based on configuration by the host VMM as part of TDH.MNG.INIT.
25	ICSSD	Instruction-Count based Single-Step Defense: Indicates that the TDX Module supports single-step attack detection based on counting TD VCPU instructions. This feature is only available for guest TDs where performance monitoring is not enabled (ATTRIBUTES.PERFMON == 0).
26	FIXED_CTR12_PROF	System profiling by IA32_FIXED_CTR1 and IA32_FIXED_CTR2 is supported. IA32_FIXED_CTR1 and IA32_FIXED_CTR2 continue counting while the TDX Module is running. If a TD is not enabled for performance monitoring (ATTRIBUTES.PERFMON == 0) and not debuggable (ATTRIBUTES.DEBUG == 0) then the counters continue counting while that TD is running.
27	MAXPA_VIRT	The TDX Module supports virtualization of physical address width, as enumerated by CPUID(0x80000008).EAX[7:0].

Bit(s)	Name	Description
28	APX	The TDX Module supports Intel® APX (Advanced Performance Extensions). Note: This bit may be set regardless of CPU support of APX.
29	CPUID2_VIRT	The TDX Module supports virtualization of CPUID(2)
30	VE_REDUCTION	The TDX Module supports run time controls by the guest TD to reduce the cases where #VE is injected by the TDX Module on guest TD execution of CPUID, RDMSR/WRMSR and other instructions. Note: VE_REDUCTION implies TOPOLOGY_ENUM and CPUID2_VIRT.
31	ENHANCED_EVENT_FILTERING	The TDX Module supports enhanced filtering of performance monitoring events, based on configuration by the host VMM as part of TDH.MNG.INIT.
32	TDX_CONNECT_PARTITIONING	The TDX Module supports TDX Connect for partitioned TDs.
33	MAXGPA_VIRT	The TDX Module supports virtualization of guest physical address width, as enumerated by CPUID(0x80000008).EAX[23:16].
34	SKIP_PHYMEM_CACHE_WB	The host VMM needs not call TDH.PHYMEM.CACHE.WB as part of the TD teardown sequence.
35	NON_BLOCKING_RESIZE	The TDX Module supports TDH.MEM.PAGE.DEMOTE and TDH.MEM.PAGE.PROMOTE without blocking and TLB tracking.
36	DYNAMIC_PAMT	The TDX Module supports dynamic PAMT mode, where PAMT entries are dynamically allocated by the host VMM.
37	FATAL_DIAGNOSTICS	The TDX Module provides diagnostic information in case of a fatal error.
38	PAGE_RELEASE	The TD may release memory pages using TDG.MEM.PAGE.RELEASE.
39	NRX	The TDX Module supports non-root extensions.
40	ENHANCED_INTR_STATE	The TDX Module supports additional interrupt state indications by TDVPS.VCPU_STATE_DETAILS and the IMM_RESUME_HINT output flag of TDH.VP.ENTER.
41	NON_BLOCKING_EXPORT	The TDX Module supports TD migration non-blocking export, based on Secure EPT entries' Dirty bit.
42	PERF_MASK	The TDX Module supports partial allocation of Perfmon counters to a TD.
43	SCAN_EXPORT_RESTORE	The TDX Module supports the EXPORT_RESTORE operation of TDH.MEM.SCAN.
44	IMPORT_PAGE_STATUS	TDH.IMPORT.MEM provides status for pages in its page list.
45	ENHANCED_INTR_VIRTUALIZATION	The TDX Module supports enhanced interrupt virtualization, including posted interrupt and IPI processing.
46	VEINFO_INTR_STATE	The TDX Module supports returning the guest interruptibility state by TDG.VP.VEINFO.GET.
47	UPDATE_COMPATIBILITY	The TDX Module supports enhancements to verify TD-preserving update compatibility, either before or after update.
48	SERVTD_REBIND	The TDX Module supports rebinding a new Service TD to a TD.
49	TDID_VMID_REPORTING	The TDX Module supports TDID256 and VMID as a field of TDREPORT_STRUCT.
50	RESERVED	Set to 0

Bit(s)	Name	Description
51	ENHANCED_DEMOTE_INTERRUPTIBILITY	Indicates that TDH.MEM.PAGE.DEMOTE is not interruptible when the TD is not partitioned (no L2 VMs).
52	DEBUG_RO_TD_MIGRATION	Indicates that the TDX Module supports debuggable (read only) TD migration. TD memory and TD metadata fields that are non-writable in production mode remain non-writable.
53	SYS_DISABLE	The TDX Module supports TDH.SYS.DISABLE.
54	LIST_ERROR_COUNT	The TDX Module supports returning a list error count by interface functions which process an input list: TDH.EXPORT.BLOCKEDW, TDH.EXPORT.MEM, TDH.EXPORT.RESTORE and TDH.IMPORT.MEM
55	MIG_SETUP	The TDX Module supports the TD Migration session setup service, using TDH.MIG.SETUP.
56	SEALKEY_128	Indicates that the TDX Module supports a 128-bit sealing key. SEALKEY_128 is applicable only if HW_SEALING (bit 12) is set to 1. Otherwise, its value is 0.
57	SEALKEY_256	Indicates that the TDX Module supports a 256-bit sealing key. SEALKEY_256 is applicable only if HW_SEALING (bit 12) is set to 1. Otherwise, its value is 0.
58	SYS_WR	The TDX Module supports TDH.SYS.WR
63:59	RESERVED	Set to 0

Table 3.9: TDX_FEATURES1 Definition

Bit(s)	Name	Description
63:0	RESERVED	Set to 0

3.3.3.2. Global Metadata Fields

5 3.3.4. Global Metadata Description Files

Most of the TD-scope metadata information is provided in separate files:

- **global_metadata.pdf** provides a human-readable TD-scope metadata table.
- **global_metadata.csv** provides the same table in a Comma-Separated Values (CSV) format. This file can be imported, if required, to tools such as MS Excel for further processing.

10 The tables below describe the information provided by those files.

In addition to the above files, **global_metadata.json**, a JSON format file with the same information is provided.

Table 3.10: Global Metadata Table Description

Column	Description
TDX_FEATURES Enum. Bits	The set of TDX_FEATURES field bits, readable by TD*.SYS.RD*, which enumerate support for this field. One or more comma-separated bit numbers may be specified. If the value of any of those bits is, the field is supported. The special value “Always” means that the field is always supported. The special value “None” means that there is no enumeration for the support of this field. This is only used for fields that are accessible only for debuggable TDs.
Class	Field class, see below for details
Field	Field name

Column	Description
Description	Field description
Type	Field type
Field Size (Bytes)	Field size
Max Num Fields	Maximum number of fields in an array. The description text specified how the actual number of fields is enumerated. A value of “None” indicates that no maximum number is specified.
Num Elem.	Number of elements within each field
Elem. Size (Bytes)	Size of each element
Base FIELD_ID (Hex)	Base FIELD_ID
VMM Access	Host VMM access
Guest Access	Guest TD access

3.3.5. CMR_INFO

CMR_INFO is designed to provide information about a Convertible Memory Range (CMR), as configured by BIOS and checked and stored securely by MCHECK.

Note: CMR_INFO and TDH.SYS.INFO are provided for backward compatibility. TDH.SYS.RDALL is the recommended method to read Intel TDX Module information. See also 3.3.3 above.

Table 3.11: CMR_INFO Entry Definition

Name	Offset (Bytes)	Type	Size (Bytes)	Description
CMR_BASE	0	Physical Address	8	Base address of the CMR: since a CMR is aligned on 4KB, bits 11:0 are 0.
CMR_SIZE	8	Integer	8	Size of the CMR, in bytes: since a CMR is aligned on 4KB, bits 11:0 are 0. A value of 0 indicates a null entry.

TDH.SYS.INFO leaf function returns an array of CMR_INFO entries. The CMRs are sorted from the lowest base address to the highest base address, and they are non-overlapping.

3.3.6. TDSYSINFO_STRUCT

TDSYSINFO_STRUCT is designed to provide enumeration information about the Intel TDX Module. It is an output of the TDH.SYS.INFO leaf function.

Warning: TDSYSINFO_STRUCT and TDH.SYS.INFO are provided for backward compatibility; they do not provide all the TDX Module enumeration, and some fields (e.g., TDCS_BASE_SIZE) are limited in their forward compatibility. It is strongly recommended to use TDH.SYS.RD and/or TDH.SYS.RDALL to read Intel TDX Module information. See also 3.3.3 above.

TDSYSINFO_STRUCT's size is 1024B.

Table 3.12: TDSYSINFO_STRUCT Definition

Section	Field Name	Offset (Bytes)	Type	Size (Bytes)	Description
Intel TDX Module Info	ATTRIBUTES	0	Bitmap	4	Module attributes Bits 30:0 Reserved – set to 0 Bit 31 0 indicates a production module. 1 indicates a debug module.
	VENDOR_ID	4	Integer	4	0x8086 for Intel
	BUILD_DATE	8	BCD	4	Intel TDX Module build data – in yyyymmdd BCD format (each digit occupies 4 bits)
	BUILD_NUM	12	Integer	2	Build number of the Intel TDX Module
	MINOR_VERSION	14	Integer	2	Minor version number of the Intel TDX Module
	MAJOR_VERSION	16	Integer	2	Major version number of the Intel TDX Module
	SYS_RD	18	Boolean	1	A non-0 value indicates that the information in this structure is incomplete. TDH.SYS.RD or TDH.SYS.RDALL should be used to obtain TDX Module information.
	RESERVED	19	N/A	13	This field is reserved for enumerating future Intel TDX Module capabilities. Set to 0
Memory Info	MAX_TDMRS	32	Integer	2	The maximum number of TDMRs supported
	MAX_RESERVED_PER_TDMR	34	Integer	2	The maximum number of reserved areas per TDMR
	PAMT_ENTRY_SIZE	36	Integer	2	The size of a PAMT entry – determines the number of bytes that need to be reserved for the three PAMT areas: - PAMT_1G (1 entry per 1GB of TDMR) - PAMT_2M (1 entry per 2MB of TDMR) - PAMT_4K (1 entry per 4KB of TDMR)
	RESERVED	38	N/A	10	Set to 0

Section	Field Name	Offset (Bytes)	Type	Size (Bytes)	Description
Control Struct Info	TDCS_BASE_SIZE	48	Integer	2	Base value for the number of bytes required to hold TDCS
	RESERVED	50	N/A	2	Reserved for additional TDCS enumeration Set to 0
	TDVPS_BASE_SIZE	52	Integer	2	Base value for the number of bytes required to hold TDVPS
	RESERVED	54	N/A	10	Set to 0
TD Capabilities	ATTRIBUTES_FIXED0	64	Bitmap	8	If any certain bit is 0 in ATTRIBUTES_FIXED0, it must be 0 in any TD's ATTRIBUTES. The value of this field reflects the Intel TDX Module capabilities and configuration and CPU capabilities.
	ATTRIBUTES_FIXED1	72	Bitmap	8	If any certain bit is 1 in ATTRIBUTES_FIXED1, it must be 1 in any TD's ATTRIBUTES. The value of this field reflects the Intel TDX Module capabilities and configuration and CPU capabilities.
	XFAM_FIXED0	80	Bitmap	8	If any certain bit is 0 in XFAM_FIXED0, it must be 0 in any TD's XFAM.
	XFAM_FIXED1	88	Bitmap	8	If any certain bit is 1 in XFAM_FIXED1, it must be 1 in any TD's XFAM.
	RESERVED	96	N/A	32	Set to 0
	NUM_CPUID_CONFIG	128	Integer	4	Number of the following CPUID_CONFIG entries
	CPUID_CONFIG[0]	132	CPUID_CONFIG	24	Enumeration of the CPUID leaves/sub-leaves that contain bit fields whose virtualization by the Intel TDX Module is either: Directly configurable (CONFIG_DIRECT) by the host VMM

Section	Field Name	Offset (Bytes)	Type	Size (Bytes)	Description
	CPUID_CONFIG[last]		CPUID_CONFIG	24	Bits that the host VMM may allow to be 1 (ALLOW_*_DIRECT) and their native value, as returned by the CPU, is 1. See 3.3.1 for details. Note that the virtualization of many CPUID bit fields not enumerated in this list is configurable indirectly via the XFAM and ATTRIBUTES assigned to a TD by the host VMM.
Reserved	RESERVED		N/A		Fills up to the structure size (1024B) – set to 0

3.3.7. TDMR_INFO

TDMR_INFO is designed to provide information about a single Trust Domain Memory Region (TDMR) and its associated PAMT. It is used as an input to TDH.SYS.CONFIG.

5

Table 3.13: TDMR_INFO Entry Definition

Name	Offset (Bytes)	Type	Size (Bytes)	Description
TDMR_BASE	0	Physical Address	8	Base address of the TDMR (HKID bits must be 0): since a TDMR is aligned on 1GB, bits 29:0 are always 0.
TDMR_SIZE	8	Integer	8	Size of the TDMR, in bytes: must be greater than 0 and a whole multiple of 1GB (i.e., bits 29:0 are always 0).
PAMT_1G_BASE	16	Physical Address	8	Base address of the PAMT_1G range associated with the above TDMR (HKID bits must be 0): since a PAMT range is aligned on 4KB, bits 11:0 are always 0.
PAMT_1G_SIZE	24	Integer	8	Size (in bytes) of the PAMT_1G range associated with the above TDMR: since a PAMT range is aligned on 4KB, bits 11:0 are always 0. Enumeration: The size of each PAMT_1G entry (in bytes) is enumerated by PAMT_1G_ENTRY_SIZE, readable by TDH.SYS.RD*. The PAMT_1G range must be large enough to support the TDMR_SIZE specified above.
PAMT_2M_BASE	32	Physical Address	8	Base address of the PAMT_2M range associated with the above TDMR (HKID bits must be 0): since a PAMT range is aligned on 4KB, bits 11:0 are always 0.
PAMT_2M_SIZE	40	Integer	8	Size (in bytes) of the PAMT_2M range associated with the above TDMR: since a PAMT range is aligned on 4KB, bits 11:0 are always 0. Enumeration: The size of each PAMT_2M entry (in bytes) is enumerated by PAMT_2M_ENTRY_SIZE, readable by TDH.SYS.RD*.

Name	Offset (Bytes)	Type	Size (Bytes)	Description
				The PAMT_2M range must be large enough to support the TDMR_SIZE specified above.
PAMT_4K_BASE / PAMT_PAGE_BITMAP_BASE	48	Physical Address	8	Base address of the PAMT_4K range associated with the above TDMR (HKID bits must be 0): since this range is aligned on 4KB, bits 11:0 are always 0. If the TDX Module is configured for static PAMT (default), the PAMT_4K range contains the PAMT_4K table associated with the above TDMR. Else (the TDX Module is configured for dynamic PAMT), the PAMT_4K range contains the PAMT_PAGE_BITMAP associated with the above TDMR.
PAMT_4K_SIZE / PAMT_PAGE_BITMAP_SIZE	56	Integer	8	Size (in bytes) of the PAMT_4K range associated with the above TDMR: since a PAMT range is aligned on 4KB, bits 11:0 are always 0. Enumeration: If the TDX Module is configured for static PAMT (default), the size of each PAMT_4K entry (in bytes) is enumerated by PAMT_4K_ENTRY_SIZE, readable by TDH.SYS.RD*. Else (the TDX Module is configured for dynamic PAMT), the PAMT_4K range contains PAMT_PAGE_BITMAP. The size of each entry (in bits) is enumerated by PAMT_PAGE_BITMAP_ENTRY_BITS. In both cases, the PAMT_4K range must be large enough to support the TDMR_SIZE specified above.
RESERVED_OFFSET[0]	64	Integer	8	Offset of reserved range 0 within the TDMR. A reserved range is aligned on 4KB, thus bits 11:0 must be 0.
RESERVED_SIZE[0]	72	Integer	8	Size of reserved range 0 within the TDMR: - A size of 0 indicates a null entry. All the following reserved range entries must also be null. - A reserved range is aligned on 4KB, thus bits 11:0 must be 0.
RESERVED_OFFSET[N-1]	64 + 16*(N-1)	Integer	8	Offset of the last reserved range within the TDMR.
RESERVED_SIZE[N-1]	72 + 16*(N-1)	Integer	8	Size of the last reserved range within the TDMR.

Notes:

- The number of reserved areas within a TDMR is enumerated by TDX Module's MAX_RESREVED_PER_TDMR metadata field, which can be read using TDH.SYS.RD, TDH.SYS.RDALL or TDH.SYS.RDM. For details, see 3.3.63.3.3.
- For backward compatibility, this value is also enumerated by TDSYSINFO_STRUCT.MAX_RESREVED_PER_TDMR (see 3.3.6).
- Within each TDMR entry, all reserved areas must be sorted from the lowest offset to the highest offset, and they must not overlap with each other.
- All TDMRs and PAMTs must be contained within CMRs.

- A PAMT area must not overlap with another PAMT area (associated with any TDMR), and it must not overlap with non-reserved areas of any TDMR. PAMT areas may reside within reserved areas of TDMRs.

3.3.8. FATAL_INFO: TDX Module Fatal Error Logging Format

Enumeration: FATAL_INFO is applicable if TDX_FEATURES0.FATAL_DIAGNOSTICS (bit 37), readable by the host VMM using TDH.SYS.RD*, is 1.

3.3.8.1. Overview

FATAL_INFO is the information logged by the TDX Module if an internal sanity check detects an internal fatal error. It is a 64-byte data structure, residing in a memory location specified by the host VMM on TDH.SYS.INIT.

Depending on the fatal error case, FATAL_INFO may provide different information. The overall format of FATAL_INFO is shown below:

Table 3.14: FATAL_INFO Overall Format

Offset (Bytes)	Size (Bytes)	Name	Description
0	16	BASIC_INFO	Basic diagnostic information, same format for all error cases.
16	48	EXTENDED_INFO	Extended diagnostic information. Several formats are supported, as defined below.

3.3.8.2. FATAL_INFO Basic Format

Table 3.15: FATAL_INFO Basic Format

Offset (Bytes)	Size (Bytes)	Name	Description
0	1	STATE	State of FATAL_INFO
			Value Meaning
			0x00 FATAL_INFO does not contain valid information
			0x01 Information is being written by the TDX Module
			0xFE FATAL_INFO contains valid P-SEAMLDR fatal error information
			0xFF FATAL_INFO contains valid TDX Module fatal error information
			Other Reserved
1	1	FORMAT	Format of FATAL_INFO
			Value Meaning
			0 Basic information only
			1 Information for TD-specific errors: basic information + TD handle
			2 Information for Secure EPT related errors (with TD handle)
			3 Information for Secure EPT related errors (with EPTP)
			4 Information for page HPA related errors
			5 Information for PAMT related errors
			6 Information for an unexpected exception
			7 Information for an unexpected VM exit
			Other Reserved

Offset (Bytes)	Size (Bytes)	Name	Description
2	2	RESERVED	Reserved, set to 0
4	4	X2APIC_ID	X2APIC ID of the logical processor where the fatal error occurred
8	8	ERROR_ID	Identifies the place in the TDX Module code where the fatal error was identified. The meaning of ERROR_ID is not architectural. This identification is specific to the failing TDX Module release; it may not apply to other releases.
16	48	EXTENDED_INFO	Extended diagnostic information, per FORMAT. See below.

3.3.8.3. FATAL_INFO Format with TD Handle

This format is used when FATAL_INFO identifies a specific TD.

Table 3.16: FATAL_INFO with TD Handle

Offset (Bytes)	Size (Bytes)	Name	Description
0	16	BASIC_INFO	Basic diagnostic information
16	8	TD_HANDLE	Identifies the TD
			Bits Meaning
			11:0 Reserved, set to 0
			51:12 Bits 51:12 of the TDR HPA (HKID bits are 0)
24	40	RESERVED	63:52 Reserved, set to 0
			Reserved, set to 0

3.3.8.4. FATAL_INFO Format for Secure EPT Related Failures (with TD Handle)

This format is used when FATAL_INFO identifies an error related to Secure EPT, providing a TD handle.

Table 3.17: FATAL_INFO for Secure EPT Related Failures (with TD Handle)

Offset (Bytes)	Size (Bytes)	Name	Description
0	16	BASIC_INFO	Basic diagnostic information
16	8	TD_AND_VM	Identifies the TD and specific VM (L1 or L2)
			Bits Meaning
			11:0 Reserved, set to 0
			51:12 Bits 51:12 of the TDR HPA (HKID bits are 0)
			53:52 VM (L1 or L2) index
24	8	GPA_AND_LEVEL	63:54 Reserved, set to 0
			Identifies the guest physical address and the SEPT level
			Bits Meaning
			2:0 Offending Secure EPT entry level
			11:3 Reserved, set to 0

Offset (Bytes)	Size (Bytes)	Name	Description
			51:12 Bits 51:12 of the offending guest physical address
			63:52 Reserved, set to 0
32	8	SEPT_ENTRY	Secure EPT entry
40	24	RESERVED	Reserved, set to 0

3.3.8.5. *FATAL_INFO Format for Secure EPT Related Failures (with EPTP)*

This format is used when FATAL_INFO identifies an error related to Secure EPT, providing EPTP.

Table 3.18: FATAL_INFO for Secure EPT Related Failures (with EPTP)

Offset (Bytes)	Size (Bytes)	Name	Description
0	16	BASIC_INFO	Basic diagnostic information
16	8	EPTP	EPT Pointer
24	8	GPA_AND_LEVEL	Identifies the guest physical address and the SEPT level
			Bits Meaning
			2:0 Offending Secure EPT entry level
			11:3 Reserved, set to 0
			51:12 Bits 51:12 of the offending guest physical address
			63:52 Reserved, set to 0
32	8	SEPT_ENTRY	Secure EPT entry
40	24	RESERVED	Reserved, set to 0

3.3.8.6. *FATAL_INFO Format for HPA Related Failures*

This format is used when FATAL_INFO identifies an error related to page HPA.

Table 3.19: FATAL_INFO for Page HPA Related Failures

Offset (Bytes)	Size (Bytes)	Name	Description
0	16	BASIC_INFO	Basic diagnostic information
16	8	HPA	HPA that was used when a fatal error was detected NULL_PA (-1) if not applicable
24	1	SIZE	Page size (0: 4KB, 1: 2MB, 2: 1GB)
25	39	RESERVED	Reserved, set to 0

3.3.8.7. *FATAL_INFO Format for PAMT Related Failures*

This format is used when FATAL_INFO identifies an error related to PAMT.

Table 3.20: FATAL_INFO for PAMT Related Failures

Offset (Bytes)	Size (Bytes)	Name	Description
0	16	BASIC_INFO	Basic diagnostic information
16	16	PAMT_ENTRY	PAMT entry where a fatal error was detected 0 if not applicable
32	8	HPA	HPA that was used when a fatal error was detected NULL_PA (-1) if not applicable
40	1	LEVEL	Level of PAMT where a fatal error was detected
41	7	RESERVED	Reserved, set to 0
48	8	PAMT_PAGE	HPA or linear address (depending on the error case) of the PAMT page, if applicable.
56	8	RESERVED	Reserved, set to 0

3.3.8.8. FATAL_INFO Format for Unexpected Exceptions

This format is used when FATAL_INFO identifies an unexpected exception.

Table 3.21: FATAL_INFO for Unexpected Exceptions

Offset (Bytes)	Size (Bytes)	Name	Description
0	16	BASIC_INFO	Basic diagnostic information
16	1	VECTOR	Exception vector
17	47	RESERVED	Reserved, set to 0

3.3.8.9. FATAL_INFO Format for an Unexpected VM Exit Related Failures

This format is used when FATAL_INFO identifies an error related to an unexpected VM exit.

Table 3.22: FATAL_INFO for Unexpected VM Exit Related Failures

Offset (Bytes)	Size (Bytes)	Name	Description	
0	16	BASIC_INFO	Basic diagnostic information	
16	8	TD_AND_VM	Identifies the TD and specific VM (L1 or L2)	
			Bits	Meaning
			11:0	Reserved, set to 0
			51:12	Bits 51:12 of the TDR HPA (HKID bits are 0)
			53:52	VM (L1 or L2) index
			63:54	Reserved, set to 0
24	4	EXIT_REASON	The Exit Reason VMCS field	

Offset (Bytes)	Size (Bytes)	Name	Description
28	4	EXTENDED_INFO	- For an unexpected VM exit due to IDT vectoring information, this field will provide the VMCS IDT vectoring information field. - For an unexpected VM exit due to RDMSR or WRMSR, this field will provide the offending MSR index. - For an unexpected VM exit interruption information, this field will provide the VMCS interruption information field. - In other cases, this field will be set to 0.
32	32	RESERVED	Reserved, set to 0

3.4. TD Parameter Types

Note: This section describes TD parameter types, as defined. Implementation details may differ.

3.4.1. ATTRIBUTES

3.4.1.1. Overview

ATTRIBUTES is defined as a 64b field that specifies various attested guest TD attributes. ATTRIBUTES is provided by the host VMM as a guest TD initialization parameter as part of TD_PARAMS. It is reported to the guest TD by TDG.VP.INFO, TDG.VM.RD* and as part of TDREPORT_STRUCT returned by TDG.MR.REPORT. ATTRIBUTES is migrated to a destination platform as part of the immutable TD state export by TDH.EXPORT.STATE.IMMUTABLE and import by TDH.IMPORT.STATE.IMMUTABLE.

The ATTRIBUTES bits are divided into four groups, as shown in the table below, according to their impact on TD security:

- If any bit in the TUD group is set to 1, the guest TD is under off-TD debug and is untrusted.
- Bits in the TUP group indicate features that impact security and trust. It is up to the remote verifier to decide whether the impact on TD trustworthiness is acceptable.
- Bits in the SEC group indicate features that may impact TD security but are not considered as impacting TD trust. Bits in the SEC group may have a positive or a negative impact on the TD security if set, as specified in the table.
- Bits in the OTHER group indicate features that are attested but do not impact TD security.

The table below shows the whole set of ATTRIBUTES bits that have been defined. However, the following must be noted:

- Some versions of the TDX Module may not support some of the ATTRIBUTES bits. E.g., for a TDX Module that does not support TD Migration, the MIGRATABLE bit must always be 0.
- Some of the ATTRIBUTES bits depend on CPU support. E.g., for a CPU does not support LASS, the LASS bit must be 0.

3.4.1.2. Notes

- The host VMM can determine the supported set of ATTRIBUTES bits by reading the ATTRIBUTES_FIXED0 and ATTRIBUTES_FIXED1 fields using TDH.SYS.RD/RDALL.
- The attestation infrastructure may evaluate a TD's ATTRIBUTES based on the negative or positive security impact of each bit. For example, if a new version of the TDX Module uses the currently reserved bit 25, the attestation infrastructure can know that this bit has a negative security impact when set, even without knowing the meaning of the bit.
- TD configuration that does not need to be attested (normally because it doesn't impact TD security) is not included in ATTRIBUTES. See the definition of CONFIG_FLAGS, CPUID configuration and other fields of TD_PARAMS in the following sections.

3.4.1.3. Definition

Table 3.23: ATTRIBUTES Definition

Bits	Group	Description	Bits	Bit Name	TD Security Impact if 1	Description
3:0	TUD	TD Under Debug If any of the bits in this group are set to 1, the guest TD is untrusted.	0	DEBUG	Negative	Guest TD runs in off-TD debug mode. Its VCPU state and private memory are accessible by the host VMM. The inter-dependency of DEBUG and other TD configurations is described below.
			3:1	RESERVED	Negative	Reserved for future TUD flags – must be 0
15:4	TUP	TD Under Profiling The TD is subject to profiling, which may expose side channel information to untrusted entities.	4	HGS_PLUS_PROF	Negative	The TD is subject to HGS+ operation. HGS+ monitors the TD operation as part of the whole system. This bit may be set, if supported by the TDX Module, regardless of CPU support.
			5	PERF_PROF	Negative	The TD is subject to system profiling using performance monitoring counters. Those counters are not context-switched on TD entry and exit; they monitor the TD operation as part of the whole system. This bit may be set, if supported by the TDX Module, regardless of CPU support.
			6	PMT_PROF	Negative	The TD is subject to system profiling using core out-of-band telemetry. Core telemetry monitors the TD operation as part of the whole system. This bit may be set, if supported by the TDX Module, regardless of CPU support.
			15:7	RESERVED	Negative	Reserved for future TUP flags – must be 0
31:16	SEC	Security Attributes that may impact TD security	16	ICSSD	Positive	Indicates that the TDX Module must use Instruction-Count based Single-Step Defense to protect against single-step attacks. The inter-dependency of ICSSD and other TD configurations is described below. This bit may only be set if the TDX Module supports ICSSD.
			17	SERVTD_EXT	Positive	Indicates that TDREPORT_STRUCT includes a hash of SERVTD_EXT_STRUCT instead of SERVTD_HASH.
			22:18	RESERVED_P	Positive	Reserved for future SEC flags that will indicate a positive impact on TD security. As an input to TDH.MN.INIT, must be 0. Attestation verifiers may allow any value.
			26:23	RESERVED_N	Negative	Reserved for future SEC flags that will indicate negative impact on TD security – must be 0
			27	LASS	Positive	TD is allowed to use Linear Address Space Separation.

Bits	Group	Description	Bits	Bit Name	TD Security Impact if 1	Description
						This bit may only be set if both the TDX Module and the CPU support LASS.
			28	SEPT_VE_DISABLE	Negative	Disable EPT violation conversion to #VE(PENDING) on guest TD access of PENDING pages
			29	MIGRATABLE	Negative	TD is migratable (using a Migration TD). The inter-dependency of MIGRATABLE and other TD configurations is described below. This bit may only be set if the TDX Module supports TD Migration.
			30	PKS	Positive	TD is allowed to use Supervisor Protection Keys. This bit may only be set if both the TDX Module and the CPU support PKS.
			31	RESERVED¹	Positive	Reserved
55:32	RESERVED	Reserved	55:32	RESERVED	None	Reserved for future expansion of the SEC group - must be 0
63:56	OTHER	Attributes that are attested but do not impact TD security	61:56	RESERVED	None	Reserved for future OTHER flags – must be 0
			62	TPA	None	The TD is a TDX Connect Provisioning Agent. This bit may only be set if both the TDX Module and the CPU support TDX Connect.
			63	PERFMON	None	TD is allowed to use Perfmon and PERF_METRICS capabilities. The inter-dependency of PERFMON and other TD configurations is described below. This bit may only be set if the TDX Module supports Performance Monitoring virtualization.

3.4.1.4. Inter-Dependency of ATTRIBUTES and other TD Configurations

If ATTRIBUTES.DEBUG is set to 1, the following condition must be true:

- If the TDX Module does not support debuggable (read only) TD migration, as enumerated by TDX_FEATURES0.DEBUG_RO_TD_MIGRATION, ATTRIBUTES.MIGRATABLE must be 0.

If ATTRIBUTES.ICSSD is set to 1, the following condition must be true:

- ATTRIBUTES.PERFMON must be 0.

If ATTRIBUTES.MIGRATABLE is set to 1, all the following conditions must be true:

- If the TDX Module does not support debuggable (read only) TD migration, as enumerated by TDX_FEATURES0.DEBUG_RO_TD_MIGRATION, ATTRIBUTES.DEBUG must be 0.
- ATTRIBUTES.PERFMON must be 0.
- CONFIG_FLAGS.TDX_CONNECT must be 0.

¹ This bit was formerly called KL; it was used to control whether the TD is allowed to use Key Locker. However, the Key Locker CPU feature is deprecated and is not supported by any CPU that supports TDX.

If ATTRIBUTES.PERFMON is set to 1, all the following conditions must be true:

- ATTRIBUTES.ICSSD must be 0.
- ATTRIBUTES.MIGRATABLE must be 0.

3.4.2. XFAM

5 Intel SDM, Vol. 1, 13 Managing State Using the XSAVE Feature Set
Intel SDM, Vol. 3, 13 System Programming for Instruction Set Extensions and Processor Extended State

Intel TDX Module extended state handling is described in the [TDX Module Base Spec].

XFAM (eXtended Features Available Mask) is defined as a 64b bitmap, which has the same format as XCR0 or IA32_XSS MSR. XFAM determines the set of extended features available for use by the guest TD. XFAM is provided by the host VMM as a guest TD initialization parameter as part of TD_PARAMS. It is reported to the guest TD by CPUID(0x0D, 0x01) and as part of TDREPORT_STRUCT returned by TDG.MR.REPORT.

The Intel TDX Module and the Intel® Architecture impose some rules on how the bits of XFAM may be set. See the [TDX Module Base Spec] for details.

Support of XFAM bits depend on CPU support and TDX Module support. The supported bit values can be enumerated by reading the XFAM_FIXED_0 and XFAM_FIXED_1 fields using TDH.SYS.RD/RDALL.

3.4.3. CONFIG_FLAGS

CONFIG_FLAGS is a set of TD configuration flags.

Table 3.24: TD_PARAMS_STRUCT.CONFIG_FLAGS Definition

Bits	Name	Description
0	GPAW	GPAW (Guest Physical Address Width²) controls the position of the SHARED bit in GPA. It is copied to each TD VMCS and L2 VMCS GPAW execution control on TDH.VP.INIT and TDH.IMPORT.STATE.VP. 0: GPA.SHARED bit is GPA[47] 1: GPA.SHARED bit is GPA[51] A value of 1 can only be specified if EPTP_CONTROLS[5:3] is specified as 4 (i.e., 5-level EPT). For details, see the [TDX Arch Extensions Spec].
1	FLEXIBLE_PENDING_VE	Controls the guest TD's ability to change the PENDING page access behavior from its default value: 0: The guest TD cannot change the behavior set by ATTRIBUTES.SEPT_VE_DISABLE. 1: The guest TD can change the default behavior set by ATTRIBUTES.SEPT_VE_DISABLE. Enumeration: Availability of FLEXIBLE_PENDING_VE is enumerated by TDX_FEATURES0.PENDING_EPT_VIOLATION_V2 (bit 16) and by CONFIG_FLAGS_FIXED0/1, readable using TDH.SYS.RD*.

² The name is misleading, since the GPA width is not determined by GPAW.

Bits	Name	Description
2	NO_RBP_MOD	Controls whether RBP value can be modified by TDG.VP.VMCALL and TDH.VP.ENTER: 0: RBP can be used as an input to TDG.VP.VMCALL. The value provided by the guest TD is used as an output of TDH.VP.ENTER. The value provided by the host TD to the following TDH.VP.ENTER is used as an output of TDG.VP.VMCALL. 1: RBP can't be used as an input to TDG.VP.VMCALL. TDG.VP.VMCALL preserves the guest TD's value of RBP. TDH.VP.ENTER preserves the host VMM's value of RBP. Enumeration: Availability of NO_RBP_MOD is enumerated by TDX_FEATURES0.NO_RBP_MOD (bit 18) and by CONFIG_FLAGS_FIXED0/1, readable using TDH.SYS.RD*.
3	MAXPA_VIRT	Controls virtualization of physical address width, as enumerated by CPUID(0x80000008).EAX[7:0]: 0: The virtual value of CPUID(0x80000008).EAX[7:0] is set to the native value of that field. The virtual value of CPUID(0x80000008).EAX[23:16] is determined by the setting of MAXGPA_VIRT (bit 4 below). 1: MAXGPA_VIRT (bit 4 below) must be set to 0. The virtual value of CPUID(0x80000008).EAX[7:0] is configured by the host VMM. The virtual value of CPUID(0x80000008).EAX[23:16] is set to 0. For details, see the [Base Spec] discussion of GPA space size virtualization. Enumeration: Availability of MAXPA_VIRT is enumerated by TDX_FEATURES0.MAXPA_VIRT (bit 27) and by CONFIG_FLAGS_FIXED0/1, readable using TDH.SYS.RD*.
4	MAXGPA_VIRT	Controls virtualization of guest physical address width, as enumerated by CPUID(0x80000008).EAX[23:16]: 0: The virtual value of CPUID(0x80000008).EAX[7:0] is determined by the setting of MAXPA_VIRT (bit 3 above). The virtual value of CPUID(0x80000008).EAX[23:16] is set to 0. 1: MAXPA_VIRT (bit 3 above) must be set to 0. The virtual value of CPUID(0x80000008).EAX[7:0] is set to the native value of that field. The virtual value of CPUID(0x80000008).EAX[23:16] is set depending on the value of GPAW (bit 0 above) and the native value of CPUID(0x80000008).EAX[7:0]. For details, see the [Base Spec] discussion of GPA space size virtualization. Enumeration: Availability of MAXGPA_VIRT is enumerated by TDX_FEATURES0.MAXGPA_VIRT (bit 33) and by CONFIG_FLAGS_FIXED0/1, readable using TDH.SYS.RD*.

Bits	Name	Description
5	TDX_CONNECT	Enables TDX Connect for the current TD: 0: TDX Connect is disabled. 1: TDX Connect is enabled. TDX_CONNECT may not be set if ATTRIBUTES.MIGRATABLE is 1 and the TDX module has been configured for write-blocking based export. Enumeration: Availability of TDX_CONNECT is enumerated by TDX_FEATURES0.TDX_CONNECT (bit 6) and by CONFIG_FLAGS_FIXED0/1, readable using TDH.SYS.RD*.
6	PAGE_RELEASE	Enables TDG.MEM.PAGE.RELEASE for the current TD. If TDX_CONNECT above is set to 1, PAGE_RELEASE is implicitly set to 1. Enumeration: Availability of PAGE_RELEASE is enumerated by TDX_FEATURES0.PAGE_RELEASE (bit 38) and by CONFIG_FLAGS_FIXED0/1, readable using TDH.SYS.RD*.
7	SEALING	Enables TDG.MR.GEY.GET for the current TD. Enumeration: Availability of SEALING is enumerated by TDX_FEATURES0.HW_SEALING (bit 12) and by CONFIG_FLAGS_FIXED0/1, readable using TDH.SYS.RD*.
63:8	RESERVED	Must be 0

3.4.4. CPUID_VALUES

CPUID_VALUES is defined as a 128b structure composed of four 32b fields representing the values returned by CPUID in registers EAX, EBX, ECX and EDX. An array of CPUID_RET is used during guest TD configuration by TDH.MNG.INIT.

Table 3.25: CPUID_VALUES Definition

Field	Offset (Bytes)	Size (Bytes)	Description
EAX	0	4	Value returned by CPUID in EAX
EBX	4	4	Value returned by CPUID in EBX
ECX	8	4	Value returned by CPUID in ECX
EDX	12	4	Value returned by CPUID in EDX

3.4.5. TD_PARAMS

TD_PARAMS is provided as an input to TDH.MNG.INIT, and some of its fields are included in the TD report. The format of this structure is valid for a specific MAJOR_VERSION of the Intel TDX Module, as reported by TDH.SYS.RD/RDALL or TDH.SYS.INFO.

TD_PARAMS' size is 1024B.

Table 3.26: TD_PARAMS Definition

Field	Offset (Bytes)	Type	Size (Bytes)	Description	Included in TDREPORT?
ATTRIBUTES	0	64b bitmap (see 3.4.1)	8	TD attributes: the value set in this field must comply with ATTRIBUTES_FIXED0 and ATTRIBUTES_FIXED1 enumerated by TDH.SYS.RD/RDALL or TDH.SYS.INFO.	Yes
XFAM	8	64b bitmap in XCRO format	8	Extended Features Available Mask: indicates the extended state features allowed for the TD. XFAM's format is the same as XCRO and IA32_XSS MSR. The value set in this field must satisfy the following conditions: - Natively valid value for XCRO and IA32_XSS (does not contain reserved bits, features not supported by the CPU, or invalid bit combinations) - Complies with XFAM_FIXED0 and XFAM_FIXED1 as enumerated by TDH.SYS.RD/RDALL or TDH.SYS.INFO.	Yes
MAX_VCPUS	16	Unsigned 16b Integer	2	Maximum number of VCPUs Must be higher than 0. Must not be higher than MAX_VCPUS_PER_TD, which may be read by TDH.SYS.RD*.	No
NUM_L2_VMS	18	Unsigned 8b Integer	1	Number of L2 VMs May be between 0 and 3. A value of 0 indicates no TD Partitioning is supported.	No
MSR_CONFIG_CTLs	19	8b bitmap	1	MSR configuration controls:	No
				Bit Description	
				0 Indicates that TD configuration should use the IA32_ARCH_CAPABILITIES_CONFIG field below	
				Other Reserved, must be 0	
RESERVED	20	N/A	4	Must be 0	No
EPTP_CONTROLS	24	EPTP	8	Control bits of EPTP – copied to each TD VMCS on TDH.VP.INIT: Bits 2:0 Memory type – must be 110 (WB) Bits 5:3 EPT level – 1 less than the EPT page-walk length. Must be either 3 or 4. Must comply with the EPT page-walk length supported by the CPU. Bits 63:6 Reserved – must be 0	No
CONFIG_FLAGS	32	64b bitmap	8	Non-measured TD-scope execution controls. See 3.4.3 above for details.	No

Field	Offset (Bytes)	Type	Size (Bytes)	Description	Included in TDREPORT?
TSC_FREQUENCY	40	16b unsigned integer	2	TD-scope virtual TSC frequency in units of 25MHz – must be between 4 and 400.	No
RESERVED	42	N/A	38	Must be 0	No
MRCONFIGID	80	SHA384_HASH	48	Software-defined ID for non-owner-defined configuration of the guest TD – e.g., run-time or OS configuration	Yes
MROWNER	128	SHA384_HASH	48	Software-defined ID for the guest TD's owner	Yes
MROWNERCONFIG	176	SHA384_HASH	48	Software-defined ID for owner-defined configuration of the guest TD – e.g., specific to the workload rather than the run-time or OS	Yes
IA32_ARCH_CAPABILITIES_CONFIG	224	64b bitmap	8	Configuration of IA32_ARCH_CAPABILITIES MSR virtualization (if enabled by MSR_CONFIG_CTLs above). Configuration capabilities are enumerated by the IA32_ARCH_CAPABILITIES_CONFIG_MASK, which can be read by TDH.SYS.RD/RDALL.	No
MRCONFIGSVN	232	16b unsigned integer	2	SVN corresponding to MRCONFIGID Support for this field is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22). If not supported, this field must be 0.	Yes
MROWNERCONFIGSVN	234	16b unsigned integer	2	SVN corresponding to MROWNERCONFIG Support for this field is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22). If not supported, this field must be 0.	Yes
RESERVED	236	N/A	20	Must be 0	No
CPUID_CONFIG[0]	256	CPUID_VALUES	16	Direct configuration of CPUID leaves/sub-leaves virtualization: the number and order of entries must be equal to the number and order of directly configurable or allowable CPUID leaves/sub-leaves reported by TDH.SYS.RD/RDALL or TDH.SYS.INFO. Note that the leaf and sub-leaf numbers are implicit. Only bits that have been reported as 1 by TDH.SYS.RD/RDALL or TDH.SYS.INFO may be set to 1.	No
CPUID_CONFIG[n-1]		CPUID_VALUES	16		
RESERVED		N/A		Fills up to TD_PARAMS size (1024B) – must be 0	No

3.4.6. EVENT_FILTER and the EVENT_FILTERS Array

Enumeration: Support of EVENT_FILTER is enumerated by TDX_FEATURES0.EVENT_FILTERING (bit 24) and TDX_FEATURES0.ENHANCED_EVENT_FILTERING (bit 31), readable by TDH.SYS.RD*.

EVENT_FILTER Entry

- 5 EVENT_FILTER specifies a single criterion for filtering values written by the guest TD to the IA32_PERFEVTSELx MSRs.

Table 3.27: EVENT_FILTER Entry

Bits	Name	Description
7:0	EVENT_SELECT	Value for matching the IA32_PERFEVTSEL MSR's EVENT_SELECT field
30:8	RESERVED	Must be 0
31	NEGATIVE	If the TDX Module supports enhanced event filtering, as enumerated by TDX_FEATURES0.ENHANCED_EVENT_FILTERING, then NEGATIVE indicates a negative match. Else NEGATIVE must be 0.
47:32	UMASK	Value for matching the IA32_PERFEVTSEL MSR's UMASK2 and UMASK field, after applying UMASK_MASK (if applicable). If the CPU does not support UMASK2, then the upper 8 bit of UMASK must be 0.
63:48	UMASK_MASK	If the TDX Module supports enhanced event filtering, as enumerated by TDX_FEATURES0.ENHANCED_EVENT_FILTERING, then UMASK_MASK selects which bits of the IA32_PERFEVTSEL MSR's UMASK2 and UMASK fields to compare with UMASK. Else, UMASK_MASK must be 0xFFFF.

EVENT_FILTERS Array

EVENT_FILTERS is an array of EVENT_FILTER entries, provided by the host VMM as an input to TDH.MNG.INIT.

- 10 If the TDX Module supports enhanced event filtering, as enumerated by TDX_FEATURES0.ENHANCED_EVENT_FILTERING, then the array must be sorted in an ascending order by EVENT_SELECT. Else, the array must be sorted in an ascending order by the raw 64-bit value of each entry and must not contain duplicate entries.

The maximum number of entries in the array is enumerated by MAX_EVENT_FILTERS, readable by TDH.SYS.RD*.

3.5. Physical Memory Management Types

- 15 **Note:** This section describes physical memory types, as defined. Implementation may differ.

PAMT entry and PT (page type) are defined in the [TDX Module Base Spec].

3.5.1. PAMT Page Type (PT) Values

Some PT values are applicable only when enumerated by certain TDX_FEATURES bits (see 3.3.3.1). If a certain PT value is not applicable, then it is considered reserved. For a detailed description of the page types, refer to the [Base Spec].

20 **Table 3.28: PAMT Page Type Values**

Page Type	Value	TDX_FEATURES Enumeration	
PT_NDA	0	N/A	The physical page is Not Directly Assigned to the Intel TDX Module.
PT_RSVD	1	N/A	The physical page is reserved for non-TDX usage.
PT_PR	2	ACT (bit 14)	The physical page holds a page that is pending release.

Page Type	Value	TDX_FEATURES Enumeration	
PT_REG	3	N/A	The physical page holds TD private memory.
PT_TDR	4	N/A	The physical page holds the TD Root (TDR) control structure.
PT_TDCX	5	N/A	The physical page holds a TD control structure.
PT_TDVPR	6	N/A	The physical page holds a TD VCPU Root (TDVPR) page.
PT_TR	7	NON_BLOCKING_RESIZE (bit 35)	The physical page that has no current GPA mapping but must be TLB tracked before it can be assigned for any usage.
PT_EPT	8	N/A	The physical page holds a Secure EPT page.
PT_DEVIFCS_R	9	TDX_CONNECT (bit 6)	The physical page holds a DEVIFCS structure
PT_DEVIF_NR	10	TDX_CONNECT (bit 6)	The physical page holds a DEVIFCS internal data
PT_IOMMU_MT	11	TDX_CONNECT (bit 6)	The physical page holds an I/O (IOMMU/IDE/SPDM) data
PT_MMIO_MT	12	TDX_CONNECT (bit 6)	The physical page holds an MMIO metadata table
PT_DEVIFMT	13	TDX_CONNECT (bit 6)	The physical page holds a DEVIF metadata table
RESERVED	14	N/A	Reserved
PT_PAMT	15	DYNAMIC_PAMT (bit 36)	Indicates a PAMT non-leaf entry
PT_EXT_POOL	16	NRX (bit 39)	The physical page belongs to the TDX Module's extended memory pool
PT_NRX_TDR	17	NRX (bit 39)	The physical page holds the TD Root (TDR) control structure of an NRX TD.
PT_NRX_TDVPR	18	NRX (bit 39)	The physical page holds a TD VCPU Root (TDVPR) page of an NRX TD.
RESERVED	Other	N/A	Reserved

3.5.2. Physical Page Size

Three physical page size levels (4KB, 2MB and 1GB) are defined.

Table 3.29: Page Size Definition

Page Size	Associated Physical Page Size	Value
PS_1G	1GB	2
PS_2M	2MB	1
PS_4K	4KB	0

3.5.3. HPA_LIST and HPA_LIST_INFO

The HPA_LIST is a 4KB page which contains a list of HPAs. It is used, e.g., as an input to TDH.EXT.MEM.ADD. The page is 4KB aligned. It contains up to 512 entries.

Table 3.82 below shows the format of an HPA_LIST entry.

Table 3.30: HPA_LIST Entry Definition

Bit(s)	Size	Name	Description
11:0	12	RESERVED	Reserved, must be 0
51:12	40	HPA	Host Physical Address bits 51:12 HKID must be 0
63:52	12	RESERVED	Reserved, must be 0

HPA_LIST_INFO references an HPA_LIST page.

Table 3.31: HPA_LIST_INFO

Bits	Name	Description
2:0	FORMAT	Reserved: must be 0
11:3	FIRST_ENTRY	Index of the first entry of the list to be processed
51:12	HPA	Bits 51:12 of the host physical address (including HKID) of the HPA list page, which must be a shared HPA
54:52	RESERVED	Reserved: must be 0
63:55	LAST_ENTRY	Index of the last entry in the HPA list

5

3.6. TD Private Memory Management Data Types: Secure EPT

Intel SDM, Vol. 3, 28.2.2 EPT Translation Mechanism

Note: This section describes private memory management types, as defined. Implementation may differ.

3.6.1. Secure EPT Levels

- 10 Secure EPT level definition is identical to legacy VMX EPT level definition. As a rule, an EPT entry at level L maps a GPA range whose size is 2^{12+9*L} .

Table 3.32: EPT Levels Definition

Level	0	1	2	3	4	5 (5-Level EPT Only)
GPA Range Size	4KB	2MB	1GB	512GB	256TB	16PB ³
Child Physical Page Size	4KB	2MB	1GB	N/A	N/A	N/A
EPT Page Type	N/A	EPT	EPD	EPDPT	EPML4	EPML5
Parent EPT Entry Type	EPTE	EPDE	EPDPTE	EPML4E	EPML5E (5-level EPT) or VMCS.EPTP (4-level EPT)	VMCS.EPTP
GPA Offset Bits	20:12	29:21	38:30	47:39	51:48 (5-level EPT only)	N/A

3.6.2. Secure EPT Entry Information as Returned by TDX Module Functions

- 15 Many Intel TDX Module functions return Secure EPT entry information. This information is returned in the formats detailed below, which may be different than the actual Secure EPT format as maintained by the TDX Module in memory.

³ Only the lower half is available as TD private GPA space, because the SHARED bit must be 0

Note: The returned Secure EPT information is subject to change with new versions of TDX.

3.6.2.1. Returned L1 Secure EPT Entry Content

The returned L1 secure EPT entry format is detailed below. It may be different that the actual Secure EPT format as maintained by the TDX Module in memory.

Table 3.33: L1 Secure EPT Entry Content as Returned by TDX Interface Functions

L1 Secure EPT Entry Field						Value Returned in RCX (per Class of Entry State Returned in RDX)		
MSB	LSB	Size	Short Name	Full Name	Enabled	Leaf	Non-Leaf	Free ⁴
0	0	1	R	Read	N/A	R	R	0
1	1	1	W	Write	N/A	W	W	0
2	2	1	X / Xs	Execute	N/A	X	X	0
5	3	3	MT	Memory Type	N/A	MT	0	0
6	6	1	IPAT	Ignore PAT	N/A	IPAT	0	0
7	7	1	PS	Leaf	N/A	1	0	0
8	8	1	A	Accessed	No	0	0	0
9	9	1	D	Dirty	No	0	0	0
10	10	1	Xu	Execute (User)	No	0	0	0
11	11	1	Ignored	Ignored	N/A	0	0	0
51	12	40	HPA[51:12]	Host Physical Address [51:12]	N/A	HPA[51:12]	HPA[51:12]	0
57	57	1	VGP	Verify Guest Paging	No	0	0	0
58	58	1	PWA	Paging-Write Access	No	0	0	0
59	59	1	Ignored	Ignored	N/A	0	0	0
60	60	1	SSS	Supervisor Shadow Stack	No	0	0	0
61	61	1	SPP	Check Sub-Page Permissions	No	0	0	0
62	62	1	Ignored	Ignored	N/A	0	0	0
63	63	1	SVE	Suppress #VE	Yes	SVE	0	1

For L1 SEPT entries, the R, W and X access permission bits' values depend on the SEPT entry state:

- For leaf entries in the MAPPED and EXPORTED_DIRTY states, and non-leaf entries in the NL_MAPPED state, RWX = 111.
- For leaf entries in the BLOCKED, PENDING* and REMOVED states, non-leaf entries in the NL_BLOCKED state and FREE entries, RWX = 000.
- For leaf entries in the *BLOCKEDW* states, RWX = 101.

3.6.2.2. Returned L2 Secure EPT Entry Content

The returned L2 secure EPT entry format is detailed below. It may be different than the actual L2 Secure EPT format as maintained by the TDX Module in memory.

⁴ Applies to the SEPT FREE state, as well as the REMOVED and EXPORTED_REMOVED states.

Table 3.34: L2 Secure EPT Entry Content as Returned by TDX Interface Functions

L2 Secure EPT Entry Field						Value Returned in RCX (per Class of Entry State Returned in RDX)		
MSB	LSB	Size	Short Name	Full Name	Enabled	Leaf	Non-Leaf	Free ⁵
0	0	1	R	Read	N/A	R	R	0
1	1	1	W	Write	N/A	W	W	0
2	2	1	Xs	Execute	N/A	Xs	Xs	0
5	3	3	MT	Memory Type	N/A	MT	0	0
6	6	1	IPAT	Ignore PAT	N/A	IPAT	0	0
7	7	1	PS	Leaf	N/A	1	0	0
8	8	1	A	Accessed	No	0	0	0
9	9	1	D	Dirty	No	0	0	0
10	10	1	Xu	Execute (User)	No	Xu	Xu	0
11	11	1	Ignored	Ignored	N/A	0	0	0
51	12	40	HPA[51:12]	Host Physical Address [51:12]	N/A	HPA[51:12]	HPA[51:12]	0
57	57	1	VGP	Verify Guest Paging	No	0 / VGP	0	0
58	58	1	PWA	Paging-Write Access	No	0 / PWA	0	0
59	59	1	Ignored	Ignored	N/A	0	0	0
60	60	1	SSS	Supervisor Shadow Stack	No	0 / SSS	0	0
61	61	1	SPP	Check Sub-Page Permissions	No	0	0	0
62	62	1	Ignored	Ignored	N/A	0	0	0
63	63	1	SVE	Suppress #VE	Yes	SVE	0	1

For L2 SEPT entries, the R, W, Xs and Xu access permission bits' values depend on the L2 SEPT entry state and on the TD's `ATTRIBUTE.DEBUG` value:

- 5 • For leaf entries in the `L2_MAPPED` state:
 - If `ATTRIBUTES.DEBUG` is 0, then `RWXsXu` = 1111 and VGP, PWA and SSS are cleared to 0.
 - Else, the real values of `RWXsXu` and of VGP, PWA and SSS are returned.
- For leaf entries in the `L2_BLOCKED` state:
 - If `ATTRIBUTES.DEBUG` is 0, then `RWXsXu` = 0000 and VGP, PWA and SSS are cleared to 0.
 - Else, then `RWXsXu` = 0000 and GP, PWA and SSS are returned.
- 10 • For non-leaf entries in the `L2_NL_MAPPED` state, `RWXsXu` = 1111.
- For non-leaf entries in the `L2_NL_BLOCKED` state and `L2_FREE` entries, `RWXsXu` = 0000.

3.6.2.3. Additional Returned Secure EPT Information

- 15 Additional information for secure EPT entries is returned as defined below. Some SEPT entry state values are applicable only when enumerated by certain `TDX_FEATURES` bits (see 3.3.3.1). If a certain SEPT entry state value is not applicable, then it is considered reserved.

⁵ Applies to the L2 SEPT `L2_FREE` state.

Table 3.35: Additional Secure EPT Entry Information Returned by TDX Interface Functions

Bits	Name	Description
2:0	Level	Level of the returned Secure EPT entry – see 3.6.1 above
7:3	Reserved	Set to 0
15:8	State	The TDX state of the Secure EPT entry – see Table 3.36 below
17:16	VM	Index of the VM for which the SEPT information is returned
63:18	Reserved	Set to 0

Table 3.36: Secure L1 EPT Entry TDX State Returned by TDX Interface Functions

L1 SEPT Entry State Name	Public State Number	Class: Free, Non-Leaf or Leaf	Description	TDX_FEATURES0 Enumeration
FREE	0	Free	L1 Secure EPT entry does not map a GPA range.	N/A
REMOVED	5	Free	L1 Secure EPT entry is of a removed page	TD_MIGRATION
NL_MAPPED	132	Non-Leaf	L1 Secure EPT entry maps a private GPA range which is accessible by the guest TD.	N/A
NL_BLOCKED	129	Non-Leaf	L1 Secure EPT entry maps a private GPA range, but new address translations to that range are blocked.	N/A
MAPPED	4	Leaf	L1 Secure EPT entry maps a private GPA page which is accessible by the guest TD.	N/A
BLOCKED	1	Leaf	L1 Secure EPT entry maps a private GPA page but new address translations to that range are blocked.	N/A
REMOVE_IN_PROGRESS	6	Free	L1 Secure EPT entry maps a private page that is being removed (TDH.MEM.PAGE.REMOVE has been interrupted).	ACT
BLOCKEDW	8	Leaf	Write-Blocking Export: L1 Secure EPT entry maps a private GPA page, but new address translations for write operations to that range are blocked.	TD_MIGRATION
EXPORTED_BLOCKEDW	9	Leaf	Write-Blocking Export: L1 Secure EPT entry maps a private page that has been blocked for writing and exported.	TD_MIGRATION or S4
EXPORTED_DIRTY	11	Leaf	Write-Blocking Export: L1 Secure EPT entry maps a private page that was exported, but is not blocked for writing and its content and/or attributes may have since been modified.	TD_MIGRATION

L1 SEPT Entry State Name	Public State Number	Class: Free, Non-Leaf or Leaf	Description	TDX_FEATURES0 Enumeration
EXPORTED_DIRTY_BLOCKEDW	12	Leaf	Write-Blocking Export: L1 Secure EPT entry maps a private page that was previously exported, its content and/or attributes may have since been modified and then it was blocked for writing.	TD_MIGRATION
EXPORTED	24	Leaf	Non-Blocking Export: The page has been exported. This state indicates that any change in the page content or attributes would require a re-export.	N/A
EXPORTED_MODIFIED	25	Leaf	Non-Blocking Export: The page was exported and later either identified as dirty based on the Dirty bit (which was cleared by the same operation that checked its value) or some memory management operation changed the page attributes or state. This state indicates that the page must be re-exported as a REMIGRATE operation.	NON_BLOCKING_EXPORT
EXPORTED_BLOCKED	26	Leaf	Non-Blocking Export: The page was exported and later blocked by TDH.MEM.RANEG.BLOCK. This state indicates that the page must be re-exported as a CANCEL operation.	NON_BLOCKING_EXPORT
EXPORTED_REMOVED	27	Free	Non-Blocking Export: The page was exported and later removed by TDH.MEM.PAGE.REMOVE. This state indicates that the page should be re-exported, as a CANCEL operation.	NON_BLOCKING_EXPORT
EXPORTED_REMOVE_IN_PROGRESS	28	Free	Non-Blocking Export: The page was exported and later partially removed by TDH.MEM.PAGE.REMOVE. This state indicates that the page should be re-exported, as a CANCEL operation.	NON_BLOCKING_EXPORT and ACT
PENDING	2	Leaf	L1 Secure EPT entry maps a 4KB or a 2MB page that has been dynamically added to the guest TD using TDH.MEM.PAGE.AUG and is pending acceptance by the guest TD using TDG.MEM.PAGE.ACCEPT. This page is not yet accessible by the guest TD.	N/A
PENDING_BLOCKED	3	Leaf	L1 Secure EPT entry is both pending and blocked.	N/A
PENDING_BLOCKEDW	16	Leaf	Write-Blocking Export: L1 Secure EPT entry is both pending and blocked for writing.	TD_MIGRATION
PENDING_EXPORTED_BLOCKEDW	17	Leaf	Write-Blocking Export: L1 Secure EPT entry is both pending and exported.	TD_MIGRATION or S4

L1 SEPT Entry State Name	Public State Number	Class: Free, Non-Leaf or Leaf	Description	TDX_FEATURES0 Enumeration
PENDING_EXPORTED_DIRTY	19	Leaf	Write-Blocking Export: L1 Secure EPT entry is both pending and exported, and is not blocked for writing.	TD_MIGRATION
PENDING_EXPORTED_DIRTY_BLOCKEDW	20	Leaf	L1 Secure EPT entry is both pending and exported, and is blocked for writing.	TD_MIGRATION
PENDING_EXPORTED	29	Leaf	Non-Blocking Export: The page has been exported. This state indicates that any change in the page attributes would require a re-export.	NON_BLOCKING_EXPORT
PENDING_EXPORTED_MODIFIED	30	Leaf	Non-Blocking Export: The page was exported and later identified as dirty based on the Dirty bit (which was atomically cleared by the same operation that checked its value). This state indicates that the page must be re-exported as a REMIGRATE operation.	NON_BLOCKING_EXPORT
PENDING_EXPORTED_BLOCKED	31	Leaf	Non-Blocking Export: The page was exported and later blocked by TDH.MEM.RANEG.BLOCK. This state indicates that the page must be re-exported as a CANCEL operation.	NON_BLOCKING_EXPORT
MMIO_MAPPED	32	Leaf	L1 Secure EPT entry maps a private MMIO page which is accessible by the guest TD.	TDX_CONNECT
MMIO_BLOCKED	33	Leaf	L1 Secure EPT entry maps a private MMIO page, but new address translations to that page are blocked.	TDX_CONNECT
MMIO_PENDING	34	Leaf	L1 Secure EPT entry maps a 4KB, 2MB or 1GB MMIO page that is pending acceptance by the guest TD using TDG.MMIO.ACCEPT. This page is not yet accessible by the guest TD.	TDX_CONNECT

Table 3.37: Secure L2 EPT Entry TDX State Returned by TDX Interface Functions

L2 SEPT Entry State Name	Public State Number	Class: Free, Leaf or Non-Leaf	Description	TDX_FEATURES Enumeration
L2_FREE	64	Free	L2 Secure EPT entry does not map a GPA range.	TD_PARTITIONING
L2_NL_MAPPED	196	Non-Leaf	L2 Secure EPT entry maps a private GPA range which is accessible by the L2 VM.	TD_PARTITIONING
L2_NL_BLOCKED	193	Non-Leaf	L2 Secure EPT entry maps a private GPA range, but new address translations to that range are blocked.	TD_PARTITIONING
L2_MAPPED	68	Leaf	L2 Secure EPT entry maps a private GPA page which is accessible by the L2 VM.	TD_PARTITIONING

L2 SEPT Entry State Name	Public State Number	Class: Free, Leaf or Non-Leaf	Description	TDX_FEATURES Enumeration
L2_BLOCKED	65	Leaf	L2 Secure EPT entry maps a private GPA page but new address translations to that range are blocked.	TD_PARTITIONING
L2_MMIO_MAPPED	96	Leaf	L2 Secure EPT entry maps a private MMIO page which is accessible by the L2 VM.	TD_PARTITIONING and TDX_CONNECT
L2_MMIO_BLOCKED	97	Leaf	L2 Secure EPT entry maps a private MMIO page, but new address translations to that page are blocked.	TD_PARTITIONING and TDX_CONNECT

3.6.3. GPA_ATTR: GPA Attributes

GPA_ATTR specifies the settable attributes of a page. It is used as an input of TDG.MEM.PAGE.ATTR.WR, as an output of TDG.PAGE.ATTR.WR, and for migration (TDH.EXPORT.MEM and TDH.IMPORT.MEM) and, if the TD is in debug mode, for returning of L2 attributes by TDH.MEM.SEPT.RD.

GPA_ATTR is an array of four GPA_ATTR_SINGLE_VM 16-bit entries:

Table 3.38: GPA_ATTR: GPA Attributes (all VMs) Definition

Bits	VM Index	Bits	Description
15:0	0	15:0	GPA attributes for L1 (all-0 for migration)
31:16	1	31:24	GPA attributes for L2 VM #1
47:32	2	47:32	GPA attributes for L2 VM #2
63:48	3	63:48	GPA attributes for L2 VM #3

Table 3.39: GPA_ATTR_SINGLE_VM: GPA Attributes (Single VM) Definition

Bit(s)	Size	Attribute Type	Name	Description	TDG.MEM.PAGE.ATTR.RD/WR Access			Used for Migration	
					L1	L2 Mem.	L2 MMIO ⁶	L1	L2
0	1	Intel64	R	Read	None	RW	RW	No	Yes
1	1	Intel64	W	Write	None	RW	RW	No	Yes
2	1	Intel64	Xs	Execute (Supervisor)	None	RW	R	No	Yes
3	1	Intel64	Xu	Execute (User)	None	RW	R	No	Yes
4	1	Intel64	VGP	Verify Guest Paging	None	RW	R	No	Yes
5	1	Intel64	PWA	Paging-Write Access	None	RW	R	No	Yes
6	1	Intel64	SSS	Supervisor Shadow Stack	None	RW	R	No	Yes
7	1	Intel64	RESERVED	Reserved	None	None	None	No	No
			SVE	ARCH_VE_SUPPORT: Suppress #VE	None	RW	R	No	Yes
14:8	7	N/A	RESERVED	Must be 0	R	R	R	No	No

⁶ Applicable only if the TDX Module supports TDX Connect

Bit(s)	Size	Attribute Type	Name	Description	TDG.MEM.PAGE. ATTR.RD/WR Access			Used for Migration	
					L1	L2 Mem.	L2 MMIO ⁶	L1	L2
15	1	TDX	VALID	Indicates that the other bits are valid. If its value is 0, other fields are reserved and must be 0.	RW	RW	RW	No	Yes

3.6.3.1. GPA Attributes Rules

The TDX Module enforces the following rules to help ensure that GPA attributes will not cause an EPT Misconfiguration (see [Intel SDM, Vol. 3, 28.3.3.1]):

- If VALID is 0, all other bits must be 0
- Reserved bits must be 0.
- If bit W is 1, bit R must be 1
- If bit PWA is 1, bit R must be 1 (regardless of the VMCS “EPT paging-write control” VM-execution control.

The TDX Module checks, on TDH.SYS.INIT, that the CPU supports setting Xs or Xu when R is 0.

3.6.4. GLA List

GLA lists are used by TDG.VP.INVGLA.

3.6.4.1. GLA_LIST_ENTRY

GLA_LIST_ENTRY species a range of consecutive guest linear addresses, each aligned on 4KB.

Table 3.40: GLA_LIST_ENTRY Definition

Bits	Name	Description
11:0	LAST_GLA_INDEX	Index of the last 4KB-aligned linear address to be processed
63:12	BASE_GLA	Bits 63:12 of the guest linear address of the first 4KB page to be processed

3.6.4.2. GLA_LIST

A GLA_LIST is an array of up to 512 GLA_LIST_ENTRIES.

3.6.4.3. GLA_LIST_INFO: GLA List GPA and Additional Information

GLA_LIST_INFO is a 64b structure used as a GPR input and output operand of TDG.VP.INVGLA. It provides the GPA of the GLA list page in private memory, the index of the first entry and the number of entries to be processed.

Table 3.41: GLA_LIST_INFO

Bits	Name	Description
8:0	FIRST_ENTRY	Index of the first entry of the list to be processed
11:9	RESERVED	Reserved: must be 0
51:12	LIST_GPA	Bits 51:12 of the guest physical address of the GLA list page, which must be a private GPA
61:52	NUM_ENTRIES	Number of entries in the GLA list to be processed; must be between 0 through 512
63:62	RESERVED	Reserved: must be 0

3.7. TD Entry and Exit Types

3.7.1. Extended Exit Qualification

Extended Exit Qualification is a 64-bit field returned by TDH.VP.ENTER for asynchronous TD exits with an architectural VMX exit reasons. It contains additional non-VMX, TDX-specific information.

Table 3.42: Extended Exit Qualification

Bits	Name	Description		
3:0	TYPE	Extended exit qualification type		
		Value	Name	Description
		0	NONE	No extended exit qualification
		1	ACCEPT	Extended exit qualification for an EPT violation during TDG.MEM.PAGE.ACCEPT
		2	GPA_DETAILS	Extended exit qualification for an EPT violation caused by guest-side interface function failure of GPA→HPA translation
		3	TD_ENTRY_MSR_LOAD_FAILURE	Extended exit qualification for failures of TD entry due to loading guest MSR state
		4	TD_ENTRY_XSTATE_LOAD_FAILURE	Extended exit qualification for failures of TD entry due to loading guest extended state
		5	ATTR_WR	Extended exit qualification for an EPT violation during TDG.MEM.PAGE.ATTR.WR
		6	PENDING_EPT_VIOLATION ⁷	Extended exit qualification for an EPT violation due to guest TD access to a PENDING page
		7	RELEASE ⁸	Extended exit qualification for an EPT violation during TDG.MEM.PAGE.RELEASE
		Other	Reserved	
31:4	Reserved	Set to 0		
63:32	INFO	TYPE-specific information		
		TYPE	Value	
		NONE	0	
		ACCEPT	See the table below	
		GPA_DETAILS	See the table below	
		TD_ENTRY_MSR_LOAD_FAILURE	MSR index	
		TD_ENTRY_XSTATE_LOAD_FAILURE	0	
		ATTR_WR	See the table below	
		PENDING_EPT_VIOLATION	0	
		RELEASE	See the table below	
		Reserved	0	

⁷ Availability of this indication is enumerated by TDX_FEATURES0.PENDING_EPT_VIOLATION_V2 (bit 16), readable by TDH.SYS.RD*.

⁸ Availability of this indication is enumerated by TDX_FEATURES0.PAGE_RELEASE (bit 38), readable by TDH.SYS.RD*.

Table 3.43: Extended Exit Qualification INFO Field (Bits 63:32) when TYPE is ACCEPT, ATTR_WR or RELEASE

Bits	Name	Description
34:32	REQ_SEPT_LEVEL	SEPT level requested as an input to TDG.MEM.PAGE.ACCEPT or TDG.MEM.PAGE.ATTR.WR or TDG.MEM.PAGE.RELEASE
37:35	ERR_SEPT_LEVEL	SEPT level in which TDG.MEM.PAGE.ACCEPT or TDG.MEM.PAGE.ATTR.WR or TDG.MEM.PAGE.RELEASE detected an error
45:38	ERR_SEPT_STATE	The TDX state of the Secure EPT entry where TDG.MEM.PAGE.ACCEPT, TDG.MEM.PAGE.ATTR.WR or TDG.MEM.PAGE.RELEASE detected an error – see Table 3.36 above
46	ERR_SEPT_IS_LEAF	Indicates that the SEPT entry where TDG.MEM.PAGE.ACCEPT or TDG.MEM.PAGE.ATTR.WR or TDG.MEM.PAGE.RELEASE detected an error is a leaf entry
63:47	Reserved	Set to 0

Table 3.44: Extended Exit Qualification INFO Field (Bits 63:32) when TYPE is GPA_DETAILS

Bits	Name	Description
34:32	Reserved	Set to 0
37:35	ERR_SEPT_LEVEL	Level where the Secure EPT walk error occurred
51:38	Reserved	Set to 0
53:52	VM_INDEX	Virtual machine index for which Secure EPT walk error occurred
63:54	Reserved	Set to 0

3.8. L2 VM Transition Types

3.8.1. L2_ENTER_GUEST_STATE

L2_ENTER_GUEST_STATE is used as input and output of TDG.VP.ENTER. It is an array of general-purpose (GPR) register values, organized according to their architectural number, with additional values of RFLAG, RIP and SSP.

Table 3.45: L2_ENTER_GUEST_STATE Definition

Offset (Bytes)	Size (Bytes)	Name	Description
0	8	RAX	
8	8	RCX	
16	8	RDX	
24	8	RBX	
32	8	RSP	
40	8	RBP	
48	8	RSI	
56	8	RDI	
64	8	R8	
72	8	R9	

Offset (Bytes)	Size (Bytes)	Name	Description
80	8	R10	
88	8	R11	
96	8	R12	
104	8	R13	
112	8	R14	
120	8	R15	
128	8	RFLAGS	
136	8	RIP	
144	8	SSP	
152	2	GUEST_INTERRUPT_STATUS	Bits 7:0: RVI Bits 15:7: SVI

3.9. Measurement and Attestation Types

Note: This section describes measurement and attestation types, as defined. Implementation may differ.

3.9.1. CPUSVN

5 CPUSVN is a 16B Security Version Number of the CPU.

- There is a single CPUSVN used for SGX and TDX.
- CPUSVN contents are considered micro-architectural. CPUSVN is composed of fields for PR_RESET_SVN, R_LAST_PATCH_SVN, SINIT, ACTM, Boot Guard ACM, BIOS Guard module and SEAMLDR.

3.9.2. TDREPORT_STRUCT

10 TDREPORT_STRUCT is the output of the TDG.MR.REPORT function. TDREPORT_STRUCT is composed of a generic MAC structure (REPORTMACSTRUCT, see 3.9.5 below), a TEE_TCB_INFO structure and a TDX-specific TEE info structure (TDINFO_STRUCT, see 3.9.7 below).

The overall size of TDREPORT_STRUCT depends on its version, as specified in REPORTMACSTRUCT.REPORTTYPE.VERSION:

- For REPORTTYPE.VERSION values of 0 and 1, TDREPORT_STRUCT's size is 1024 bytes.
- 15 • For REPORTTYPE.VERSION value of 2 (if supported), TDREPORT_STRUCT's size is 1280 bytes.

TD software calling TDG.MR.REPORT should be prepared for a report of up to MAX_TDREPORT_SIZE, as enumerated by TDG.SYS.RD.

Table 3.46: TDREPORT_STRUCT Definition

Name	Offset (Bytes)	Type	Size (Bytes)	Description
REPORTMACSTRUCT	0	REPORTMACSTRUCT	256	REPORTMACSTRUCT for the TDG.MR.REPORT
TEE_TCB_INFO	256	TEE_TCB_INFO	239	Additional attestable elements in the TD's TCB are not reflected in the REPORTMACSTRUCT.CPUSVN – includes the Intel TDX Module measurements.
RESERVED	495	N/A	17	Reserved – contains 0

Name	Offset (Bytes)	Type	Size (Bytes)	Description
TDINFO	512	TDINFO_STRUCT	See 3.9.7	Structure containing the TD's attestable properties. - The hash of this structure is found in REPORTMACSTRUCT.TEE_INFO_HASH. - Size is determined by REPORTMACSTRUCT.REPORTTYPE.VERSION. See 3.9.7 for details.

3.9.3. TEE_TCB_INFO (Reference)

TEE_TCB_INFO is defined in the [TDX Arch Extensions Spec]. The definition below is provided for reference. Some details which are not applicable for TDX have been eliminated.

- 5 The size of TEE_TCB_INFO is 239 bytes.

Table 3.47: TEE_TCB_INFO Definition

Name	Offset (Bytes)	Size (Bytes)	Description
VALID	0	8	Indicates which TEE_TCB_INFO fields are valid. 1 in the i^{th} significant bit reflects that the 8 bytes starting at offset $(8 * i)$ are valid 0 in the i^{th} significant bit reflects that either 8 bytes starting at offset $(8 * i)$ is not populated or reserved and is set to zero. Set to 0x301FF.
TEE_TCB_SVN	8	16	TEE_TCB_SVN of the TDX Module that created the TD on the current platform. TD Migration: For a TD which has been migrated, this is the TEE_TCB_SVN of the TDX Module on the destination platform, at the time of destination TD creation (TDH.MNG.CREATE), before import.
MRSEAM	24	48	The measurement of the TDX Module that created the TD on the current platform. TD Migration: For a TD which has been migrated, this is the measurement of the TDX Module on the destination platform, at the time of destination TD creation (TDH.MNG.CREATE), before import.
MRSIGNERSEAM	72	48	Set to all 0's.
ATTRIBUTES	120	8	Set to all 0's.
TEE_TCB_SVN2	128	16	TEE_TCB_SVN of the current TDX Module on the current platform. TD Migration: For a TD which has been migrated, this is the measurement of the current TDX Module on the destination platform, at the time TDREPORT_STRUCT is generated by TDG.MR.REPORT. Note: TEE_TCB_SVN2 may be different than TEE_TCB_SVN, due to TD-preserving TDX Module updates.
RESERVED	144	95	Set to all 0's.

3.9.4. TEE_TCB_SVN (Reference)

TEE_TCB_SVN is defined in the [TDX Arch Extensions Spec]. The definition below is provided for reference.

Name	Offset (Bytes)	Size (Bytes)	Description
TDX_MODULE_SVN_MINOR	0	1	TDX Module minor SVN
TDX_MODULE_SVN_MAJOR	1	1	TDX Module major SVN
SEAM_LAST_PATCH_SVN	2	1	Microcode SE_SVN at the time the TDX Module was loaded
RESERVED	3	13	Must be Zero

3.9.5. REPORTMACSTRUCT (Reference)

Note: REPORTMACSTRUCT is defined in the [TDX Arch Extensions Spec]; the definition below is provided for reference.

REPORTMACSTRUCT is the first field in the TEE report structure. It is common to Intel's Trusted Execution Environments (TEEs) – e.g., SGX and TDX. In the TDX architecture, that is TDREPORT_STRUCT. REPORTMACSTRUCT is MAC-protected and contains hashes of the remainder of the report structure which includes the TEE's measurements, and where applicable, the measurements of additional TCB elements not reflected in REPORTMACSTRUCT.CPUSVN – e.g., a SEAM's measurements.

Software verifying a TEE report structure (for TDX, this includes TEE_TCB_INFO and TDINFO_STRUCT) should check the following:

1. Check that REPORTMACSTRUCT.TEE_INFO_HASH equals SHA384(TDINFO_STRUCT).
2. If REPORTMACSTRUCT.TEE_TCB_INFO_HASH is not 0, check that REPORTMACSTRUCT.TEE_TCB_INFO_HASH equals SHA384(TEE_TCB_INFO).

If all checks pass, the measurements in the structure describe a TEE on this platform.

The size of REPORTMACSTRUCT is 256B.

Table 3.48: REPORTMACSTRUCT Definition

Name	Offset (Bytes)	Type	Size (Bytes)	Description	MAC
REPORTTYPE	0	REPORTTYPE	4	Type Header Structure	Yes
RESERVED	4		12	Must be zero	Yes
CPUSVN	16	CPUSVN	16	CPU SVN	Yes
TEE_TCB_INFO_HASH	32	SHA384_HASH	48	For TDX, SHA384 of TEE_TCB_INFO	Yes
TEE_INFO_HASH	80	SHA384_HASH	48	SHA384 of TEE_INFO: a TEE-specific info structure (TDINFO_STRUCT or SGXINFO) or 0 if no TEE is represented	Yes
REPORTDATA	128		64	A set of data used for communication between the caller and the target.	Yes
RESERVED	192		32	Must be zero	Yes
MAC	224		32	The MAC over the REPORTMACSTRUCT with model-specific MAC	No

3.9.6. REPORTTYPE (Reference)

Note: REPORTTYPE is defined in the [TDX Arch Extensions Spec]; the definition below is provided for reference.

REPORTTYPE indicates the reported Trusted Execution Environment (TEE) type, sub-type and version.

The size of REPORTTYPE is 4B.

Table 3.49: TDX-Specific REPORTTYPE Definition

Name	Offset (Bytes)	Size (Bytes)	Description	Value
TYPE	0	1	Trusted Execution Environment (TEE) Type	0x00: SGX 0x7F-0x01: Reserved (TEE implemented by CPU) 0x80: Reserved (TEE implemented by a SEAM module) 0x81: TDX 0xFF-0x82: Reserved (TEE implemented by a SEAM module)
SUBTYPE	1	1	TYPE-specific subtype	0: Standard TDX report Other: Reserved
VERSION	2	1	TYPE-specific version.	For TDX, VERSION may have the following values: 0: There are no bound nor pre-bound service TDs. TDINFO_STRUCT.SERVTD_HASH is not used (its value is 0). 1: TDINFO_STRUCT.SERVTD_HASH is used. 2: The TD has been assigned with an MRSIGNER and SVNs. ⁹
RESERVED	3	1	Must be zero	0

3.9.7. TDINFO_STRUCT

TDINFO_STRUCT is defined as the TDX-specific TEE_INFO part of TDG.MR.REPORT. It contains the measurements and initial configuration of the TD that was locked at initialization and a set of measurement registers that are run-time extendable. These values are copied from the TDCS by the TDG.MR.REPORT function. Refer to the [TDX Module Base Spec] for additional details.

TDINFO_STRUCT is composed of a base set of fields and an extension. The content of the extension and the overall size of TDINFO_STRUCT depend on the report version, as specified in REPORTMACSTRUCT.REPORTTYPE.VERSION:

- For REPORTTYPE.VERSION equal or lower than 1, TDREPORT_STRUCT's size is 512 bytes.
- For REPORTTYPE.VERSION equal of higher than 2, TDREPORT_STRUCT's size is 768 bytes.

Table 3.50: Overall TDINFO_STRUCT Definition

Name	Offset (Bytes)	Size (Bytes)	Description
TDINFO_BASE	0	512	Base TDINFO fields
TDINFO_EXTENSION	512	0 or 320	The extension field is applicable for REPORTMACSTRUCT.REPORTTYPE.VERSION values of 2 or higher.

⁹ Version 2 is supported if MRCONFIGSVN and MROWNERCONFIGSVN are supported, or if TDG.MR.ASSIGNSVNS is supported.

3.9.7.1. **TDINFO_BASE**

Table 3.51: TDINFO_BASE Definition

Name	Offset (Bytes)	Type	Size (Bytes)	Description
ATTRIBUTES	0		8	TD's ATTRIBUTES
XFAM	8		8	TD's XFAM
MRTD	16	SHA384_HASH	48	Measurement of the initial contents of the TD
MRCONFIGID	64	SHA384_HASH	48	Software-defined ID for non-owner-defined configuration of the guest TD – e.g., run-time or OS configuration
MROWNER	112	SHA384_HASH	48	Software-defined ID for the guest TD's owner
MROWNERCONFIG	160	SHA384_HASH	48	Software-defined ID for owner-defined configuration of the guest TD – e.g., specific to the workload rather than the run-time or OS
RTMR	208	SHA384_HASH	4 * 48	Array of 4 run-time extendable measurement registers
SERVTD_HASH	400	SHA384_HASH	48	If there is one or more bound or pre-bound service TDs, SERVTD_HASH is the SHA384 hash of the TDINFO_STRUCTs of those service TDs bound. Else, SERVTD_HASH is 0.
TDID256	448	Unsigned Integer	32	If report version is 3 or higher, this field contains the 256-bit TD instance universally unique ID. Else, this field is set to 0.
RESERVED	480		24	Set to 0
VMID	504	Unsigned Integer	1	If report version is 3 or higher, this field identifies the L1 or L2 VM that requested this report. Else, this field is set to 0.
RESERVED	505		3	Set to 0
VALID	508	Bitmap	4	If the report version is lower than 3, this field is set to 0.
				Else (the report version is 3 or higher), this field serves as a bitmap indicating which members of the TDINFO structure have been populated.
				Bit(s) TDINFO_STRUCT Fields
				0 SERVTD_HASH
				7:1 Reserved for critical fields, set to 0
				8 TDID256
				9 VMID
				31:10 Reserved for non-critical fields, set to 0

3.9.7.2. TDINFO_EXTENSION for REPORTTYPE.VERSION 2 or Higher**Table 3.52: TDINFO_EXTENSION for REPORTTYPE.VERSION 2 Definition**

Name	Offset (Bytes)	Offset from Start of TDINFO_STRUCT (Bytes)	Type	Size (Bytes)	Description
MRSIGROOT	0	448	SHA384_HASH	48	Signer Roots of MRSIGNER
MRSIGNER	48	496	SHA384_HASH	48	Signer of TD's TDSIGSTRUCT
PRODID	96	544	128-bit integer	16	Product ID
ISVSVN	112	560	16-bit unsigned integer	2	SVNs of the TD
MRCONFIGSVN	114	562		2	SVN of MRCONFIG
MROWNERCONFIGSVN	116	564		2	SVN of MROWNERCONFIG
RESERVED	118	566	N/A	202	Must be zero

3.9.8. TDSIGSTRUCT: TD Signature Structure

- 5 TDSIGSTRUCT contains information about the TD from the TDSIGSTRUCT signer. It can be evaluated at any time, allowing it to leverage RTMRs which initially are empty, and is populated during the boot process, eventually reaching the steady state value that will be assigned an SVN.
- TDSIGSTRUCT.POLICY indicates which of the measurement reference values in the TD are populated and should be compared against the current measurement of the TD.
- 10 TDSIGSTRUCT includes reference measurements as SHA384 digests, as defined in [FIPS PUB 180-4]. The digests are byte strings of length 48. Each of 6 64-bit words of the SHA384 hash is stored as big-endian, i.e., with its most significant byte at the lowest memory address.
- SIGSTRUCT includes two 3072-bit integers (MODULUS, SIGNATURE). Each such integer is represented in a small-endian format, i.e., a byte string of length 384, with the least significant byte at the lowest memory address.
- 15 The 3072-bit integer SIGNATURE should be an RSA signature, where:
- The RSA modulus (MODULUS) is a 3072-bit integer
 - The public exponent is set to $2^{16}+1$
 - The signing procedure uses the EMSA-PKCS1-v1.5 format with DER encoding of the "DigestInfo" value, as specified in of PKCS#1 v2.1/RFC 3447.
- 20 SIGSTRUCT must be 4KB aligned.

In the table below, the "Signed" column indicates that this field should be included in the signature generated by the TD author.

Table 3.53: TDSIGSTRUCT: TD Signature Structure

Name	Offset (bytes)	Size (bytes)	Description	Signed
HEADERTYPE	0	4	Module type (Must be 6)	Y
HEADERLEN	4	4	Header length including crypto fields (dwords) (Must be 0x00E1)	Y
HEADERVERSION	8	4	Structure Version (Must be 0x00010000)	
TYPE	12	4	bit 31: Available to SW bits 30-0: Must be zero	Y

Name	Offset (bytes)	Size (bytes)	Description	Signed
MODVENDOR	16	4	Module Vendor: - Intel: 8086h - ISV: 0000h	Y
DATE	20	4	Build date format is yyyyymmdd in decimal: yyyy=4-digit year, mm=1-12, dd=1-31	Y
SIZE	24	4	Size of the entire module (dwords) (Must be 0x0540)	Y
KEYSIZE	28	4	RSA public key modulus size (dwords) (Must be 0x0060)	Y
MODULUSSIZE	32	4	RSA public key modulus size (dwords) (Must be 0x0060)	Y
EXPONENTSIZE	36	4	RSA public key exponent size (dword) (Must be 0x0001)	Y
RESERVED	40	88	Reserved. Must be 0	Y
MODULUS	128	384	Module Public Key (keylength=3072 bits)	N
EXPONENT	512	4	RSA Exponent = $2^{16}+1$	N
SIGNATURE	516	384	Signature over Header and Body	N
POLICY	900	2	Bits indicate which measurements should be compared against the respective reference values. Bit 0: SIGSTRUCTTYPE (MRSIGNER) 0: Leaf SIGSTRUCT 1: Chain SIGSTRUCT Bit 1: MRTD Bit 2: RTMR0 Bit 3: RTMR1 Bit 4: RTMR2 Bit 5: RTMR3 Bits 15:6: Must be Zero	Y
ISVSVN	902	2	SVN assigned to this TD	Y
PRODID	904	16	Product ID for this TD	Y
RESERVED	920	8	Must be 0	Y
MRTDREF	928	8	Reference value for MRTD	Y
RTMRREF	976	48*4	Array of 4 reference values for RTMRs	Y
MRSIGNER	1168	48	MRSIGNER for this TD	Y
RESERVED	1216	64	Must be 0	Y

3.9.9. TDKEYREQUEST

TDKEYREQUEST is used as an input to TDG.MR.KEY.GET.

TDKEYREQUEST's size is 128 bytes.

Table 3.54: TDKEYREQUEST

Name	Offset (Bytes)	Type	Size (Bytes)	Description
KEYNAME	0	Key Name	2	Identifies the key being requested 0: Seal Key Other: Reserved
SWKEYNAME	2	SW Key Name	1	TD SW assigned key name/identifier
KEYSIZE_BITMAP	3	Bitmap	1	A set of requested key sizes: Bit 0: 128 bits Bit 1: 256 bits Bits 7:2: Ignored Multiple bits may be set. The TDX Module creates a key using the largest requested key size that is supported by the TDX Module and the platform.
RESERVED	4	RESERVED	4	Reserved, must be 0
KEYPOLICY	8	TDKEYPOLICY	8	See below
ATTRIBUTES_MASK	16	MASK	8	
XFAM_MASK	24	MASK	8	
CPUSVN	32	CPUSVN	16	
TEE_TCB_SVN	48	TEE_TCB_SVN	16	
ISVSVN	64	SVN	2	
MRCONFIGSVN	66	SVN	2	
MROWNERCONFIGSVN	68	SVN	2	
SALT	70	Random Data	32	Random data from the user
RESERVED	102	RESERVED	26	Reserved, must be 0

Table 3.55: TDKEYPOLICY

Name	Bit(s)	Size (Bits)	Description
MRTD	0	1	Include MRTD
MROWNER	1	1	Include MROWNER
MRCONFIGID	2	1	Include MRCONFIGID & CONFIGIDSVN
MROWNERCONFIG	3	1	Include MROWNERCONFIG & OWNERCONFIGSVN
RESERVED	7:4	4	Reserved, must be 0
MRSIGROOT	8	1	Include MRSIGROOT
MRSIGNER	9	1	Include MRSIGNER
MRPRODID	10	1	Include ISVPRODID & ISVSVN
RESERVED	31:11	21	Reserved for up to 7 more layers, must be 0
RTMR	47:32	16	4:0: Include RTMR n 7:5: Reserved, must be 0
RESERVED	63:48	16	Reserved, must be 0

3.10. Metadata Access Types

Note: This section describes control structure field access types, as defined. Implementation may differ.

Metadata access is described in the [TDX Module Base Spec].

3.10.1. MD_FIELD_ID: Metadata Field Identifier / Sequence Header

MD_FIELD_ID is used for two purposes:

Metadata Field Identifier: Used for specifying a single element of a metadata field

Metadata Sequence Header: Used as the header of a metadata field sequence

Lists of metadata field identifiers for global-scope metadata, TD-scope metadata and VCPU-scope metadata are provided in Ch. 4. The metadata tables provide a **base identifier**. The table below specifies which components of MD_FIELD_ID are taken from the base identifier; other components need to be specified as required.

Table 3.56: MD_FIELD_ID (Metadata Field Identifier / Sequence Header) Definition

Bits	Size	Name	From Metadata Tables' Base Field ID	Single-Element or Sequence Header	Description
23:0	24	FIELD_CODE	Yes	Both	For a single-element identifier, identifies the element that is being accessed. For a metadata sequence header, identifies the first field that is being accessed in a sequence.
31:24	8	RESERVED	No	Both	Must be 0
33:32	2	ELEMENT_SIZE_CODE	Yes	Both	Size of a single element of a metadata field: 0: 8 bits 1: 16 bits 2: 32 bits 3: 64 bits All metadata read and write interface functions (e.g., TDH.MNG.RD, TDH.MNG.WR, TDH.VP.RD, TDG.SYS.RDALL etc.) ignore this field when used as an input; they use an implicit value.
37:34	4	LAST_ELEMENT_IN_FIELD	No	Sequence Header	Number of elements in a metadata field, minus 1 For a single-element identifier, the value is 0. This field is ignored when used as input to TD*.SYS.RDALL.
46:38	9	LAST_FIELD_IN_SEQUENCE	No	Sequence Header	Number of fields in a sequence, minus 1 For a single-element identifier, the value is 0. This field is ignored when used as input to TD*.SYS.RDALL.
49:47	3	RESERVED	Yes	Both	Must be 0
50	1	INC_SIZE	Yes	Sequence Header	For a single-element identifier, INC_SIZE is ignored. For a sequence header, INC_SIZE specifies how FIELD_CODE is incremented when accessing consecutive elements in a sequence: 0: Increment FIELD_CODE by 1 for each element. 1: Increment FIELD_CODE by 2 for each element. INC_SIZE is designed to support VMCS field encoding, where bit 0 (access type) is always 0 for full access.

Bits	Size	Name	From Metadata Tables' Base Field ID	Single-Element or Sequence Header	Description
51	1	WRITE_MASK_VALID	No	Both	Indicates that a write mask is provided together with the write value. For backward compatibility, single-element metadata write interface functions (e.g., TDH.MNG.WR, TDH.VP.WR etc.) and use an implicit value of 1. This field is ignored by metadata read interface functions.
54:52	3	CONTEXT_CODE	Yes	Both	Specifies the context of the field: 0: Platform (whole Intel TDX Module) 1: TD 2: TD VCPU Other: Reserved All metadata read and write interface functions (e.g., TDH.MNG.RD, TDH.MNG.WR, TDH.VP.RD, TDG.SYS.RDALL etc.) ignore this field when used as an input; they use an implicit value.
55	1	RESERVED	Yes	Both	Must be 0
61:56	6	CLASS_CODE	Yes	Both	Identifies the class of the fields being accessed Class codes are defined in 3.10.3.
62	1	RESERVED	Yes	Both	Must be 0
63	1	IGNORED	Yes	Both	This bit is ignored by the TDX Module and should be ignored by any software that parses the field ID. Note: Previously, this bit was defined as NON_ARCH.

Values Reserved for Software Use

Bits 63:52 value of all-1 will never be used by the TDX Module. This range is reserved for use by host VMM and guest TD software.

5 3.10.2. Meaning of Field Codes

For some field classes, field codes have an architectural meaning, as shown below. For other classes, field codes are arbitrarily assigned.

Table 3.57: Meaning of Field Codes

Field Class	Field Code Meaning			Reference
VMCS	Field code is the architectural VMCS field code. The “HIGH” access type (for accessing the upper 32b of 64b fields) is not supported.			[Intel SDM, Vol. 3, 24.11.2 and App. B]
	Bits	Name	Description	
	23:16	RESERVED	Must be 0	
	15:0	VMCS_FIELD_CODE	Bits 15:0 of the architectural VMCS field code Note: Bits 32:16 of the VMCS field code are implicitly 0.	
MSR Bitmap	Offset (in 8B units) from the beginning of the architectural MSR bitmaps page			[Intel SDM, Vol. 3, 24.6.9]

Field Class	Field Code Meaning	Reference
Secure EPT Root	Offset (in 8B units) from the beginning of the page	
Virtual APIC Page	Offset (in 8B units) from the beginning of the architectural virtual APIC page structure	[Intel SDM, Vol. 3, 29.1]
CPUID Config	Each field contains two 64-bit elements, with the values returned by CPUID for the leaf and sub-leaf, as follows: Element 0[31:0]: EAX Element 0[63:32]: EBX Element 1[31:0]: ECX Element 1[63:32]: EDX The field code is packed as shown below:	
	Bits	Name
	23:17	RESERVED
	16	LEAF_31
	15:9	LEAF_6_0
	8	SUBLEAF_NA
	7:1	SUBLEAF_6_0
	0	ELEMENT_I
GPR State	Architectural GPR number	
MSR State	Architectural MSR index, packed as shown below:	
	Bits	Description
	23:14	Reserved, must be 0
	13	Bit 31 (equal to bit 30) of the architectural MSR index
	12:0	Bits 12:0 of the architectural MSR index
Extended State	Offset (in 8B units) from the beginning of the page extended state buffer	
Other	Arbitrary field identifiers	

3.10.3. Class Codes

3.10.3.1. TDX Module Global Scope Field Class Codes

TDX Module global scope field classes are defined as follows:

Table 3.58: TDX Module Global Scope Field Class Codes Definition

Class Code	Field Class Name
0	Platform Info
8	TDX Module Version
9	TDX Module Handoff
10	TDX Module Info

Class Code	Field Class Name
16	CMR Info
17	TDMR Info
24	TD Control Structures
25	TD Configurability
26	Memory Management
27	Measurement
32	Migration
33	Service TD
34	TD Partitioning
48	TDX Connect

3.10.3.2. TD-Scope (TDR and TDCS) Field Class Codes

TD-scope field classes are defined as follows:

Table 3.59: TD Scope (TDR and TDCS) Field Class Codes Definition

Class Code	Control Structure	Field Class Name
0	TDR	TD Management
1	TDR	Key Management
2	TDR	TD Preserving
3	TDR	TDX I/O
16	TDCS	TD Management
17	TDCS	Execution Controls
18	TDCS	TLB Epoch Tracking
19	TDCS	Measurement
20	TDCS	CPUID
21	TDCS	Zero Page
22	TDCS	Virt. MSR Values
24	TDCS	Migration
25	TDCS	Service TD
26	TDCS	MIGSC Links
27	TDCS	TDX I/O
32	TDCS	MSR Bitmaps
33	TDCS	Secure EPT Root
37	TDCS	L2 Secure EPT Root [1]
41	TDCS	L2 Secure EPT Root [2]
45	TDCS	L2 Secure EPT Root [3]

3.10.3.3. VCPU-Scope (TDVPS) Field Class Codes

TDVPS field classes are defined as follows:

Table 3.60: TD VCPU Scope (TDVPS) Field Class Codes Definition

Class Code	Field Class Name
0	TD VMCS
1	VAPIC
2	VE_INFO
16	Guest GPR State
17	Guest State
18	Guest Ext. State
19	Guest MSR State
32	Management
33	CPUID Control
34	EPT Violation Log
36	VMCS[1]
37	MSR Bitmaps[1]
38	MSR Bitmaps Shadow[1]
44	VMCS[2]
45	MSR Bitmaps[2]
46	MSR Bitmaps Shadow[2]
52	VMCS[3]

3.10.4. Order of Field Identifiers

For usages such as TD migration, there is a need to define strict ordering between field identifiers. For this purpose, we consider field identifiers to be ordered by the following fields:

1. CONTEXT_CODE
2. CLASS_CODE
3. FIELD_CODE

3.10.5. MD_LIST_HEADER: Metadata List Header

MD_LIST_HEADER is defined below. The size of MD_LIST_HEADER is 64 bits.

Table 3.61: MD_LIST_HEADER Definition

Bits	Name	Description
15:0	LIST_BUFF_SIZE	The size of memory buffer containing the list The buffer may be larger than the actual space occupied by the list; in this case the excess buffer space is ignored or read and may be overwritten on write.
31:16	NUM_SEQUENCES	The number of metadata field sequences in the list.
63:32	RESERVED	Reserved, set to 0

3.11. Memory Buffer Types

3.11.1. Private Page List

A private page list specifies a list of HPAs of 4KB pages that are, or will become, TD private pages. The list may have up to 512 64-bit entries, each containing a 4KB-aligned HPA (HKID bits must be 0) of a page. The list is contained in a single 4KB page and must be aligned on 4KB. The page list may contain null entries, indicated by the INVALID bit.

Table 3.62: Private Page List Entry as Used by TDH.IMPORT.MEM

Bits	Name	Description
11:0	RESERVED	Reserved: must be 0 (unless bit 63 indicates an invalid entry)
51:12	HPA	Bits 51:12 of the host physical address (HKID bits must be 0) of the migration buffer page
60:52	RESERVED	Reserved: must be 0 (unless bit 63 indicates an invalid entry)
61	REMOVED	If INVALID (bit 63) is 0: - On input, must be 0. - On output, this bit indicates that the HPA is of a page removed by a CANCEL import operation.
62	PAMT_REMOVAL_HINT	If INVALID (bit 63) is 0: - On input, must be 0. - On output, if REMOVED (bit 61) is 1 and the TDX Module is configured for Dynamic PAMT, provides a hint that the PAMT pages mapping the removed page are empty and can be removed.
63	INVALID	A value of 1 indicates that this entry is invalid

3.11.2. HPA_AND_SIZE: HPA and Size of a Buffer

HPA_AND_SIZE is a 64-bit structure used to provide a buffer host physical address and size details.

Table 3.63: HPA_AND_SIZE

Bits	Name	Description
51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) of the buffer
63:52	SIZE	Size of the buffer, in bytes

3.11.3. HPA_AND_LAST: HPA and Last Byte Index of a Page-Aligned Buffer

HPA_AND_LAST is a 64-bit structure used to provide a 4KB aligned buffer host physical address and size details.

Table 3.64: HPA_AND_LAST

Bits	Name	Description
11:0	LAST	Index of the last byte in the buffer
51:12	HPA	Bits 51:12 of the host physical address (including HKID bits) of the 4KB-aligned buffer
63:52	RESERVED	Reserved: must be 0

3.12. Service TD Types

3.12.1. SERVTD_BINDING_TABLE: Service TD Binding Table

SERVTD_BINDING_TABLE is a table of service TD binding information, held in the TDCS. For details, see the [TDX Module Base Spec].

Table 3.65: Service TD Binding Entry Definition

Field	Type	Offset (Bytes)	Size (Bytes)	Description
STATE	SERVTD_BINDING_STATE	0	1	See below and [TDX Module Base Spec]
Reserved		1	1	Must be 0
TYPE	SERVTD_TYPE	2	2	See below and [TDX Module Base Spec]
Reserved		4	4	Must be 0
ATTR	SERVTD_ATTR	8	8	See below and [TDX Module Base Spec]
UUID	256-bit blob	16	32	See [TDX Module Base Spec]
INFO_HASH	SHA384_HASH	48	48	See [TDX Module Base Spec]
Reserved		96	32	Must be 0

TD-Preserving Update TDX Module Handoff Compatibility

SERVTD_BINDING_TABLE is preserved in memory across TD-preserving updates. The table below specifies the MODULE_HV versions for which the above MIGSC definition is applicable.

Table 3.66: SERVTD_BINDING_TABLE Compatibility with TD Preserving Updates

Module Handoff Version	Value
Minimum MODULE_HV	0
Maximum MODULE_HV	0

3.12.2. SERVTD_BINDING_STATE: Service TD Binding State

SERVTD_BINDING_STATE indicates the state of the service TD binding slot. For details, see the [TDX Module Base Spec].

Table 3.67: SERVTD_BINDING_STATE Values

Value	Name
0	NOT_BOUND
1	PRE_BOUND
2	BOUND
3	REBIND_BOUND

3.12.3. SERVTD_TYPE: Service TD Binding Type

SERVTD_TYPE is a 16-bit field which specifies the binding type of a service TD. For details, see the [TDX Module Base Spec].

Table 3.68: SERVTD_TYPE Definition

Value	Meaning	Multiple Bindings	Metadata Access
0	Migration TD	No	Migration session key
Other	Reserved	N/A	N/A

3.12.4. SERVTD_ATTR: Service TD Binding Attributes

SERVTD_ATTR is a 64-bit field which specifies the binding attributes of a service TD. For details, see the [TDX Module Base Spec].

Table 3.69: SERVTD_ATTR Definition

Bit(s)	Name	Description
31:0	RESERVED	Must be 0
32	IGNORE_ATTRIBUTES	If set to 1, a value of 0 is used instead of the service TD's ATTRIBUTES field when calculating SERVTD_INFO_HASH
33	IGNORE_XFAM	If set to 1, a value of 0 is used instead of the service TD's XFAM field when calculating SERVTD_INFO_HASH
34	IGNORE_MRTD	If set to 1, a value of 0 is used instead of the service TD's MRTD field when calculating SERVTD_INFO_HASH
35	IGNORE_MRCONFIGID	If set to 1, a value of 0 is used instead of the service TD's MRCONFIGID field when calculating SERVTD_INFO_HASH
36	IGNORE_MROWNER	If set to 1, a value of 0 is used instead of the service TD's MROWNER field when calculating SERVTD_INFO_HASH
37	IGNORE_MROWNERCONFIG	If set to 1, a value of 0 is used instead of the service TD's MROWNERCONFIG field when calculating SERVTD_INFO_HASH
38	IGNORE_RTMR0	If set to 1, a value of 0 is used instead of the service TD's RTMR0 field when calculating SERVTD_INFO_HASH
39	IGNORE_RTMR1	If set to 1, a value of 0 is used instead of the service TD's RTMR1 field when calculating SERVTD_INFO_HASH
40	IGNORE_RTMR2	If set to 1, a value of 0 is used instead of the service TD's RTMR2 field when calculating SERVTD_INFO_HASH
41	IGNORE_RTMR3	If set to 1, a value of 0 is used instead of the service TD's RTMR3 field when calculating SERVTD_INFO_HASH
42	IGNORE_SERVTD_HASH	If set to 1, a value of 0 is used instead of the service TD's SERVTD_HASH field when calculating SERVTD_INFO_HASH
43	IGNORE_MRSIGROOT	If set to 1, a value of 0 is used instead of the service TD's MRSIGROOT field when calculating SERVTD_INFO_HASH Enumeration: Support of this bit is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22). If not supported, it must be 0.
44	IGNORE_MRSIGNER	If set to 1, a value of 0 is used instead of the service TD's MRSIGNER field when calculating SERVTD_INFO_HASH Enumeration: Support of this bit is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22). If not supported, it must be 0.

Bit(s)	Name	Description
45	IGNORE_PRODID	If set to 1, a value of 0 is used instead of the service TD's PRODIG field when calculating SERVTD_INFO_HASH Enumeration: Support of this bit is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22). If not supported, it must be 0.
46	IGNORE_ISVSVN	If set to 1, a value of 0 is used instead of the service TD's ISVSVN field when calculating SERVTD_INFO_HASH Enumeration: Support of this bit is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22). If not supported, it must be 0.
47	IGNORE_MRCONFIGSVN	If set to 1, a value of 0 is used instead of the service TD's MRCONFIGSVN field when calculating SERVTD_INFO_HASH Enumeration: Support of this bit is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22).
48	IGNORE_MROWNERCONFIGSVN	If set to 1, a value of 0 is used instead of the service TD's MROWNERCONFIGSVN field when calculating SERVTD_INFO_HASH Enumeration: Support of this bit is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22).
Other	RESERVED	Must be 0

3.12.5. SERVTD_EXT_STRUCT: Extended Service TD Info

SERVTD_EXT_STRUCT provides additional attestation context about the TD's TCB.

Table 3.70: Service TD Extended Hash Definition

Name	Offset	Size	Type	Description
INIT_INFO_HASH	0	48	SHA384	Service TD binding entry's INFO_HASH at TDH.MR.FINALIZE time
INIT_ATTR	48	8	MASK	Service TD binding entry's ATTR at TDH.MR.FINALIZE time
RESERVED	56	8		Set to 0
INIT_CPUSVN	64	16		CPUSVN at TDH.MNG.INIT time
INIT_TEE_TCB_SVN	80	16		TEE_TCB_SVN at TDH.MNG.INIT time
INIT_TEE_MODEL	96	12	TEE_MODEL_STRUCT	CPU and Platform Model information, as captured at TDH.SYS.INIT time. See 3.12.6 below.
RESERVED	108	4		Set to 0
CUR_INFO_HASH	112	48	SHA384	Current Service TD binding entry's INFO_HASH
CUR_ATTR	160	8	MASK	Current Service TD binding entry's ATTR
RESERVED	168	8		Set to 0
RESERVED	176	48	SHA384	Reserved for Cascading hash of Audit Log. Set to 0
RESERVED	224	48	SHA384	Set to 0

3.12.6. TEE_MODEL_STRUCT

TEE_MODEL_STRUCT encodes platform-specific identifiers, including the Family/Model (FM) and Platform ID, into a single value. This value is captured during TDH.SYS.INIT and is used to:

- Bind the TD's initial state to a specific platform configuration.
- Differentiate between SVNs of different platforms across operations such as migration, rebind, or attestation.

Table 3.71: TEE_MODEL_STRUCT Definition

Name	Offset (Bytes)	Size (Bytes)	Type	Description
CUSTOM	0	2	Unsigned Integer	Custom data, set to 0.
PLATFORM_ID	2	2	Unsigned Integer	Platform ID as defined in the IA32_PLATFORM_ID MSR bits 52:50, other bits are 0.
FM	4	4	Unsigned Integer	Family and Model, formatted as in CPUID(1).EAX, with the Stepping value set to 0.
RESERVED	8	4	N/A	Reserved, set to 0x80000000.

3.12.7. SERVTD_EXT_HASH

The SERVTD_EXT_HASH is the SHA384 hash of SERVTD_EXT_STRUCT.

When computing the hash for purpose of TDCS.SERVTD_ACCEPT_SERVTD_EXT_HASH, the CUR_INFO_HASH and CUR_ATTR fields are zeroed before computing the hash.

3.13. Migration Types

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

Enumeration: The following definitions are applicable for TDX Module which support TD migration, as enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0) or S4, as enumerated by TDX_FEATURES0.S4 (bit 13).

3.13.1. MBMD: Migration Bundle Metadata

MBMD is composed of a common header and variable type-specific information.

3.13.1.1. Generic MBMD Structure

The maximum overall size of MBMD is 128 bytes.

Table 3.72: Generic MBMD Structure Definition

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
SIZE	0	2	Overall size of the MBMD structure, in bytes	Yes	No
MIG_VERSION	2	2	Migration protocol version Changes in MBMD format, other migration bundle components format or migration protocol sequence require updating the protocol version. The migration protocol version is set by the MigTD before migration session starts.	Yes	No
MIGS_INDEX	4	2	Index of the migration stream used for migrating this migration bundle	As 0	Yes

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
MB_TYPE	6	1	The type of information being migrated: 0: TD-scope immutable non-memory state 1: TD-scope mutable non-memory state 2: VCPU-scope mutable non-memory state 3–15: Reserved 16: TD private memory 17–31: Reserved 32: Epoch token 33: Abort token Other: Reserved	Yes	No
RESERVED	7	1	Reserved, must be 0	Yes	No
MB_COUNTER	8	4	Per-stream migration bundle counter Starts from 0 on each migration epoch start, incremented by 1 on each MBMD export to the associated stream.	Yes	No
MIG_EPOCH	12	4	Migration epoch Starts from 0 on migration session start, incremented by 1 on each epoch token. A value of 0xFFFFFFFF indicates out-of-order phase.	Yes	No
IV_COUNTER	16	8	Monotonously incrementing counter, used as a component in the AES-GCM IV	As 0	Yes
Type-Specific Information	24	Variable	Variable-sized additional information for each specific type of MBMD	Yes	No
MAC	24+V	16	AES-256-GCM MAC over other MBMD fields and any associated migration data (all the migration pages)	No	No

3.13.1.2. TD-Scope Immutable Non-Memory State MBMD Fields

Table 3.73: TD-Scope Immutable Non-Memory State MBMD Fields Definition

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
NUM_F_MIGS	24	2	Maximum number of forward migration streams that will be used	Yes	No
RESERVED	26	2	Reserved, must be 0	Yes	No
NUM_SYS_MD_PAGES	28	1	Number of pages in the page list used for migrating TDX Module metadata	Yes	No
RESERVED	29	3	Reserved, must be 0	Yes	No

3.13.1.3. TD-Scope Mutable Non-Memory State MBMD Fields

Table 3.74: TD-Scope Mutable Non-Memory State MBMD Fields Definition

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
RESERVED	24	8	Reserved, must be 0	Yes	No

3.13.1.4. VCPU-Scope Mutable Non-Memory State MBMD Fields

Table 3.75: VCPU-Scope Mutable Non-Memory State MBMD Fields Definition

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
VP_INDEX	24	2	Virtual CPU index	Yes	No
RESERVED	26	6	Reserved, must be 0	Yes	No

5 3.13.1.5. TD Private Memory MBMD Fields

Table 3.76: TD Private Memory MBMD Type-Specific Fields Definition

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
NUM_GPAS	24	2	Number of entries in the GPA list	Yes	No
GPA_LIST_ATTRIBUTES	26	1	Attributes of the GPA list, see Table 3.77 below	Yes	No
RESERVED	27	5	Reserved, must be 0	Yes	No

Table 3.77: GPA_LIST_ATTRIBUTES

Bits	Name	Description			
2:0	FORMAT	GPA list format			
		Value	Name	Description	
		0	GPA_ONLY	A GPA list page is provided	
		1	GPA_AND_ATTR	A GPA list page and a page attributes list page are provided	
		Other	RESERVED	Reserved	
7:3	RESERVED	Reserved: must be 0			

10 3.13.1.6. Epoch Token MBMD Fields

Table 3.78: Epoch Token MBMD Fields Definition

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
TOTAL_MB	24	8	The total number of migration bundles, including the current one, which have been exported since the beginning of the migration session	Yes	No

3.13.1.7. Abort Token MBMD Fields

Table 3.79: Abort Token MBMD Fields Definition

Field	Offset (Bytes)	Size (Bytes)	Description	Included In MAC	Included in IV
RESERVED	24	8	Reserved, must be 0	Yes	No

3.13.1.8. TD Migration Protocol Version Compatibility

- 5 The table below specifies the TD migration protocol versions for which the above MBMD definition is applicable.

Table 3.80: MBMD Compatibility with TD Migration Versions

TD Migration Version	Minimum	Maximum
Export version	0	0
Import version	0	0

3.13.2. GPA List

3.13.2.1. Overview

- 10 A GPA list specifies a list of 4KB-aligned GPAs, each with associated attributes, required operation and status. A single GPA list may have up to 512 entries, is contained in a single 4KB page and must be aligned on 4KB. The GPA list may contain null entries, as indicated by the OPERATION field's value set to 0 (NOP).

Interface functions that process up to 512 GPAs, such as TDH.EXPORT.MEM, use a single GPA list page. The GPA list is specified by GPA_LIST_INFO, which contains the HPA of the GPA list page and the index of the first entry and last entry to be processed.

Interface functions that process up to 512² GPAs, such as TDH.MEM.SCAN, use multiple GPA list pages. The list of pages is specified by a page of GPA_LIST_INFO entries. The GPA list info page is specified by a PAGE_LIST_INFO, which contains the HPA of the GPA list info page and the index of the first entry and last entry to be processed.

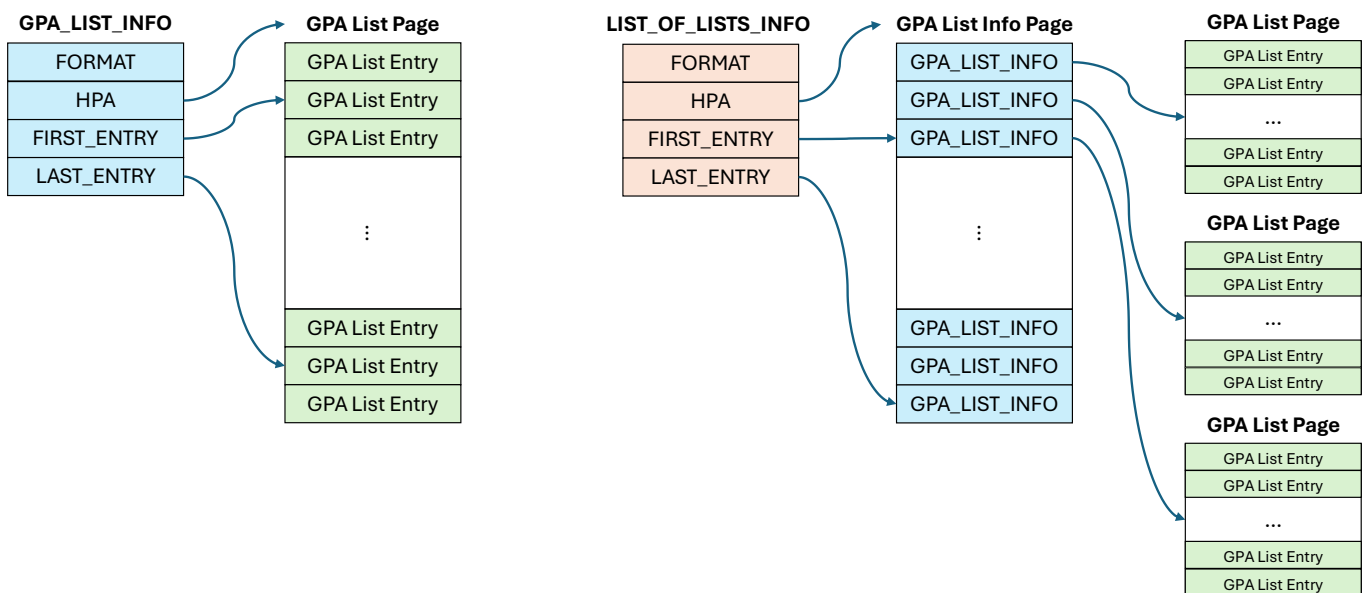


Figure 3.1: GPA List and List of Lists

3.13.2.2. GPA_LIST_INFO: HPA, First and Last Entries of a GPA List

GPA_LIST_INFO is a 64b structure used as a GPR input and output operand of multiple migration interface functions, e.g., TDH.EXPORT.MEM. It provides the HPA of the GPA list page in shared memory, and the index of the first entry and last entries to be processed. When used with some interface functions, it may provide list-of-lists information.

Table 3.81: GPA_LIST_INFO

Bits	Name	Description		
2:0	FORMAT	GPA list format		
		Value	Name	Description
		0	GPA_ONLY	A GPA list page is provided
		1	GPA_AND_L2_ATTR	GPA list and L2 page attributes list pages are provided. This format is only used by TDH.EXPORT.MEM and TDH.IMPORT.MEM. It is mandatory for migrating partitioned TDs (which contain one or more L2 VMs). TDX Module support of this feature is enumerated by TDX_FEATURES0.PARTITIONED_TD_MIGRATION, readable by TDH.SYS.RD* (see 3.3.3.1).
		2	LIST_OF_LISTS	A list-of-lists page is provided
		Other	RESERVED	Reserved
11:3	FIRST_ENTRY	Index of the first entry of the list to be processed		
51:12	HPA	Bits 51:12 of the host physical address (including HKID) of the GPA list page, which must be a shared HPA		
54:52	RESERVED	Reserved: must be 0		
63:55	LAST_ENTRY	Index of the last entry in the GPA list		

3.13.2.3. GPA List Entry

Table 3.82 below shows the format of a GPA list entry as used. The GPA list entry format is designed so that the output of TDH.EXPORT.BLOCKW, TDH.MEM.SCAN.COMP and TDH.MEM.SCAN.RANGE can be used directly with TDH.EXPORT.MEM, and the output of TDH.EXPORT.MEM can be used directly with TDH.IMPORT.MEM.

Table 3.82: GPA List Entry Definition

Bit(s)	Size	Name	Description	TDH.MEM.SCAN	TDH.EXPORT.BLOCKW		TDH.EXPORT.MEM		TDH.IMPORT.MEM		TDH.EXPORT.RESTORE	
				Out	In	Out	In	Out	In	Out	In	Out
1:0	2	LEVEL	Mapping level (size)	0 (4KB), 1 (2MB) or 2 (1GB)	Must be 0 (4KB)	Unmod.	Must be 0 (4KB)	Unmod.	Must be 0 (4KB)	Unmod.	Must be 0 (4KB)	Unmod.
2	1	PENDING	See below	Yes	Ignored	Unmod.	Ignored	Yes	Yes	Unmod.	Ignored	Unmod.
4:3	2	STATE	See below	Yes	Must be 0	Unmod.	Ignored	0	Must be 0	Unmod.	Must be 0	Unmod.
6:5	2	RESERVED	Reserved	0	Must be 0	Unmod.	Must be 0	Unmod.	Must be 0	Unmod.	Must be 0	Unmod.
9:7	3	L2_MAP	See below	0	Ignored	Unmod.	Ignored	Yes	Yes	Unmod.	Ignore	Unmod.
11:10	2	MIG_TYPE	See below	0	Yes	Unmod.	Yes	Unmod.	Yes	Unmod.	Yes	Unmod.

Bit(s)	Size	Name	Description	TDH.MEM. SCAN	TDH.EXPORT. BLOCKW		TDH.EXPORT. MEM		TDH.IMPORT. MEM		TDH.EXPORT. RESTORE	
				Out	In	Out	In	Out	In	Out	In	Out
51:12	40	GPA	Guest Physical Address bits 51:12	Yes	Yes	Unmod.	Yes	Unmod.	Yes	Unmod.	Yes	Unmod.
53:52	2	OPERATION	See below	Yes ¹⁰	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
55:54	2	RESERVED	Reserved	0	Must be 0	Unmod.	Must be 0	Unmod.	Must be 0	Unmod.	Must be 0	Unmod.
60:56	5	STATUS	See below	Yes ¹¹	Ignored	Yes	Ignored	Yes	Ignored	Yes	Ignored	Yes
63:61	3	RESERVED	Reserved	0	Must be 0	Unmod.	Must be 0	Unmod.	Must be 0	Unmod.	Must be 0	Unmod.

3.13.2.4. GPA List Entry Details

3.13.2.4.1. LEVEL

LEVEL specifies the GPA mapping size for this entry, as shown in the table below.

Table 3.83: LEVEL Definition

Level	GPA Mapping Size
0	4KB
1	2MB
2	1GB
3	Reserved

For TDH.EXPORT.BLOCKW, TDH.EXPORT.MEM, TDH.EXPORT.RESTORE and TDH.IMPORT.MEM only level 0 (4KB) is supported.

3.13.2.4.2. PENDING

Indicates that the page is Pending. Note that the actual SEPT entry state may be one of multiple PENDING* states.

3.13.2.4.3. STATE

Provides a hint about the page state.

Table 3.84: STATE Values Definition for TDH.MEM.SCAN*

Value	Output	
	Name	Description
0	NOT_EXPORTED	Page is a candidate for initial export.
1	EXPORTED_MODIFIED	Page is a candidate for re-export due to updated content or attributes.
2	EXPORTED_BLOCKED	Page is a candidate for re-export due to being blocked. Blocking is an interim state followed by some other memory management operation; the host VMM may decide to defer the re-export.
3	EXPORTED_REMOVED	Page is a candidate for re-export due to being removed.

¹⁰ OPERATION value for TDH.MEM.SCAN.RANGE(DSCAN) and TDH.MEM.SCAN.COMP(DCHECK) is always MIGRATE.

¹¹ STATUS value for TDH.MEM.SCAN.RANGE(DSCAN) and TDH.MEM.SCAN.COMP(DCHECK) is always SUCCESS.

3.13.2.4.4. L2_MAP

A bitmap which indicates whether the page is mapped in one or more L2 VM. This field is provided as part of the GPA list entry to enable the host VMM to prepare L2 SEPT pages before invoking TDH.IMPORT.MEM.

3.13.2.4.5. OPERATION

- 5 The following tables describe the meaning of OPERATION, as used for each applicable interface function. Note that the OPERATION definitions for TDH.EXPORT.BLOCKW, TDH.EXPORT.MEM and TDH.IMPORT.MEM are designed to be compatible, so that the same GPA list can be used for all of them.

OPERATION Values for TDH.EXPORT.BLOCKW**Table 3.85: OPERATION Values Definition for TDH.EXPORT.BLOCKW**

Value	Input		Output	
	Name	Description	Name	Description
0	NOP	No operation	NOP	Not blocked for writing
1	BLOCKW	Block for writing	BLOCKW	Blocked for writing
2	NOP	No operation	NOP	Not blocked for writing
3	BLOCKW	Block for writing	BLOCKW	Blocked for writing

OPERATION Values for TDH.MEM.SCAN***Table 3.86: OPERATION / STATE Values Definition for TDH.MEM.SCAN***

Value	Input		Output	
	Name	Description	Name	Description
0	N/A	N/A	RESERVED	Reserved
1	N/A	N/A	EXPORT	Export
2	N/A	N/A	RESERVED	Reserved
3	N/A	N/A	RESERVED	Reserved

OPERATION Values for TDH.EXPORT.MEM (For Write Blocking Based Export)

- 15 Note that on input, the MIGRATE operation is represented by two possible values. This is done for direct compatibility with the TDH.EXPORT.BLOCKW output.

Table 3.87: OPERATION Values Definition for TDH.EXPORT.MEM (Write Blocking Export)

Value	Input		Output	
	Name	Description	Name	Description
0	NOP	No operation	NOP	Not exported
1	MIGRATE	Export (may result in MIGRATE or REMIGRATE, as determined by the TDX Module)	MIGRATE	Initial export during this migration session or following a CANCEL
2	CANCEL	Cancel previous export	CANCEL	Cancellation of a previous export Not applicable for S4 hibernation.
3	MIGRATE	Export	REMIGRATE	Re-export of updated content or attributes

OPERATION Values for TDH.EXPORT.MEM (For Non-Blocking Export)**Table 3.88: OPERATION Values Definition for TDH.EXPORT.MEM (Non-Blocking Export)**

Value	Input		Output	
	Name	Description	Name	Description
0	NOP	No operation	NOP	Not exported
1	EXPORT	Export request (may result in MIGRATE, REMIGRATE or CANCEL, as determined by the TDX Module)	MIGRATE	Initial export during this migration session or following a CANCEL
2	NOP	No operation	CANCEL	Cancellation of a previous export Not applicable for S4 hibernation.
3	NOP	No operation	REMIGRATE	Re-export of updated content or attributes

OPERATION Values for TDH.IMPORT.MEM**Table 3.89: OPERATION Values Definition for TDH.IMPORT.MEM**

Value	Input		Output	
	Name	Description	Name	Description
0	NOP	No operation	NOP	Not imported
1	MIGRATE	Initial import during this migration session or following a CANCEL	MIGRATE	Imported
2	CANCEL	Cancel previous import	CANCEL	Removed previous import Not applicable for S4 resumption.
3	REMIGRATE	Re-import of updated page content or attributes	REMIGRATE	Imported Not applicable for S4 resumption.

OPERATION Values for TDH.EXPORT.RESTORE**Table 3.90: OPERATION Values Definition for TDH.EXPORT.RESTORE**

Value	Input		Output	
	Name	Description	Name	Description
0	NOP	No operation	NOP	Not restored
1	RESTORE	Restore SEPT entry to non-migration state	RESTORE	Restored
2	NOP	Reserved	NOP	Not restored
3	RESTORE	Restore SEPT entry to non-migration state	RESTORE	Restored

3.13.2.4.6. MIG_TYPE**Table 3.91: MIG_TYPE Values Definition**

Value	Name	Description
0	PAGE_4K	4KB private memory page
Other	RESERVED	Reserved for future types

3.13.2.4.7. STATUS**Table 3.92: STATUS Values Definition**

Value	Name	Description
0	SUCCESS	GPA list entry was processed successfully
1	SKIPPED	GPA list entry was skipped because NOP was requested
2	SEPT_WALK_FAILED	Secure EPT walk failed for the requested GPA
3	SEPT_ENTRY_BUSY_HOST_PRIORITY	Secure EPT entry was busy. The host VMM should retry the operation until successful.
4	SEPT_ENTRY_STATE_INCORRECT	Secure EPT entry state was incorrect for the requested operation and the TD's OP_STATE
5	TLB_TRACKING_NOT_DONE	TLB tracking was not done for the requested GPA
6	OP_STATE_INCORRECT	The TD's OP_STATE was incorrect for the requested operation and Secure EPT entry state
7	MIGRATED_IN_CURRENT_EPOCH	Requested GPA has already been migrated during the current migration epoch
8	MIG_BUFFER_NOT_AVAILABLE	Required migration buffer was not provided
9	NEW_PAGE_NOT_AVAILABLE	Required new TD page was not provided
10	INVALID_PAGE_MAC	Page MAC was invalid
11	DISALLOWED_IMPORT_OVER_REMOVED	Page import over a removed page is not allowed
12	TD_PAGE_BUSY_HOST_PRIORITY	TD page was busy. The host VMM should retry the operation until successful.
13	L2_SEPT_WALK_FAILED	L2 Secure EPT walk failed for the requested GPA
14	ATTR_LIST_ENTRY_INVALID	The L2 attributes list entry is invalid
15	GPA_LIST_ENTRY_INVALID	The GPA list entry is invalid
16	INVALID_MIGRATION_BUFFER_HPA	The provided migration buffer HPA is not valid
17	PAGE_DIRTY	Page not exported because the SEPT entry's Dirty bit was set
31-18	Reserved	Reserved

5 3.13.2.5. TD Migration Protocol Version Compatibility

The table below specifies the TD migration protocol versions for which the above GPA List definition is applicable.

Table 3.93: GPA List Compatibility with TD Migration Versions

TD Migration Version	Minimum	Maximum
Export version	0	0
Import version	0	0

3.13.3. Memory Migration Buffers List

10 A memory migration buffer list specifies a list of HPAs of 4KB pages in shared memory, to be used as output by TDH.EXPORT.MEM and as input by TDH.IMPORT.MEM. The list may have up to 512 64-bit entries, each containing a 4KB-aligned HPA (including HKID bits) of a page in shared memory. The list is contained in a single 4KB page and must be aligned on 4KB. The page list may contain null entries, indicated by the INVALID bit.

3.13.3.1. Migration Buffers List Entry

Table 3.94: Migration Buffers List Entry

Bits	Name	Description
11:0	RESERVED	Reserved: must be 0 (unless bit 63 indicates an invalid entry)
51:12	HPA	Bits 51:12 of the host physical address (including HKID) of the migration buffer page, which must be a shared HPA
62:52	RESERVED	Reserved: must be 0 (unless bit 63 indicates an invalid entry)
63	INVALID	A value of 1 indicates that this entry is invalid

3.13.4. Page Attributes List

- 5 A page attributes list specifies a list of page aliases, to be used as output by TDH.EXPORT.MEM and as input by TDH.IMPORT.MEM. The list must contain an entry for each respective GPA list entry used with the same interface functions. The list may have up to 512 64-bit entries, in page L2 attributes format as defined in 3.6.3. The list is contained in a single 4KB page and must be aligned on 4KB. A page attributes list is mandatory for migrating partitioned TDs (which contain one or more L2 VMs).
- 10 **Enumeration:** TDX Module support of page attributes list is enumerated by TDX_FEATURES0.PARTITIONED_TD_MIGRATION, readable by TDH.SYS.RD* (see 3.3.3.1).

3.13.5. Memory Migration Page MAC List

- 15 A page MAC list specifies a list of MACs over 4KB migrated pages, their GPA list entries and (if applicable) page L2 attributes list entries, to be used as output by TDH.EXPORT.MEM and as input by TDH.IMPORT.MEM. The list must contain an entry for each respective GPA list entry used with the same interface functions. The list may have up to 256 128-bit entries, each containing a single AES-GMAC-256 of a migrated page. The list is contained in a single 4KB page and must be aligned on 4KB.

3.13.6. Non-Memory State Migration Buffers List

- 20 A non-memory state migration buffer list specifies a list of HPAs of 4KB pages in shared memory, to be used as output by TDH.EXPORT.STATE.* and as input by TDH.IMPORT.STATE.*. The list may have up to 512 64-bit entries, each containing a 4KB-aligned HPA (including HKID bits) of a page in shared memory. The list is contained in a single 4KB page and must be aligned on 4KB.

3.13.6.1. PAGE_LIST_INFO: HPA and Attributes of a Page List

- 25 PAGE_LIST_INFO is a 64b structure used as a GPR input and output operand of multiple migration interface functions, e.g., TDH.EXPORT.STATE.TD. It provides the HPA of the migration buffers list page in shared memory, and the index of the last entry to be processed.

Table 3.95: PAGE_LIST_INFO

Bits	Name	Description
11:0	RESERVED	Reserved: must be 0
51:12	HPA	Bits 51:12 of the host physical address (including HKID) of the page list, which must be a shared HPA
54:52	RESERVED	Reserved: must be 0
63:55	LAST_ENTRY	Index of the last entry in the page list

4. TD Metadata (Non-Memory State)

This chapter describes the details of TD metadata, a.k.a. non-memory state or control state.

4.1. TD-Scope Metadata

TD-scope control structures TDR and TDCS are described in the [TDX Module Base Spec].

4.1.1. TD-Scope Metadata Description Files

Most of the TD-scope metadata information is provided in separate files:

- **td_scope_metadata.pdf** provides a human-readable TD-scope metadata table.
- **td_scope_metadata.csv** provides the same table in a Comma-Separated Values (CSV) format. This file can be imported, if required, to tools such as MS Excel for further processing.

The tables below describe the information provided by those files.

In addition to the above files, **td_scope_metadata.json**, a JSON format file with the same information is provided.

Table 4.1: TD-Scope Metadata Table Description

Column	Description
TDX_FEATURES Enum. Bits	The set of TDX_FEATURES field bits, readable by TD*.SYS.RD*, which enumerate support for this field. One or more comma-separated bit numbers may be specified. If the value of any of those bits is, the field is supported. The special value “Always” means that the field is always supported. The special value “None” means that there is no enumeration for the support of this field. This is only used for fields that are accessible only for debuggable TDs.
Class	Field class, see below for details
Field	Field name
Description	Field description
Type	Field type
VM Applic.	For field arrays where each entry is associated with a VM, this column specifies VM applicability: • L1_AND_L2 • L1_ONLY • L2_ONLY
Init Value	Initial value
Field Size (Bytes)	Field size
Max Num Fields	Maximum number of fields in an array. The description text specified how the actual number of fields in enumerated. A value of “None” indicates that no maximum number is specified.
Num Elem.	Number of elements within each field
Elem. Size (Bytes)	Size of each element
Base FIELD_ID (Hex)	Base FIELD_ID
VMM Access Prod.	Host VMM access for production TDs
VMM Access Debug	Host VMM access for debuggable TDs
Guest Access	Guest TD access
MigTD Access	Migration TD access
VMM Wr Mask Prod.	Host VMM write mask for production TDs

Column	Description
	A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.
VMM Wr Mask Debug	Host VMM write mask for debuggable TDs A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.
Guest Wr Mask	Guest TD write mask A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.
MigTD Wr Mask	Migration TD write mask A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.

4.1.2. TDR

Note: This section describes TDR, as defined. Implementation may differ.

TDR is the root control structure of a guest TD. TDR is encrypted using the Intel TDX global private HKID. It contains the minimal set of fields that allow TD management operation when the guest TD's private ephemeral HKID is not known yet or when the TD's key state is such that memory encrypted with the guest TD's private ephemeral key is not accessible.

TDR occupies a single 4KB naturally aligned page of memory. It is the first TD page to be allocated and the last to be removed. None of the state in the TDR is migrated – it is locally initialized on the destination platform for a migrated TD.

TRD fields are divided into the following classes:

Table 4.2: TDR Field Classes Definition

Field Class	Description
TD Management	These fields are used to manage the TDR page, its descendent TD private memory pages and control structure pages.
Key Management	These fields are used by the Intel TDX Module to manage memory encryption keys. See the [TDX Module Base Spec] for details.
TD Preserving	These fields are used by the Intel TDX Module to manage the TD across TD preserving updates.

4.1.3. TDCS

4.1.3.1. Overview

Note: This section describes TDCS, as defined. Implementation may differ.

TDCS complements TDR as the logical control structure of a guest TD. TDCS is encrypted with the guest TS's ephemeral private key. It controls the guest TD operation and holds the state that is global to all the TD's VCPUs. TDCS state fields are initialized either via TDH.MNG.INIT, or via TDH.IMPORT.STATE.IMMUTABLE – the latter when the TD is the target for migration.

Most TDCS fields are described in a separate JSON format file **td_scope_metadata.json**. The sections below provide additional information for specific fields.

TDCS fields are divided into the following classes:

Table 4.3: TDCS Field Classes Definition

Field Class	Description
TD Management	These fields are used to manage the TDCS, its descendent TD private memory pages and control structure pages.
TD Execution Control	Control the execution of the guest TD: some TD execution control fields are provided as an input to TDH.MNG.INIT, and some of those are included in the TDG.MR.REPORT.
TLB Epoch Tracking	Track the TLB epoch of the guest TD – see the [TDX Module Base Spec] for details
Measurement	TD measurement registers and associated fields – see the [TDX Module Base Spec] for details
Migration	TDCS fields that control TD migration
MIGSC Links	Links to Migration Stream Context pages
Service TD	TDCS fields that control Service TD binding and operation
MSR Bitmaps	MSR bitmaps that control VM exit from the guest TD on RDMSR/WRMSR are common to all TD VCPUs and thus are stored as part of TDCS.
Secure EPT Root Page	The root page (PML5 or PML4) of the secure EPT
L2 Secure EPT Root[3:1]	The root pages (PML5 or PML4) of the secure EPTs associated with L2 VM 1, 2 and 3

Following is some information about specific VMCS fields that are too extensive to provide in the JSON format files.

5 4.1.3.2. **TDCS.FEATURE_PARAVIRT_CTRL**

Enumeration: Availability of FEATURE_PARAVIRT_CTRL is enumerated by TDX_FEATURES0.VE_REDUCTION (bit 30).

If TDCS.TD_CTRL.REDUCE_VE is set, the guest TD can control CPU feature paravirtualization by writing to TDCS.FEATURE_PARAVIRT_CTRL using TDG.VM.WR. The default value of TDCS.FEATURE_PARAVIRT_CTRL is all-0. The following table shows the virtualization behavior of each of the configurable CPU features, depending on the control bits combination as configured by the guest TD.

Table 4.4: TDCS.FEATURE_PARAVIRT_CTRL Definition

Bits	Paravirtualized Feature Name & Applicable Linux Kernel Feature Name	Backward Compatible (TD_CTLS.REDUCE_VE is 0)	Reduced #VE (TD_CTLS.REDUCE_VE is 1, FEATURE_PARAVIRT_CTRL bit is 0)	Reduced #VE with Paravirtualization (TD_CTLS.REDUCE_VE is 1, FEATURE_PARAVIRT_CTRL bit is 1)
0	CORE_CAPABILITIES (X86_FEATURE_CORE_CAPABILITIES)	Controls IA32_CORE_CAPABILITIES paravirtualization, enumerated by virtual CPUID(7,0).EDX[30] (support IA32_CORE_CAPABILITIES) - Virtual CPUID(7,0).EDX[30] is forced to 1. - Guest TD access to applicable MSRs results in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(7,0).EDX[30] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(7,0).EDX[30] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
		Controls Direct Cache Access paravirtualization, enumerated by virtual CPUID(1).ECX[18] (DCA)		

Bits	Paravirtualized Feature Name & Applicable Linux Kernel Feature Name	Backward Compatible (TD_CTL.S.REDUCE_VE is 0)	Reduced #VE (TD_CTL.S.REDUCE_VE is 1, FEATURE_PARAVIRT_CTL.S bit is 0)	Reduced #VE with Paravirtualization (TD_CTL.S.REDUCE_VE is 1, FEATURE_PARAVIRT_CTL.S bit is 1)
1	DCA (X86_FEATURE_DCA)	- Virtual CPUID(1).ECX[18] is configured by the host VMM. - Virtual CPUID(9) results in a #VE(CONFIG_PARAVIRT). - Guest TD access to applicable MSRs may result in a #GP(0) or #VE(CONFIG_PARAVIRT), depending on virtual CPUID(1).ECX[18] value.	- Virtual CPUID(1).ECX[18] is forced to 0. - Virtual CPUID(9) returns all-0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(1).ECX[18] is configured by the host VMM. - If configured as 0: - Virtual CPUID(9) returns all-0. - Guest TD access to applicable MSRs results in a #GP(0). - Else (configured as 1): - Virtual CPUID(9) results in a #VE(CONFIG_PARAVIRT). - Guest TD access to applicable MSRs results in a #VE(CONFIG_PARAVIRT).
2	EST (X86_FEATURE_EST)	Controls Enhanced Intel SpeedStep technology paravirtualization, enumerated by Virtual CPUID(1).ECX[7] (Enhanced Intel SpeedStep technology)		
		- Virtual CPUID(1).ECX[7] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(1).ECX[7] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(1).ECX[7] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
3	MCA (X86_FEATURE_MCA)	Controls Machine Check Architecture paravirtualization, enumerated by virtual CPUID(1).EDX[7] (Machine Check Exception) and virtual CPUID(1).EDX[14] (Machine Check Architecture)		
		- Virtual CPUID(1).EDX[7] and virtual CPUID(1).EDX[14] are forced to 1. - Guest TD access to applicable MSRs result in a #VE(CONFIG_PARAVIRT). - CR4.MCE is fixed-1. Guest TD attempt to clear it result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(1).EDX[7] and virtual CPUID(1).EDX[14] are forced to 0. - Guest TD access to applicable MSRs results in a #GP(0). - CR4.MCE is initialized to 1. The guest TD may clear CR4.MCE but not set it back to 1; attempt to do so results in a #GP(0).	- Virtual CPUID(1).EDX[7] and virtual CPUID(1).EDX[14] are configured by the host VMM. - If virtual CPUID(1).EDX[14] is 0, guest TD access to applicable MSRs results in a #GP(0). Else, it results in a #VE(CONFIG_PARAVIRT). - CR4.MCE is initialized to 1. If virtual CPUID(1).EDX[7] is 0, the guest TD may clear CR4.MCE but not set it back to 1; attempt to do so results in a #GP(0). Else, guest TD is allowed to modify CR4.MCE.
4	MTRR (X86_FEATURE_MTRR)	Controls Memory Type Range Registers paravirtualization, enumerated by virtual CPUID(1).EDX[12] (Memory Type Range Registers)		
		- Virtual CPUID(1).EDX[12] is forced to 1. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(1).EDX[12] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(1).EDX[12] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
		Controls PCONFIG paravirtualization, enumerated by virtual CPUID(7,0).EDX[18] (PCONFIG)		

Bits	Paravirtualized Feature Name & Applicable Linux Kernel Feature Name	Backward Compatible (TD_CTLS.REDUCE_VE is 0)	Reduced #VE (TD_CTLS.REDUCE_VE is 1, FEATURE_PARAVIRT_CTLS bit is 0)	Reduced #VE with Paravirtualization (TD_CTLS.REDUCE_VE is 1, FEATURE_PARAVIRT_CTLS bit is 1)
5	PCONFIG (X86_FEATURE_PCONFIG)	- Virtual CPUID(7,0).EDX[18] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(7,0).EDX[18] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(7,0).EDX[18] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
6	RDT_A (X86_FEATURE_RDT_A)	Controls RDT-A paravirtualization, enumerated by virtual CPUID(7,0).EBX[15] (RDT-A)		
		- Virtual CPUID(7,0).EBX[15] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(7,0).EBX[15] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(7,0).EBX[15] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
7	RDT_M (X86_FEATURE_CQM)	Controls RDT-M paravirtualization, enumerated by virtual CPUID(7,0).EBX[12] (RDT-M)		
		- Virtual CPUID(7,0).EBX[12] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(7,0).EBX[12] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(7,0).EBX[12] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
8	ACPI (X86_FEATURE_ACPI)	Controls Thermal Monitor and Software Controlled Clock Facilities paravirtualization, enumerated by virtual CPUID(1).EDX[22] (ACPI)		
		- Virtual CPUID(1).EDX[22] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(1).EDX[22] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(1).EDX[22] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
9	TM2 (X86_FEATURE_TM2)	Controls MSR_THERM2_CTL paravirtualization, enumerated by virtual CPUID(1).ECX[8] (TM2)		
		- Virtual CPUID(1).ECX[8] is configured by the host VMM. - Guest TD access to MSR_THERM2_CTL may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(1).ECX[8] is forced to 0. - Guest TD access to MSR_THERM2_CTL results in a #GP(0).	- Virtual CPUID(1).ECX[8] is configured by the host VMM. - Guest TD access to MSR_THERM2_CTL may result in a #VE(CONFIG_PARAVIRT).
10	TME (X86_FEATURE_TME)	Controls Total Memory Encryption paravirtualization, enumerated by virtual CPUID(7,0).ECX[13] (TME_EN)		
		- Virtual CPUID(7,0).ECX[13] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).	- Virtual CPUID(7,0).ECX[13] is forced to 0. - Guest TD access to applicable MSRs results in a #GP(0).	- Virtual CPUID(7,0).ECX[13] is configured by the host VMM. - Guest TD access to applicable MSRs may result in a #VE(CONFIG_PARAVIRT).
11	TSC_DEADLINE	Controls IA32_TSC_DEADLINE MSR paravirtualization, enumerated by virtual CPUID(1).ECX[24] (TSC deadline)		

Bits	Paravirtualized Feature Name & Applicable Linux Kernel Feature Name	Backward Compatible (TD_CTL.S.REDUCE_VE is 0)	Reduced #VE (TD_CTL.S.REDUCE_VE is 1, FEATURE_PARAVIRT_CTL.S bit is 0)	Reduced #VE with Paravirtualization (TD_CTL.S.REDUCE_VE is 1, FEATURE_PARAVIRT_CTL.S bit is 1)
	(X86_FEATURE_TSC_DEADLINE_TIMER)	- Virtual CPUID(1).ECX[24] is configured by the host VMM. - Guest TD access to the IA32_TSC_DEADLINE MSR may result in a #GP(0) or #VE(CONFIG_PARAVIRT), depending on virtual CPUID(1).ECX[24].	- Virtual CPUID(1).ECX[24] is forced to 0. - Guest TD access to the IA32_TSC_DEADLINE MSR results in a #GP(0).	- Virtual CPUID(1).ECX[24] is configured by the host VMM. - Guest TD access to the IA32_TSC_DEADLINE MSR may result in a #VE(CONFIG_PARAVIRT).
63:12	RESERVED	Must be 0		

4.1.3.3. TDCS.PID_MODE[4]

Unreleased Feature: This section is related to Enhanced Interrupt Virtualization, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

Array of per-VM PID modes.

Table 4.5: TDCS.PID_MODE

Value	Name	Description
0	REG_PID	Default value: Regular PID in shared memory (L1 only) For L1, a applies either when legacy interrupt virtualization is used (TDCS.INTR_CONFIG_MODE is CONFIG_LEGACY) or when enhanced interrupt virtualization has been configured (TDCS.INTR_CONFIG_MODE is CONFIG_DONE). For L2, this value indicates no PID is configured.
1	SEC_PID	Secure PID Applies only when enhanced interrupt virtualization has been configured (TDCS.INTR_CONFIG_MODE is CONFIG_DONE).
2	SHR_PID	Shared PID Applies only when enhanced interrupt virtualization has been configured (TDCS.INTR_CONFIG_MODE is CONFIG_DONE).
3	DUAL_PID	Dual PID: Secure PID and Shared PID Applies only when enhanced interrupt virtualization has been configured (TDCS.INTR_CONFIG_MODE is CONFIG_DONE).
Other	Reserved	Reserved

4.1.3.4. TDCS.TD_CTL.S

TD_CTL.S is a bitmap of TD controls that may be modified by the guest TD (L1 only) during TD run time.

Table 4.6: TDCS.TD_CTLS Definition

Bits	Name	Description
0	PENDING_VE_DISABLE	Controls the way guest TD access to a PENDING page is processed: 0 (default): An EPT violation due to guest TD access to a PENDING page results in a #VE(PENDING). 1: An EPT violation due to guest TD access to a PENDING page results in a TD exit. The above applies only to L1. L2 VM access to a PENDING page always results in an L2→L1 exit. PENDING_VE_DISABLE's initial value is copied from the TD's ATTRIBUTES.SEPT_VE_DISABLE. If the TD's CONFIG_FLAGS.FLEXIBLE_PENDING_VE is 1, the TD is allowed to modify PENDING_VE_DISABLE using TDG.VM.WR. Enumeration: TDX Module support of PENDING_VE_DISABLE is enumerated by TDX_FEATURES0.PENDING_EPT_VIOLATION_V2 (bit 16). If not supported, PENDING_VE_DISABLE must be 0.
1	ENUM_TOPOLOGY	Controls the enumeration of virtual platform topology: 0 (default): Guest TD execution of CPUID(0xB) or CPUID(0x1F) results in a #VE(CONFIG_PARAVIRT). CPUID(1).EBX[31:24] returns the least significant 8 bits of the VCPU index. RDMSR of IA32_X2APIC_APICID (0x802) results in #VE(CONFIG_PARAVIRT). 1: Guest TD execution of CPUID(0xB) or CPUID(0x1F) returns the virtual topology information configured by the host VMM. CPUID(1).EBX[31:24] returns the least significant 8 bits of the virtual x2APIC_ID configured by the host VMM. RDMSR of IA32_X2APIC_APICID (0x802) returns the virtual x2APIC_ID. ENUM_TOPOLOGY can only be set to 1 if x2APIC_ID has been properly configured with unique values for each VCPU. The guest TD can read TDCS.TOPOLOGY_ENUM_CONFIGURED using TDG.VM.RD to check that. ENUM_TOPOLOGY is implicitly set by the TDX Module if the guest TD sets REDUCE_VE. Enumeration: TDX Module support of ENUM_TOPOLOGY is enumerated by TDX_FEATURES0.TOPOLOGY_ENUM (bit 20). If not supported, ENUM_TOPOLOGY must be 0.
2	VIRT_CPUID2	Controls the virtualization of CPUID(2): 0 (default): Guest TD execution of CPUID(2) results in a #VE(CONFIG_PARAVIRT). 1: Guest TD execution of CPUID(2) returns fixed values EAX=0x00FEFF01, EBX=0, ECX=0 and EDX=0, meaning "cache data is returned by CPUID leaf 0x4" and "TLB data is returned by CPUID leaf 0x18". VIRT_CPUID2 is implicitly set by the TDX Module if the guest TD sets REDUCE_VE. Enumeration: TDX Module support of VIRT_CPUID2 is enumerated by TDX_FEATURES0.CPUID2_VIRT (bit 29). If not supported, VIRT_CPUID2 must be 0.
3	REDUCE_VE	Allows the guest TD to control the way #VE is injected by the TDX Module on guest TD execution of CPUID, RDMSR/WRMSR and other instructions: 0 (default): No change to default behavior.

Bits	Name	Description
		1: #VE injected on guest TD execution of CPUID, RDMSR/WRMSR and other instructions is greatly reduced. Some #VE injection depends on CPUID configuration of paravirtualized CPU features using TDCS.FEATURE_PARAVIRT_CTRL, see 4.1.3.2 above. When the guest TD sets REDUCE_VE to 1, the TDX Module also forces ENUM_TOPOLOGY and VIRT_CPUID to 1. REDUCE_VE can only be set to 1 if x2APIC_ID has been properly configured with unique values for each VCPU. The guest TD can read TDCS.TOPOLOGY_ENUM_CONFIGURED using TDG.VM.RD to check that. For a list of virtual CPUID values, MSRs and instructions impacted by REDUCE_VE, see Ch. 2. Enumeration: TDX Module support of REDUCE_VE is enumerated by TDX_FEATURES0.VE_REDUCTION (bit 30). If not supported, REDUCE_VE must be 0.
4	ENABLE_HW_KEYS	Controls whether a migratable TD can request a sealing key using TDG.MR.KEY.GET. 0 (default): The TD can request a sealing key using TDG.MR.KEY.GET only if the host VMM configured its CONFIG_FLAGS.SEALING as 1. 1: The TD can request a sealing key using TDG.MR.KEY.GET regardless of CONFIG_FLAGS.SEALING's value. Enumeration: TDX Module supports ENABLE_HW_KEYS if TDX_FEATURES0.HW_SEALING (bit 12) is enumerated as 1. If not supported, ENABLE_HW_KEYS must be 0.
62:5	RESERVED	Must be 0
63	LOCK	Controls locking of TD-writable virtualization controls. 0 (default): No change to default behavior. 1: Control fields are locked and can't be modified. The following TD-writable control fields are impacted: • TDCS.TD_CTLS • TDCS.FEATURE_PARAVIRT_CTRL • TDVPS.CPUID_SUPERVISOR_VE • TDVPS.CPUID_USER_VE • TDVPS.CPUID_CONTROL Enumeration: TDX Module support of LOCK is enumerated by TDX_FEATURES0.VE_REDUCTION (bit 30). If not supported, must be 0.

4.1.3.5. TDCS.VM_CTLS

VM_CTLS is an array of 4 64-bit control fields, with entries for L1 and each L2 VM. VM_CTLS is writable by the host VMM using TDH.MNG.WR. It may be modified during TD run time and is migratable.

Table 4.7: TDCS.VM_CTLS Per-VM Entry Definition

Bit	Name	Description	Default Value	TDX_FEATURES0 Enumeration Bit
0	EPT_VIOLATION_ON_L2_SEPT_WALK_FAILURE	If set, a TDCALL flow that encounters an L2 SEPT walk error due to a missing SEPT page causes a TD exit with an EPT violation exit reason. Else, it returns an error code to the guest. Applies only to L2 SEPTs.	0	Always available
1	HINT_ON_VINTR_PENDING	If set for the current VM, then on any synchronous TD exit (initiated by TDG.VP.VMCALL) from any VM, if TDVPS.VCPU_STATE_DETAILS.VINTR_PENDING for the current VM is 1, then the IMM_RESUME_HINT flag is set. Else, the IMM_RESUME_HINT flag is not impacted by this condition.	0	ENHANCED_INTR_STATE (bit 40)
2	HINT_ON_VINTR_IN_SERVICE	If set for the current VM, then on any synchronous TD exit (initiated by TDG.VP.VMCALL) from any VM, if TDVPS.VCPU_STATE_DETAILS.VINTR_IN_SERVICE for the current VM is 1, then the IMM_RESUME_HINT flag is set. Else, the IMM_RESUME_HINT flag is not impacted by this condition.	0	ENHANCED_INTR_STATE (bit 40)
3	HINT_ON_VNMI_PENDING	If set for the current VM, then on any synchronous TD exit (initiated by TDG.VP.VMCALL) from any VM, if TDVPS.VCPU_STATE_DETAILS.VNMI_PENDING for the current VM is 1, then the IMM_RESUME_HINT flag is set. Else, the IMM_RESUME_HINT flag is not impacted by this condition. Note: VNMI_PENDING is only supported for L1.	0	ENHANCED_INTR_STATE (bit 40)
Other	RESERVED	Reserved, must be 0	0	N/A

4.2. TDVPS: VCPU-Scope Metadata

Note: This section describes TDVPS, as defined. Implementation may differ.

- 5 TDVPS is described in the [TDX Module Base Spec].

4.2.1. Overview

Logically, in the Intel TDX Module's linear address space, TDVPS is a single structure that holds the state and control information for a single TD VCPU. The state is loaded to the LP on TD Entry and saved on TD exits.

- 10 Physically, TDVPS is composed of a root page (TDVPR) and multiple extension pages (TDCX). The pages need not be contiguous in physical memory.

TDVPS is initialized by TDH.VP.INIT. For an TD being migrated, TDVPS is imported by TDH.IMPORT.STATE.VP, which initializes some state fields and migrates some fields from the source TD VPS state.

TDVPS fields are divided into the following classes:

Table 4.8: TDVPS Field Classes Definition

Field Class	Description
VCPU Management	These fields are used to manage the TDVPS and the TD VCPU.
TD VMCS	The TD VCPU's L1 VM architectural VMCS
VAPIC	The TD VCPU's Virtual APIC page
VE_INFO	Holds Virtualization Exception (#VE) information
Guest GPR State	TD VCPU's general-purpose register state
Guest MSR State	TD VCPU's MSR state
Guest Extended State	TD VCPU's extended state
VMCS[3:1]	VMCS pages of L2 VM 1, 2 and 3
MSR Bitmaps[3:1]	MSR bitmap pages of L2 VM 1, 2 and 3
MSR Bitmaps Shadow[3:1]	MSR bitmap shadow pages of L2 VM 1, 2 and 3

4.2.2. TDVPS (excluding TD and L2 VMCSes)

- 5 Most TDVPS fields are described in a separate JSON format file **vcpu_scope_metadata.json**. The sections below provide additional information for specific fields.

4.2.2.1. TDVPS Description Files

Most TDVPS fields information is provided in separate files:

- **vcpu_scope_metadata.pdf** provides a human-readable TDVPS table.
- 10 • **vcpu_scope_metadata.csv** provides the same table in a Comma-Separated Values (CSV) format. This file can be imported, if required, to tools such as MS Excel for further processing.

The tables below describe the information provided by those files.

In addition to the above files, **vcpu_scope_metadata.json**, a JSON format file with the same information is provided.

Table 4.9: TDVPS Table Description

Column	Description
TDX_FEATURES Enum. Bits	The set of TDX_FEATURES field bits, readable by TD*.SYS.RD*, which enumerate support for this field. One or more comma-separated bit numbers may be specified. If the value of any of those bits is, the field is supported. The special value "Always" means that the field is always supported. The special value "None" means that there is no enumeration for the support of this field. This is only used for fields that are accessible only for debuggable TDs.
Class	Field class, see above for details
Field	Field name
Description	Field description
Type	Field type
VM Applic.	For field arrays where each entry is associated with a VM, this column specifies VM applicability: • L1_AND_L2 • L1_ONLY • L2_ONLY

Column	Description
Init Value	Initial value
Field Size (Bytes)	Field size
Max Num Fields	Maximum number of fields in an array. The description text specified how the actual number of fields in enumerated. A value of "None" indicates that no maximum number is specified.
Num Elem.	Number of elements within each field
Elem. Size (Bytes)	Size of each element
Base FIELD_ID (Hex)	Base FIELD_ID
VMM Access Prod.	Host VMM access for production TDs
VMM Access Debug	Host VMM access for debuggable TDs
Guest Access	Guest TD access
VMM Wr Mask Prod.	Host VMM write mask for production TDs A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.
VMM Wr Mask Debug	Host VMM write mask for debuggable TDs A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.
Guest Wr Mask	Guest TD write mask A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.

4.2.2.2. TDVPS.PIDPT_INDEX[4]

Unreleased Feature: This section is related to Enhanced Interrupt Virtualization, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

PIDPT_INDEX is an array of 4 per-VM indices to the PIDPT entry.

- Legal values must be smaller than TDCS.PIDPT_NUM_ENTRIES.
- Index should be unique, but the TDX Module does not enforce that.
- Default value is -1, indicating a null PIDPT_INDEX; IPI to this VCPU is not enabled.

Description

L1 calls TDG.VP.WR(PIDPT_INDEX[VM]) to notify the TDX Module about the PIDPT_INDEX of the current VPCU for the requested VM. The meaning of PIDPT_INDEX is up to L1:

- For L1, it is typically either be the VCPU_INDEX (which is the default) or the virtual x2APIC_ID value
- For L2, it is typically the virtual x2APIC_ID value, same as set by L1 in the L2's Virtual APIC page

The TDX Module checks that the value is < TDCS.PIDPT_NUM_ENTRIES[VM], but doesn't check for duplicates or correctness. Note that PIDPT_NUM_ENTRIES is 0 if PIDPT is not configured.

Details

- On import, if TDVPS.PIDPT_NUM_ENTIRES[VM]
 - This is the import case where IPI was not enabled for this VM, so no PIDPT entries were configured. PIDPT_INDEX must be -1 (null PIDPT_INDEX).

If passed:

2. Check that value is < TDVPS.PIDPT_NUM_ENTIRES[VM]. If failed, abort with a TDX_METADATA_FIELD_VALUE_NOT_VALID error.
3. Set the TDVPS.SEC_PID[VM].NV to the value of TDCS.MAIN_NV[VM].
4. Atomically update the PIDPT entry to point to the Secure PID.

4.2.2.3. TDVPS.VCPU_STATE_DETAILS

VCPU_STATE_DETAILS is a 64-bit field that is composed of 4-bit sets. Within each set, state information is provided for L1 (VM 0) and L2 (VMs 1 through 3).

Table 4.10: TDVPS.VCPU_STATE_DETAILS

Bits	Name	Description	Details	TDX_FEATURES0 Enumeration Bit	TDH.VP.ENTER IMM_RESUME_HINT Output Flag
3:0	VINTR_PENDING[3:0]	Virtual interrupt was pending at VM exit time	VMCS.RVI[7:4] > VAPIC.VPPR[7:4]	ENHANCED_INTR_STATE (bit 40). Bit 0 (for L1) is always available	Configurable by the host VMM using TDCS.VM_CTL.S. HINT_ON_VINTR_PENDING
7:4	VINTR_IN_SERVICE[3:0]	Virtual interrupt was in service at VM exit time	VMCS.SVI > 30	ENHANCED_INTR_STATE (bit 40)	Configurable by the host VMM using TDCS.VM_CTL.S. HINT_ON_VINTR_IN_SERVICE
11:8	VNMI_PENDING[3:0]	Virtual NMI is pending	Indicates that TDVPS.PEND_NMI, set by the host VMM, is not 0	ENHANCED_INTR_STATE (bit 40). Only bit 8 (for L1) is available. Bits 11:9 are reserved (0).	Configurable by the host VMM using TDCS.VM_CTL.S. HINT_ON_VNMI_PENDING
15:12	ON_SET[3:0]	Outstanding interrupt notification is set	Secure PID's ON bit is set. See below for details.	ENHANCED_INTR_VIRTUALIZATION (Bit 45)	Enabled if enhanced interrupt virtualization has been configured (per VM) by TDH.INTR.CONFIG
Other	RESERVED	Set to 0			

10

4.2.2.3.1. ON_SET Details

The state of the ON bit of Regular and/or Shared PIDs in shared memory is not provided; the host VMM can access such PIDs directly.

Note that in some cases the TDX Module processes and merges the PID in shared memory into the Secure PID held in TDVPS – even if Secure PID is not enabled. In such cases, the ON bit of such PIDs is cleared; however, Secure PID's ON bit is set and indicated by the VCPU_STATE_DETAILS.ON_SET.

4.2.3. TD (L1) VMCS and L2 VMCS

Intel SDM, Vol. 3, 24 Virtual Machine Control Structures

Note: This section describes VMCS usage, as defined. Implementation may differ.

TD (L1) VMCS and L2 VMCS are VMX-format VMCS (with TDX ISA extensions) that are stored as part of TDVPS.

4.2.3.1. Common to TD and L2 VMCS

4.2.3.1.1. TD and L2 VMCS Description Files

Most VMCS fields information is provided in separate files:

- **td_vmcs.pdf** and **l2_vmcs.pdf** provide human-readable VMCS tables.

- **td_vmcs.csv** and **l2_vmcs.csv** provide the same tables in a Comma-Separated Values (CSV) format. These files can be imported, if required, to tools such as MS Excel for further processing.

The tables below describe the information provided by those files.

In addition to the above files, **td_vmcs.json** and **l2_vmcs.json**, JSON format files with the same information are provided.

Table 4.11: TD and L2 VMCS Table Description

Column	Description
Sub-Class	Field class
Field	Field name
Description	Field description
Init Value	Initial value
Field Size (Bytes)	Field size
Num Fields	Number of fields in an array
Base FIELD_ID (Hex)	Base FIELD_ID
VMM Access Prod.	Host VMM access for production TDs
VMM Access Debug	Host VMM access for debuggable TDs
L1 Access	For L2 VMCS, this field describes L1 access
VMM Wr Mask Prod.	Host VMM write mask for production TDs A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.
VMM Wr Mask Debug	Host VMM write mask for debuggable TDs A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.
L1 Wr Mask	L1 write mask (L2 VMCS only) A bit value of 1 indicates that the corresponding field bit is writable. However, actual writability may be subject to supported features and configuration, as described in other places in this document.

4.2.3.2. TD (L1) VMCS

4.2.3.2.1. TD VMCS CR4 Guest/Host Mask

Table 4.12: TD VMCS CR4 Guest/Host Mask

Bit	Name	Value	Description
6	MCE	1	Owned by the Intel TDX Module
13	VMXE	1	Owned by the Intel TDX Module
14	SMXE	1	Owned by the Intel TDX Module
22	PKE	~TDCS.XFAM[9]	Intercept writes to CR4 if PK is not enabled
24	PKS	~TDCS.ATTRIBUTES.PKS	Intercept writes to CR4 if PKS is not enabled
25	UINTR	~TDCS.XFAM[14]	Intercept writes to CR4 if ULI is not enabled
27	LASS	~TDCS.ATTRIBUTES.LASS	Intercept writes to CR4 if LASS is not enabled
32	FRED	~virt. CPUID(0x7,1).EAX[17]	Intercept writes to CR4 if FRED is not enabled

Bit	Name	Value	Description
			Applicable to TDX Modules which support FRED.
	Any bit set to 1 in IA32_VMX_CR4_FIXED0 (i.e., a bit whose value must be 1)	1	Intercept writes of illegal values to CR4
	Any bit set to 0 in IA32_VMX_CR4_FIXED1 (i.e., a bit whose value must be 0)	1	Intercept writes of illegal values to CR4
	Bits known to the Intel TDX Module as reserved (bits 63:33, 31:29, 26 and bit 15)	1	Intercept writes of illegal values to CR4
	Other bits	0	

Note: In the past, bit 19 was called KL, and was set to `~TDCS.ATTRIBUTES.KL` in order to intercept writes to CR4 if KeyLocker is not enabled. However, the KL CPU feature is deprecated.

5. Interface Functions

5.1. How to Read the Interface Function Definitions

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

- 5 A table of operands is provided for any function that has explicit and/or implicit memory operands or implicit resources. Table 5.1 below describes how to read it. Most of the background is detailed in the [TDX Module Base Spec].

Table 5.1: How to Read the Operands Information Tables

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Alignment Check	Concurrency Restrictions		
								Resource	Contain. 2MB	Contain. 1GB
The operand may be specified explicitly or may be implicit	Register used as a pointer to the operand	How the operand is referenced: HPA, GPA, GPA and level or index	Resource (memory or CPU internal) for this operand	Data type of the resource, as defined in Chapter 3 or Chapter 4	Type of memory or resource access: R, RW, or Ref	Shared, Private, Opaque or Hidden	Required alignment of the operand	Concurrency restrictions are described in the [TDX Module Base Spec]. For explicit memory accesses using HPA, there are additional concurrency restrictions on the 1GB and 2MB blocks that contain the accessed HPA. For other types of accesses, only the operand concurrency is applicable. Shared(h) and Exclusive(h) indicate shared access with host-side priority. Sh./Ex.(h) indicates either shared or exclusive access with host-side priority, depending on the platform type - On platforms which do not use ACT, access is shared. - On platforms which use ACT, access is exclusive. Shared(i) and Exclusive(i) indicate that the resource is implicitly restricted.		

5.2. Reserved Leaf Numbers

- 10 The following SEAMCALL and TDCALL leaf number ranges are reserved and will never be used by production TDX Modules:

0x00F0 - 0x00FF: Range reserved for debug builds of the TDX Module

0xF000 - 0xFFFF: Range reserved for debug builds of the TDX Module

0xE000 - 0xEFFF: Range reserved for software use, will never be used by the TDX Module

Other: Ranges available for SEAMCALL and TDCALL leaf assignments

15 5.3. Common Algorithms Used by Multiple Interface Functions

This section describes common algorithms that are used by multiple interface functions.

5.3.1. VCPU Association with an LP

The following algorithm is used for associating the current VCPU with the current LP. It is used with VCPU-specific host-side interface functions such as TDH.VP.ENTER, TDH.VP.RD etc.

1. Check that the VCPU has been initialized and is not being torn down.
2. Atomically check that the VCPU is not associated with another LP and associate it with the current LP.
3. If this is a new association, and the TD's ephemeral HKID has changed since the last association, update all TD VMCS physical pointers and the TD HKID execution control.
4. Update the TD VMCS host state fields with any Intel TDX Module LP-specific values.

5.4. Host-Side (SEAMCALL) Interface Functions

The SEAMCALL instruction enters the Intel TDX Module. It is designed to call host-side Intel TDX functions, either local or a TD entry to a guest TD, as selected by RAX.

5.4.1. SEAMCALL Instruction (Common)

This section describes the common functionality of SEAMCALL. Leaf functions are described in the following sections.

Table 5.2: SEAMCALL Input Operands Definition

Parameter	Description		
RAX	Leaf and version numbers, as defined in the [TDX Module Base Spec]. See Table 5.4 below for SEAMCALL leaf numbers.		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function
	23:16	Version Number	Selects the SEAMCALL interface function version
	63:24	Reserved	Must be 0
Other	See individual SEAMCALL leaf functions.		

Table 5.3: SEAMCALL Output Operands Definition

Parameter	Description
RAX	If SEAMCALL failed with VMfailInvalid condition (RFLAGS.CF is 1), then RAX is unmodified. Else, if on input RAX bit 63 was 1, then the SEAMCALL leaf function has been processed by the P-SEAMLDR. Refer to the [TDX Loader Spec] for details. Else, RAX contains the leaf function status return code, indicating the outcome of execution of the SEAMCALL leaf function. See the [TDX Module Base Spec] for details
Other	See individual SEAMCALL leaf functions.

The table below summarizes the host-side interface functions leaf numbers. Note the following:

- For support of specific interface functions by specific TDX Module releases, see the detailed description of each function.
- TDX Connect interface function leaf numbers are defined in the [TDX Connect ABI Spec].

Table 5.4: SEAMCALL Instruction Leaf Numbers Definition

Leaf #	Interface Function Name	Description
0	TDH.VP.ENTER	Enter TDX non-root operation
1	TDH.MNG.ADDCX	Add a control structure page to a TD

Leaf #	Interface Function Name	Description
2	TDH.MEM.PAGE.ADD	Add a 4KB private page to a TD during TD build time
3	TDH.MEM.SEPT.ADD	Add and map a 4KB Secure EPT page to a TD
4	TDH.VP.ADDCX	Add a control structure page to a TD VCPU
5	TDH.MEM.PAGE.RELOCATE	Relocate a 4KB mapped page from its HPA to another
6	TDH.MEM.PAGE.AUG	Dynamically add a 4KB private page to an initialized TD
7	TDH.MEM.RANGE.BLOCK	Block a TD private GPA range
8	TDH.MNG.KEY.CONFIG	Configure the TD private key on a single package
9	TDH.MNG.CREATE	Create a guest TD and its TDR root page
10	TDH.VP.CREATE	Create a guest TD VCPU and its TDVPR root page
11	TDH.MNG.RD	Read TD metadata
12	TDH.MEM.RD	Read from private memory of a debuggable guest TD
13	TDH.MNG.WR	Write TD metadata
14	TDH.MEM.WR	Write to private memory of a debuggable guest TD
15	TDH.MEM.PAGE.DEMOTE	Split a 2MB or a 1GB private TD page mapping into 512 4KB or 2MB page mappings respectively
16	TDH.MR.EXTEND	Extend the guest TD measurement register during TD build
17	TDH.MR.FINALIZE	Finalize the guest TD measurement register
18	TDH.VP.FLUSH	Flush the address translation caches and cached TD VMCS associated with a TD VCPU
19	TDH.MNG.VPFLUSHDONE	Check all of a guest TD's VCPUs have been flushed by TDH.VP.FLUSH
20	TDH.MNG.KEY.FREEID	Mark the guest TD's HKID as free
21	TDH.MNG.INIT	Initialize per-TD control structures
22	TDH.VP.INIT	Initialize the per-VCPU control structures
23	TDH.MEM.PAGE.PROMOTE	Merge 512 consecutive 4KB or 2MB private TD page mappings into one 2MB or 1GB page mapping respectively
24	TDH.PHYMEM.PAGE.RDM	Read the metadata of a page in a TDMR
25	TDH.MEM.SEPT.RD	Read a Secure EPT entry
26	TDH.VP.RD	Read VCPU metadata
28	TDH.PHYMEM.PAGE.RECLAIM	Reclaim a physical memory page owned by a TD (i.e., TD private page, Secure EPT page or a control structure page)
29	TDH.MEM.PAGE.REMOVE	Remove a private page from a guest TD
30	TDH.MEM.SEPT.REMOVE	Remove a Secure EPT page from a TD
31	TDH.SYS.KEY.CONFIG	Configure the Intel TDX global private key on the current package
32	TDH.SYS.INFO	Get Intel TDX Module information
33	TDH.SYS.INIT	Globally initialize the Intel TDX Module
34	TDH.SYS.RD	Read a TDX Module global-scope metadata field
35	TDH.SYS.LP.INIT	Initialize the Intel TDX Module per logical processor
36	TDH.SYS.TDMR.INIT	Partially initialize a Trust Domain Memory Region (TDMR)
37	TDH.SYS.RDALL	Read all host-readable TDX Module global-scope metadata fields
38	TDH.MEM.TRACK	Increment the TD's TLB tracking counter
39	TDH.MEM.RANGE.UNBLOCK	Remove the blocking of a TD private GPA range
40	TDH.PHYMEM.CACHE.WB	Write back the contents of the cache on a WBINVD domain
41	TDH.PHYMEM.PAGE.WBINVD	Write back and invalidate all cache lines associated with the specified memory page and HKID
42	TDH.SYS.RDM	Read multiple TDX Module global-scope metadata fields
43	TDH.VP.WR	Write VCPU metadata
45	TDH.SYS.CONFIG	Globally configure the Intel TDX Module
46	TDH.MNG.RDM	Read multiple TD-scope metadata fields
47	TDH.MNG.WRM	Write multiple TD-scope metadata fields
48	TDH.SERVTD.BIND	Bind a service TD to a target TD
49	TDH.SERVTD.PREBIND	Pre-bind a service TD to a target TD
50	TDH.VP.RDM	Read multiple VCPU-scope metadata fields

Leaf #	Interface Function Name	Description
51	TDH.VP.WRM	Write multiple VCPU-scope metadata fields
52	TDH.SYS.SHUTDOWN	Shutdown the Intel TDX Module and prepare handoff data
53	TDH.SYS.UPDATE	Populate Intel TDX Module state from handoff data
54	TDH.SYS.S4_END	End S4 resume session
58	TDH.PHYMEM.PAMT.ADD	Add a pair of PAMT pages
59	TDH.PHYMEM.PAMT.REMOVE	Remove a pair of PAMT pages
60	TDH.EXT.INIT	Initialize the TDX Module extensions
61	TDH.EXT.MEM.ADD	Add up to 512 4KB memory pages to the TDX Module's memory pool
64	TDH.EXPORT.ABORT	Abort an export session
65	TDH.EXPORT.BLOCKW	Block a TD private page for writing
66	TDH.EXPORT.RESTORE	Restore a list of TD private 4KB pages' Secure EPT entry states after an export abort
68	TDH.EXPORT.MEM	Export a list of TD private pages contents and/or cancellation requests
70	TDH.EXPORT.PAUSE	Pause the exported TD
71	TDH.EXPORT.TRACK	End the current in-order export phase epoch and either start a new epoch or start the out-of-order export phase
72	TDH.EXPORT.STATE.IMMUTABLE	Start an export session and export the TD's immutable state
73	TDH.EXPORT.STATE.TD	Export the TD's mutable state
74	TDH.EXPORT.STATE.VP	Export a VCPU mutable state
75	TDH.EXPORT.UNBLOCKW	Unblock a page that has been blocked for writing
80	TDH.IMPORT.ABORT	Abort an import session
81	TDH.IMPORT.END	End an import session
82	TDH.IMPORT.COMMIT	Commit the import session and allow the imported TD to run
83	TDH.IMPORT.MEM	Import a list of TD private pages contents and/or cancellation requests based on a migration bundle in shared memory
84	TDH.IMPORT.TRACK	End the current in-order import phase epoch and either start a new epoch or start the out-of-order import phase
85	TDH.IMPORT.STATE.IMMUTABLE	Start an import session and import the TD's immutable state
86	TDH.IMPORT.STATE.TD	Import the TD's mutable state
87	TDH.IMPORT.STATE.VP	Import a VCPU mutable state
96	TDH.MIG.STREAM.CREATE	Create a migration stream
163	TDH.MEM.SHARED.SEPT.WR	Map/un-map shared EPT root table entries used to support trusted DMA access to TD shared GPA space.

5.4.1.1. Instruction Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

- 5 The SEAMCALL instruction itself is specified in the [TDX Arch Extensions Spec]. There are multiple cases where SEAMCALL may fail. Failures may result in an exception (#UD, #GP(0)) or a VMfailInvalid condition (CF is set to 1). Failure cases include, among others, the following:

- CPU mode is incorrect
- TDX Module has not been loaded
- 10 • TDX Module has been disabled

If RAX bit 63 is 1, then the SEAMCALL leaf function is processed by the P-SEAMLDR. Refer to the [TDX Loader Spec] for details.

On entry, the Intel TDX Module performs the checks listed below at a high level. Errors cause a SEAMRET with RAX set to the proper completion status code.

- 15
1. The leaf number in RAX is supported by the Intel TDX Module.
 2. If the Intel TDX Module's state is SYS_DISABLE, only the TDH.SYS.DISABLE leaf function is allowed.

3. Else, if the Intel TDX Module's state is not `SYS_READY`, only `TDH.SYS.RD*`, `TDH.SYS.INFO`, `TDH.SYS.INIT`, `TDH.SYS.LP.INIT`, `TDH.SYS.CONFIG`, `TDH.SYS.KEY.CONFIG` and `TDH.SYS.SHUTDOWN` leaf functions are allowed. Those leaf functions then perform other initialization state checks.

If all checks pass, the Intel TDX Module calls the leaf function according to the leaf number in `RAX`. See the following sections for individual leaf function details.

5.4.1.2. Completion Status Codes

Table 5.5: SEAMCALL Completion Status Codes (Returned in `RAX`) Definition

Completion Status Code	Description
<code>TDX_SUCCESS</code>	SEAMCALL is successful.
<code>TDX_SYS_SHUTDOWN</code>	
Other	See individual leaf functions.

5.4.2. TDH.EXPORT.ABORT Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 TDH.EXPORT.ABORT aborts an export session and allows the source TD to resume normal operation, depending on export state and an abort token received from the destination platform.

5.4.2.1. Input Operands

Table 5.6: TDH.EXPORT.ABORT Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 64
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	HPA of the source TD's TDR page (HKID bits must be 0)		
R8	If an abort token is available, R8 provides the HPA and size of memory of an MBMD structure in memory, as described below. Otherwise, R8's value must be 0.		
	Bits	Name	Description
	51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
	63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R10	Migration stream index:		
	Bits	Name	Description
	15:0	MIGS_INDEX	Migration stream index – must be 0
	63:16	RESERVED	Reserved: must be 0

10 5.4.2.2. Output Operands

Table 5.7: TDH.EXPORT.ABORT Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1
Other	Unmodified

5.4.2.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.2.3.1. Overview

- 5 TDH.EXPORT.ABORT aborts an export session. If successful, i.e., the target TD does not run, the source TD becomes runnable. If called during the out-of-order phase, an abort token received from the destination platform is required.

If the TDX module is configured for non-blocking export, TDH.EXPORT.ABORT resets the internal state held by the TDX module for comprehensive memory scans of the specified TD's GPA address space.

5.4.2.3.2. Enumeration

- 10 Availability of TDH.EXPORT.ABORT is enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.EXPORT.ABORT returns a TDX_OPERAND_INVALID(RAX) status.

5.4.2.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

15 **Table 5.8: TDH.EXPORT.ABORT Operands Information Definition**

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	R8	HPA	MBMD buffer	MBMD	R	Shared	128B	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	Comprehensive scan state	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	All comprehensive scan contexts	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.2.5. Completion Status Codes

Table 5.9: TDH.EXPORT.ABORT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCORRECT_MBMD_MAC	
TDX_INVALID_MBMD	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	

Completion Status Code	Description
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.3. TDH.EXPORT.BLOCKW Leaf

Block a list of TD private 4KB pages for writing and for attributes modification.

5.4.3.1. Input Operands

Table 5.10: TDH.EXPORT.BLOCKW Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 65
		23:16	Version Number	Selects the SEAMCALL interface function version Version may be 0 or 1. See enumeration details below.
		63:24	Reserved	Must be 0
RCX	GPA_LIST_INFO	GPA_LIST_INFO: HPA of a GPA list page in shared memory, and first and last entries to process, as defined in 3.13.2 FORMAT must be GPA_ONLY.		
RDX	TDR	HPA of the source TD's TDR page (HKID bits must be 0)		

5.4.3.2. Output Operands

Table 5.11: TDH.EXPORT.BLOCKW Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	GPA_LIST_INFO	Same as the input value, except that FIRST_ENTRY is updated to the index of the next entry to be processed. If all entries have been processed, FIRST_ENTRY is updated to (LAST_ENTRY + 1) Modulo 512.
R8	LIST_ERR_COUNT	If TDH.EXPORT.BLOCKW was called with version 1 or higher, R8 returns the number of GPA list entries where an error was encountered. Else, R8 is unmodified.
Other		Unmodified

5.4.3.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.3.3.1. Overview

For each 4KB page in the GPA list, if a blocking operation has been requested, TDH.EXPORT.BLOCKW finds the Secure EPT entry for the provided page. If the entry state is correct (MAPPED, PENDING, EXPORTED_DIRTY or PENDING_EXPORTED_DIRTY), TDH.EXPORT.BLOCKW blocks it for writing, by saving and clearing the W bit and setting the Secure EPT entry state (to BLOCKEDW, PENDING_BLOCKEDW, EXPORTED_DIRTY_BLOCKEDW or PENDING_EXPORTED_DIRTY_BLOCKEDW respectively). It records the current TD's TLB epoch in the TD's global

BW_EPOCH and marks the GPA list entry as ready for export. If the TD is partitioned, TDH.EXPORT.BLOCKW also blocks any L2 SEPT entries mapping the 4KB page.

5.4.3.3.2. Enumeration

Availability of TDH.EXPORT.BLOCKW is enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.EXPORT.BLOCKW returns a TDX_OPERAND_INVALID(RAX) status.

Support of TDH.EXPORT.BLOCKW version 1 or higher is enumerated by TDX_FEATURES0.LIST_ERROR_COUNT (bit 54).

5.4.3.3.3. Export Mode

TDH.EXPORT.BLOCKW is only available if the TDX module is configured for write-blocking based export (the default). If not available, calling TDH.EXPORT.BLOCKW returns a TDX_OPERAND_INVALID(RAX) status.

5.4.3.3.4. GPA List Entry Error Handling

If a page can't be blocked for writing, TDH.EXPORT.BLOCKW marks its GPA list entry as unsuccessful. List processing is not aborted; it continues to the next entry, if applicable.

Note: Skipping a GPA list entry whose OPERATION is NOP is not considered an error. The STATUS field is written as SKIPPED.

If TDH.EXPORT.BLOCKW was called with version 1 or higher, R8 returns the number of GPA list entries where an error was encountered. Else, R8 is unmodified.

5.4.3.3.5. Interruptibility

TDH.EXPORT.BLOCKW is interruptible. If a pending interrupt is detected during operation, TDH.EXPORT.BLOCKW returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. RCX is updated with the next list entry index to process, so the host VMM may re-invoke TDH.EXPORT.BLOCKW immediately after handling the interrupt.

5.4.3.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.12: TDH.EXPORT.BLOCKW Memory Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	GPA List page	GPA_LIST	RW	Shared	4KB	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	N/A	GPA	TD private pages (via GPA list)	Block	None	Private	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	None	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.3.5. Completion Status Codes

Table 5.13: TDH.EXPORT.BLOCKW Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	The operation is successful. Note: Processing of some GPA list entries may have encountered errors, but this did not cause an abort of the overall operation. The number of such errors is reported in the lower 32 bits of the completion status.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.4. TDH.EXPORT.MEM Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 TDH.EXPORT.MEM exports a list of TD private pages contents and/or cancellation requests and prepares a migration bundle in shared memory.

5.4.4.1. Input Operands

Table 5.14: TDH.EXPORT.MEM Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 68
		23:16	Version Number	Selects the SEAMCALL interface function version Version may be 0 or 1. See enumeration details below.
		63:24	Reserved	Must be 0
RCX	GPA_LIST_INFO	HPA of a GPA list page in shared memory, and first and last entries to process, as defined in 3.13.2 On a new invocation, FIRST_ENTRY must be 0. On a resumed invocation, FIRST_ENTRY must be the index of the next GPA list entry to export.		
RDX	TDR	HPA of the source TD's TDR page (HKID bits must be 0)		
R8	MBMD	HPA and size of memory of a memory buffer to use for MBMD:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	MIG_BUFF_LIST	HPA (including HKID bits) of a migration buffer list in shared memory, corresponding to the GPA list pointed by RCX – see 3.13.3.		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index If N migration streams have been created by TDH.MIG.STREAM.CREATE, then MIGS_INDEX must be lower than N-1.
		62:16	RESERVED	Reserved: must be 0
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

Operand	Name	Description
R11	MAC_LIST_0	HPA (including HKID bits) of a MAC list in shared memory, corresponding to the first 256 entries of the GPA list pointed by RCX – see 3.13.3. If GPA_LIST_INFO.FIRST_ENTRY >= 256, then MAC_LIST_0 is ignored.
R12	MAC_LIST_1	HPA (including HKID bits) of a MAC list in shared memory, corresponding to the last 256 entries of the GPA list pointed by RCX – see 3.13.3. If GPA_LIST_INFO.LAST_ENTRY < 256, then MAC_LIST_1 is ignored.
R14	ATTRIB_LIST	If GPA_LIST_INFO.FORMAT is GPA_AND_L2_ATTR, then R14 contains the HPA (including HKID bits) of a page attributes list in shared memory – see 3.13.4. Else, R14 is ignored. An ATTRIB_LIST is mandatory for exporting partitioned TDs (which contain one or more L2 VMs). Enumeration: Support of this feature is enumerated by TDX_FEATURES0.PARTITIONED_TD_MIGRATION, readable by TDH.SYS.RD* (see 3.3.3.1).

5.4.4.2. Output Operands

Table 5.15: TDH.EXPORT.MEM Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	GPA_LIST_INFO	Same as the input value, except that FIRST_ENTRY is updated to the index of the next entry to be processed. If all entries have been processed, FIRST_ENTRY is updated to (LAST_ENTRY + 1) Modulo 512.
RDX	NUM_EXPORTED	If TDH.EXPORT.MEM is successful, RDX returns the number of exported 4KB migration buffers, including: - The GPA list page - Attributes list page (if GPA_LIST_INFO.FORMAT is GPA_AND_L2_ATTR) - One or two MAC pages (depending on GPA_LIST_INFO.FIRST_ENTRY and GPA_LIST_INFO.LAST_ENTRY) - Up to 512 encrypted memory pages. Only the pages where actual data is exported are counted. See 5.4.4.3.5 below for details. If TDH.EXPORT.MEM is not successful, RDX is unmodified.
R8	LIST_ERR_COUNT	If TDH.EXPORT.MEM was called with version 1 or higher, R8 returns the number of GPA list entries where an error was encountered. Else, R8 is unmodified.
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.4.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.4.3.1. Overview

- 5 TDH.EXPORT.MEM exports a list of up to 512 TD private 4KB pages as a migration bundle, which includes an MBMD, set of 4KB pages encrypted with the migration session key, a 4KB page containing the GPA list, an optional 4KB page containing attributes list, and two 4KB pages containing page MACs.

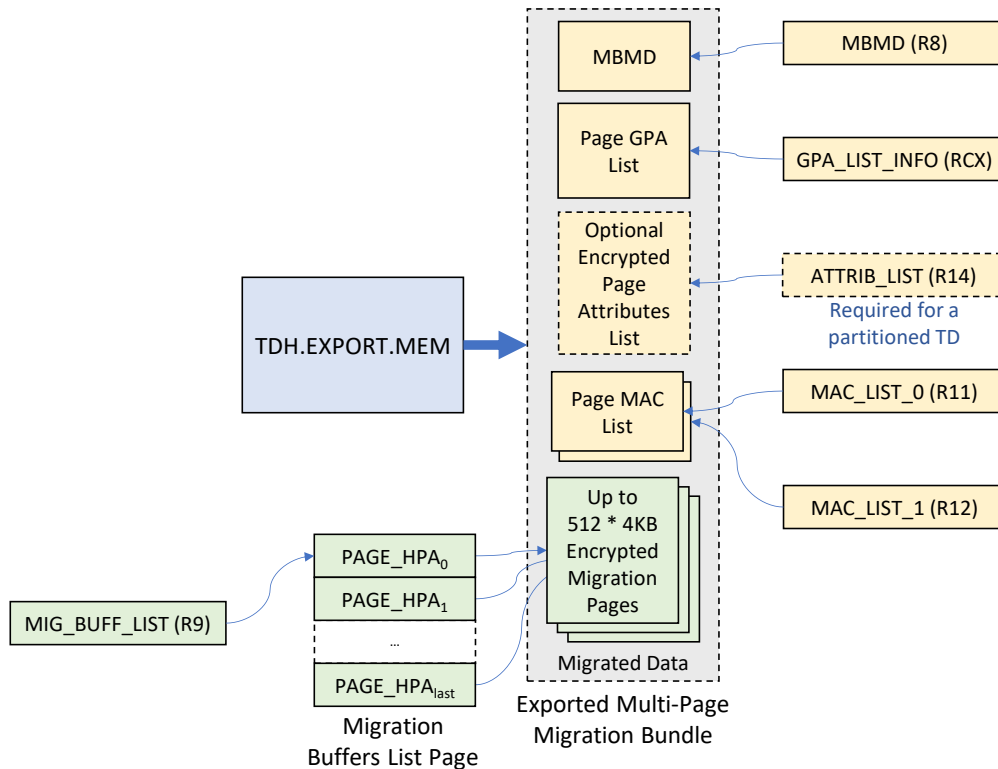


Figure 5.1: TDH.IMPORT.MEM Inputs and Outputs

- 10 Entries in the Page GPA List (pointed by RCX), Page Attributes List (pointed by R14), Page MAC List (pointed by R11 and R12) and Migration Buffers List (pointed by R9) are sorted in the same order. I.e., entry N in each of those lists applies to the same exported page.

5.4.4.3.2. Enumeration

- 15 Availability of TDH.EXPORT.MEM is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.EXPORT.MEM returns a TDX_OPERAND_INVALID(RAX) status.

TDX_FEATURES0.PARTITIONED_TD_MIGRATION (bit 21) enumerates TDX Module support of migrating partitioned TDs (which contain one or more L2 VMs).

- 20 Interruption due to yielding to concurrent functions that try to acquire an exclusive lock on the SEPT trees (see below) is supported if TDX_FEATURES0.NON_BLOCKING_EXPORT (bit 41) is set to 1.

Support of TDH.EXPORT.MEM version 1 or higher is enumerated by TDX_FEATURES0.LIST_ERROR_COUNT (bit 54).

5.4.4.3.3. GPA List

A GPA list is provided as an input and is updated by TDH.EXPORT.MEM. The GPA list format is described in 3.13.2. Only 4KB pages are supported.

- 25 For write-blocking based export, the requested operation for each page in the list may be one of the following:

MIGRATE: Export the page. TDH.EXPORT.MEM decides, based on the SEPT entry state, whether the operation is an export or a re-export of a previously exported page. Note that the MIGRATE operation request is represented by two possible values.

CANCEL: Cancel a previous page export.

NOP: No operation.

For non-blocking export, the requested operation for each page in the list may be one of the following:

EXPORT: Export the page. TDH.EXPORT.MEM decides, based on the SEPT entry state, whether the operation is export, re-export of a previously exported page, or cancellation of a previous export.

NOP: No operation. Note that the NOP operation request is represented by three possible values.

TDH.EXPORT.MEM updates the GPA list with the actual OPERATION code (MIGRATE, REMIGRATE, CANCEL or NOP) and STATUS; the host VMM is expected to send the GPA list as part of the migration bundle, to be imported on the destination platform by TDH.IMPORT.MEM.

5.4.4.3.4. S4 Hibernation

If TDH.EXPORT.MEM is called as part of an S4 hibernation, it only supports write-blocking based export (though no write blocking is actually required) and the out-of-order export phase. As a result, the GPA list may not contain a CANCEL operation. In addition, blocking and TLB tracking is not required.

5.4.4.3.5. Migration Buffers List

A list of 4KB page buffers is provided as an input and is updated by TDH.EXPORT.MEM. In case no data is exported (PENDING page, page cancellation or some state error) TDH.EXPORT.MEM marks the applicable list entry as invalid. Such cases are not included in the NUM_EXPORTED output operand.

5.4.4.3.6. Write-Blocking and TLB Tracking (Write-Blocking based Export)

The following applies if the TDX module is configured for write-blocking based export:

If the TD may be running, the exported pages must be blocked for writing by TDH.EXPORT.BLOCKW and TLB tracked (TDH.MEM.TRACK followed by IPI to all the LPs running the TD VCPUs) to be exported. Unlike memory management operations such as TDH.MEM.PAGE.REMOVE, the TLB tracking is not page-specific; it should be done after the last TDH.EXPORT.BLOCKW of any page has been called for the current export round.

Else (e.g., the TD has been paused for export), no blocking and tracking is required.

5.4.4.3.7. Scanning and TLB Tracking (Non-Blocking Export)

The following applies if the TDX module is configured for non-blocking export:

If the TD may be running, the exported pages must have been scanned by TDH.MEM.SCAN(DSCAN) and TLB tracked to be exported. Unlike write-blocking based export, TLB tracking is page-specific, allowing TDH.MEM.SCAN(DSCAN) to run concurrently with TDH.EXPORT.MEM. For more information on TLB tracking, see the [TD Migration Spec].

Else (e.g., the TD has been paused for export), no tracking is required.

5.4.4.3.8. GPA List Entry Error Handling

If a page can't be exported for a reason that is specific to that page, TDH.EXPORT.MEM marks its GPA list entry as unsuccessful, but does not abort. It continues to the next entry, if applicable.

Note: Skipping a GPA list entry whose OPERATION is NOP is not considered an error. The STATUS field is written as SKIPPED.

If TDH.EXPORT.MEM was called with version 1 or higher, R8 returns the number of GPA list entries where an error was encountered since it was last invoked, either as a new invocation or as a resumption of a previously interrupted operation. Else, R8 is unmodified.

5.4.4.3.9. Concurrency

TDH.EXPORT.MEM may be called concurrently on multiple LPs (each specifying a separate migration stream) and may run concurrently with other functions (e.g., TDH.MEM.SCAN.*).

SEPT Tree Concurrency

TDH.EXPORT.MEM acquires a shared lock on the SEPT trees, to prevent blocking or changes to the tree structure (e.g., by TDH.MEM.RANGE.BLOCK or TDH.MEM.SEPT.REMOVE) while it runs. If supported, TDH.EXPORT.MEM may prevent starvation of concurrent memory management functions by detecting that they failed to acquire an exclusive lock on the

SEPT trees. In this case, TDH.EXPORT.MEM yields and returns with a TDX_INTERRUPTED_BUSY status in RAX. The host VMM is expected to resume TDH.EXPORT.MEM. See the discussion on interruptibility below.

SEPT Entry Concurrency

Failure to acquire a lock on an SEPT entry is handled as a page-specific error, as described above. TDH.EXPORT.MEM skips the busy page.

5.4.4.3.10. Interruption and Resumption

TDH.EXPORT.MEM is interruptible. An interruption occurs in the following cases:

- If a pending interrupt is detected during operation, TDH.EXPORT.MEM returns with a TDX_INTERRUPTED_RESUMABLE status in RAX.
- If supported and if TDH.EXPORT.MEM detects that a concurrent function (such as TDH.MEM.PAGE.PROMOTE) has failed to acquire an exclusive lock on the SEPT trees, it may yield and return with a TDX_INTERRUPTED_BUSY status in RAX.

If a pending interrupt is detected during operation, TDH.EXPORT.MEM returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. RCX is updated with the next list entry index to process.

The host VMM should re-invoke TDH.EXPORT.MEM after handling the interrupt, keeping the same inputs (and updated value in RCX) except setting R10.RESUME to 1. If the host VMM cannot resume TDH.EXPORT.MEM for some reason, it should abort the export session (TDH.EXPORT.ABORT). Failing to resume TDH.EXPORT.MEM and to export the generated migration bundle when it completes successfully will result in the migration protocol going out of sync; this will be detected by the destination side, resulting in an import failure.

The host VMM should not transmit the generated migration bundle to the destination side until TDH.EXPORT.MEM is completed successfully. Doing so will result in the migration protocol going out of sync; this will be detected by the destination side, resulting in an import failure.

5.4.4.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.16: TDH.EXPORT.MEM Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	GPA List page	GPA_LIST	RW	Shared	4KB	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	R8	HPA	Memory to use for MBMD	MBMD	RW	Shared	128B	None	None	None
Explicit	R9	HPA	Migration buffer list	PAGE_LIST	RW	Shared	4KB	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	R11	HPA	MAC list page 1	MAC list	RW	Shared	4KB	None	None	None
Explicit	R12	HPA	MAC list page 2	MAC list	RW	Shared	4KB	None	None	None
Explicit	R14	HPA	attributes list page	page attributes	R	Shared	4KB	None	None	None
Explicit	N/A	GPA	TD private pages (via GPA list)	Blob	R	Private	4KB	None	None	None
Explicit	N/A	HPA	Migration buffer pages (via page list)	Blob	RW	Shared	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.4.5. Completion Status Codes

Table 5.17: TDH.EXPORT.MEM Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INTERRUPTED_BUSY	
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_RESUMPTION	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	

Completion Status Code	Description
TDX_SUCCESS	The operation is successful. Note: Processing of some GPA list entries may have encountered errors, but this did not cause an abort of the overall operation. The number of such errors is reported in the lower 32 bits of the completion status.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.5. TDH.EXPORT.PAUSE Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 TDH.EXPORT.PAUSE starts the TDX-enforced blackout period on the source platform, where the source TD is paused.

5.4.5.1. Input Operands

Table 5.18: TDH.EXPORT.PAUSE Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 70
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	HPA of Source TD TDR page (HKID bits must be 0)		

5.4.5.2. Output Operands

10 **Table 5.19: TDH.EXPORT.PAUSE Output Operands Definitions**

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1
Other	Unmodified

5.4.5.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

15 5.4.5.3.1. Overview

TDH.EXPORT.PAUSE pauses the TD and starts the Live Migration Blackout period on the source platform.

- All TD VCPUs have stopped executing.
- No TD-specific SEAMCALL is running.

5.4.5.3.2. Enumeration

- 20 Availability of TDH.EXPORT.PAUSE is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.EXPORT.PAUSE returns a TDX_OPERAND_INVALID(RAX) status.

5.4.5.3.3. Preconditions

TDH.EXPORT.PAUSE checks the following preconditions:

- 25
- An export session must be in progress and must be in the LIVE_EXPORT state.
 - If the TDX module is configured for non-blocking export, no TD private page may be blocked.
 - If the TD is configured for TDX Connect, no TDIs may be bound.

5.4.5.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.20: TDH.EXPORT.PAUSE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS Epoch Tracking Fields	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5

5.4.5.5. Completion Status Codes

Table 5.21: TDH.EXPORT.PAUSE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_BLOCKED_PAGES_EXIST	There are memory pages that have been blocked by TDH.MEM.RANGE.BLOCK. This is not permitted if the TDX module is configured for non-blocking export.
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.6. TDH.EXPORT.RESTORE Leaf

TDH.EXPORT.RESTORE restores a list of TD private 4KB pages' Secure EPT entry states after an export abort.

5.4.6.1. Input Operands

Table 5.22: TDH.EXPORT.RESTORE Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 66
		23:16	Version Number	Selects the SEAMCALL interface function version Version may be 0 or 1. See enumeration details below.
		63:24	Reserved	Must be 0
RCX	GPA_LIST_INFO	GPA_LIST_INFO: HPA of a GPA list page in shared memory, and first and last entries to process, as defined in 3.13.2 FORMAT must be GPA_ONLY.		
RDX	TDR	HPA of the source TD's TDR page (HKID bits must be 0)		

5.4.6.2. Output Operands

Table 5.23: TDH.EXPORT.RESTORE Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	GPA_LIST_INFO	Same as the input value, except that FIRST_ENTRY is updated to the index of the next entry to be processed. If all entries have been processed, FIRST_ENTRY is updated to (LAST_ENTRY + 1) Modulo 512.
R8	LIST_ERR_COUNT	If TDH.EXPORT.RESTORE was called with version 1 or higher, R8 returns the number of GPA list entries where an error was encountered. Else, R8 is unmodified.
Other		Unmodified

5.4.6.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.6.3.1. Overview

TDH.EXPORT.RESTORE restores a list of TD private 4KB pages' Secure EPT entry states after an aborted export session. It reverts each L1 Secure EPT entry and any applicable L2 Secure EPT entries to their original non-exported state.

5.4.6.3.2. Enumeration

Availability of TDH.EXPORT.RESTORE is enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.EXPORT.RESTORE returns a TDX_OPERAND_INVALID(RAX) status.

Support of TDH.EXPORT.RESTORE version 1 or higher is enumerated by TDX_FEATURES0.LIST_ERROR_COUNT (bit 54).

5 5.4.6.3.3. GPA List Entry Error Handling

If a page's Secure EPT entry can't be restored, TDH.EXPORT.RESTORE marks its GPA list entry as unsuccessful. List process is not aborted; it continues to the next entry, if applicable.

Note: Skipping a GPA list entry whose OPERATION is NOP is not considered an error. The STATUS field is written as SKIPPED.

- 10 If TDH.EXPORT.RESTORE was called with version 1 or higher, RDX returns the number of GPA list entries where an error was encountered. Else, RDX is unmodified.

5.4.6.3.4. Interruptibility

TDH.EXPORT.RESTORE is interruptible. If a pending interrupt is detected during operation, TDH.EXPORT.RESTORE returns with a TDX_INTERRUPTED_RSUMABLE status in RAX. RCX is updated with the next list entry index to process, so the host

- 15 VMM may re-invoke TDH.EXPORT.RESTORE immediately after handling the interrupt.

5.4.6.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.24: TDH.EXPORT.RESTORE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	GPA List page	GPA_LIST	RW	Shared	4KB	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	N/A	GPA	TD private pages (via GPA list)	Block	None	Private	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	None	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.6.5. Completion Status Codes

Table 5.25: TDH.EXPORT.RESTORE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INTERRUPTED_RESUMABLE	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	The operation is successful. Note: Processing of some GPA list entries may have encountered errors, but this did not cause an abort of the overall operation. The number of such errors is reported in the lower 32 bits of the completion status.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.7. TDH.EXPORT.STATE.IMMUTABLE Leaf

TDH.EXPORT.STATE.IMMUTABLE starts a new export session and exports the TD's immutable state as a multi-page migration bundle.

TDH.EXPORT.STATE.IMMUTABLE is also used for starting a new S4 hibernation session.

5.4.7.1. Input Operands

Table 5.26: TDH.EXPORT.STATE.IMMUTABLE Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 72
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	TDR	Source TD handle and flags		
		Bits	Name	Description
		0	EXPORT_TYPE	0: TD Export 1: S4 Hibernation
		11:1	Reserved	Must be 0
		51:12	TDR HPA	HPA[51:12] of the source TD's TDR page (HKID bits must be 0)
		63:52	Reserved	Must be 0
R8	MBMD	HPA and size of memory of a memory buffer to use for MBMD:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	PAGE_LIST_INFO	Migration buffers list information – see 3.13.6.1 See enumeration details below.		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index – must be 0
		62:16	RESERVED	Reserved: must be 0

Operand	Name	Description		
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

5.4.7.2. Output Operands

Table 5.27: TDH.EXPORT.STATE.IMMUTABLE Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RDX	NUM_EXPORTED	Number of exported 4KB migration buffers
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.7.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.7.3.1. Overview

TDH.EXPORT.STATE.IMMUTABLE starts a new export session. It exports the TD's immutable state as a migration bundle, which includes an MBMD and a set of 4KB pages, encrypted with the migration session key. The migration bundle is protected by a MAC that is stored in the MBMD.

TDH.EXPORT.STATE.IMMUTABLE is also used for starting a new S4 hibernation session.

5.4.7.3.2. Enumeration

Availability of TDH.EXPORT.STATE.IMMUTABLE is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.EXPORT.STATE.IMMUTABLE returns a TDX_OPERAND_INVALID(RAX) status.

The required number of 4KB pages for exporting the immutable TD state is enumerated by NUM_IMMUTABLE_STATE_PAGES.

5.4.7.3.3. Interruptibility

If a pending interrupt is detected during operation, TDH.EXPORT.STATE.IMMUTABLE returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The host VMM is expected to resume it, by calling it with R10.RESUME set to 1. If the host VMM cannot resume TDH.EXPORT.STATE.IMMUTABLE for some reason, it should abort the export session (TDH.EXPORT.ABORT).

5.4.7.3.4. Aspects of MAC Calculation Compatibility on TDX Module Update

If TDH.EXPORT.STATE.IMMUTABLE was interrupted, and later the TDX Module was updated before TDH.EXPORT.STATE.IMMUTABLE was resumed, there could be incompatibility issues with the format of the intermediate MRTD MAC context, held as part of the migration stream context (MIGSC), between the original and the new TD module.

On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.EXPORT.STATE.IMMUTABLE returns a TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT status. In this case, the host VMM is expected to abort the migration session and may restart it. For details, see the [Base Spec] section titled "Compatibility Aspects of TD-Preserving Update".

If the host VMM did not configure the TDX Module to detect such incompatibility, it will not be detected by TDH.EXPORT.STATE.IMMUTABLE. However, on import, TDH.IMPORT.STATE.IMMUTABLE will detect that the MAC is incorrect and will return a TDX_INCORRECT_MBMD_MAC error.

5.4.7.4. Operands Information

- 5 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.28: TDH.EXPORT.STATE.IMMUTABLE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	R8	HPA	Memory to use for MBMD	MBMD	RW	Shared	128B	None	None	None
Explicit	R9	HPA	Page list	PAGE_LIST	RW	Shared	4KB	None	None	None
Explicit	R10	N/A	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Explicit	N/A	HPA	Destination pages (via page list)	Blob	RW	Shared	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	PL.S4_STATE	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.7.5. Completion Status Codes

10

Table 5.29: TDH.EXPORT.STATE.IMMUTABLE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT	
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_RESUMPTION	
TDX_IOMMU_IOTLB_TRACKING_NOT_DONE	Applicable only if TDX Connect is supported
TDX_MAX_EXPORTS_EXCEEDED	
TDX_METADATA_LIST_OVERFLOW	
TDX_MIGRATION_SESSION_KEY_NOT_SET	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_MIN_MIGS_NOT_CREATED	

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PREVIOUS_EXPORT_CLEANUP_INCOMPLETE	
TDX_RND_NO_ENTROPY	Failed to generate a random migration encryption key. This is typically caused by an entropy error of the CPU's random number generator, and may be impacted by RDSEED, RDRAND or PCONFIG executing on other LPs. The operation should be retried.
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_HAS_ATTACHED_DEVICES	Applicable only if TDX Connect is supported
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TD_NOT_MIGRATABLE	
TDX_TDCS_NOT_ALLOCATED	

5.4.8. TDH.EXPORT.STATE.TD Leaf

TDH.EXPORT.STATE.TD exports a paused TD's mutable state as a multi-page migration bundle.

5.4.8.1. Input Operands

Table 5.30: TDH.EXPORT.STATE.TD Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 73
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	TDR	HPA of the source TD's TDR page (HKID bits must be 0)		
R8	MBMD	HPA and size of memory of a memory buffer to use for MBMD:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	PAGE_LIST_INFO	Migration buffers list information – see 3.13.6.1 See enumeration details below.		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index – must be 0
		62:16	RESERVED	Reserved: must be 0
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

5

5.4.8.2. Output Operands

Table 5.31: TDH.EXPORT.STATE.TD Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RDX	NUM_EXPORTED	Number of exported 4KB migration buffers

Operand	Name	Description
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.8.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.8.3.1. Overview

TDH.EXPORT.STATE.TD exports the TD's mutable state as a migration bundle, which includes an MBMD and a set of 4KB pages, encrypted with the migration session key. The migration bundle is protected by a MAC that is stored in the MBMD. The TD must have been paused by a TDH.EXPORT.PAUSE.

5.4.8.3.2. Enumeration

- 10 Availability of TDH.EXPORT.STATE.TD is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.EXPORT.STATE.TD returns a TDX_OPERAND_INVALID(RAX) status.

The required number of 4KB pages for exporting the mutable TD state is enumerated by NUM_TD_STATE_PAGES.

5.4.8.3.3. Interruptibility

- 15 If a pending interrupt is detected during operation, TDH.EXPORT.STATE.TD returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The host VMM is expected to resume it, by calling it with R10.RESUME set to 1. If the host VMM cannot resume TDH.EXPORT.STATE.TD for some reason, it should abort the export session (TDH.EXPORT.ABORT).

5.4.8.3.4. Aspects of MAC Calculation Compatibility on TDX Module Update

- 20 If TDH.EXPORT.STATE.TD was interrupted, and later the TDX Module was updated before TDH.EXPORT.STATE.TD was resumed, there could be incompatibility issues with the format of the intermediate MRTD MAC context, held as part of the migration stream context (MIGSC), between the original and the new TD module.

- On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.EXPORT.STATE.TD returns a TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT status. In this case, the host VMM is expected to abort the migration session and may restart it. For details, see the [Base Spec] section titled "Compatibility Aspects of TD-Preserving Update".

If the host VMM did not configure the TDX Module to detect such incompatibility, it will not be detected by TDH.EXPORT.STATE.TD. However, on import, TDH.IMPORT.STATE.TD will detect that the MAC is incorrect and will return a TDX_INCORRECT_MBMD_MAC error.

5.4.8.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.32: TDH.EXPORT.STATE.TD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	R8	HPA	Memory to use for MBMD	MBMD	RW	Shared	128B	None	None	None
Explicit	R9	HPA	Page list	PAGE_LIST	R	Shared	4KB	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Explicit	N/A	HPA	Destination pages (via page list)	Blob	RW	Shared	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	None	N/A	N/A

5.4.8.5. Completion Status Codes

Table 5.33: TDH.EXPORT.STATE.TD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT	
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_RESUMPTION	
TDX_METADATA_LIST_OVERFLOW	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.9. TDH.EXPORT.STATE.VP Leaf

TDH.EXPORT.STATE.VP exports a paused TD's VCPU mutable state as a multi-page migration bundle.

5.4.9.1. Input Operands

Table 5.34: TDH.EXPORT.STATE.VP Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 74
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	TDVPR	HPA of the source TD VCPU's TDVPR page (HKID bits must be 0)		
R8	MBMD	HPA and size of memory of a memory buffer to use for MBMD:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	PAGE_LIST_INFO	Migration buffers list information – see 3.13.6.1 See enumeration details below.		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index If N migration streams have been created by TDH.MIG.STREAM.CREATE, then MIGS_INDEX must be lower than N-1.
		62:16	RESERVED	Reserved: must be 0
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

5.4.9.2. Output Operands

Table 5.35: TDH.EXPORT.STATE.VP Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1

Operand	Name	Description
RDX	NUM_EXPORTED	Number of exported 4KB migration buffers
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.9.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.9.3.1. Overview

TDH.EXPORT.STATE.VP exports a TD's VCPU mutable state as a migration bundle, which includes an MBMD and a set of 4KB pages, encrypted with the migration session key. The migration bundle is protected by a MAC that is stored in the MBMD. The TD must have been paused by a TDH.EXPORT.PAUSE.

5.4.9.3.2. Enumeration

Availability of TDH.EXPORT.STATE.VP is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.EXPORT.STATE.VP returns a TDX_OPERAND_INVALID(RAX) status.

The required number of 4KB pages for exporting the mutable VCPU state is enumerated by NUM_VP_STATE_PAGES.

5.4.9.3.3. Interruptibility

If a pending interrupt is detected during operation, TDH.EXPORT.STATE.VP returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The host VMM is expected to resume it, by calling it with R10.RESUME set to 1. If the host VMM cannot resume TDH.EXPORT.STATE.VP for some reason, it should abort the export session (TDH.EXPORT.ABORT).

5.4.9.3.4. Aspects of MAC Calculation Compatibility on TDX Module Update

If TDH.EXPORT.STATE.VP was interrupted, and later the TDX Module was updated before TDH.EXPORT.STATE.VP was resumed, there could be incompatibility issues with the format of the intermediate MRTD MAC context, held as part of the migration stream context (MIGSC), between the original and the new TD module.

On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.EXPORT.STATE.VP returns a TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT status. In this case, the host VMM is expected to abort the migration session and may restart it. For details, see the [Base Spec] section titled "Compatibility Aspects of TD-Preserving Update".

If the host VMM did not configure the TDX Module to detect such incompatibility, it will not be detected by TDH.EXPORT.STATE.VP. However, on import, TDH.IMPORT.STATE.VP will detect that the MAC is incorrect and will return a TDX_INCORRECT_MBMD_MAC error.

5.4.9.3.5. VCPU Association

TDH.EXPORT.VP associates the TD VCPU with the current LP. This requires that the VCPU will not be associated with another LP – for details, see the [TDX Module Base Spec].

5.4.9.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.36: TDH.EXPORT.STATE.VP Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDVPR page	TDVPS	RW	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R8	HPA	Memory to use for MBMD	MBMD	RW	Shared	128B	None	None	None
Explicit	R9	HPA	Page list	PAGE_LIST	R	Shared	4KB	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Explicit	N/A	HPA	Destination pages (via page list)	Blob	RW	Shared	4KB	None	None	None
Implicit	N/A	HPA	TDR page	TDR	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	None	N/A	N/A

5.4.9.5. Completion Status Codes**Table 5.37: TDH.EXPORT.STATE.VP Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT	
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_RESUMPTION	
TDX_METADATA_LIST_OVERFLOW	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	

Completion Status Code	Description
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_VCPU_ALREADY_EXPORTED	
TDX_VCPU_STATE_INCORRECT	The VCPU is expected to be in the VCPU_READY state. For details, see the [Base Spec] discussion of VPCU transitions.

5.4.10. TDH.EXPORT.TRACK Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 TDH.EXPORT.TRACK ends the current export epoch and starts a new one. It either starts a new in-order phase epoch or starts the out-of-order phase. In both cases, TDH.EXPORT.TRACK generates an epoch token to be exported to the destination platform.

5.4.10.1. Input Operands

Table 5.38: TDH.EXPORT.TRACK Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 71
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	HPA of the source TD's TDR page (HKID bits must be 0)		
R8	HPA and size of memory of a memory buffer to use for MBMD:		
	Bits	Name	Description
	51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
	63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R10	Migration stream and flags:		
	Bits	Name	Description
	15:0	MIGS_INDEX	Migration stream index – must be 0
	62:16	RESERVED	Reserved: must be 0
	63	IN_ORDER_DONE	Indicates that the in-order export phase is done, and a start token should be generated

5.4.10.2. Output Operands

Table 5.39: TDH.EXPORT.TRACK Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1

Operand	Description
AVX, AVX2 and AVX512 state	May be reset to the architectural RESET state
Other	Unmodified

5.4.10.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.10.3.1. Overview

If R10.IN_ORDER_DONE is 0, TDH.EXPORT.TRACK starts a new export epoch.

Else (R10.IN_ORDER_DONE is 1), TDH.EXPORT.TRACK checks that no memory exported so far needs to be re-exported. If so, it ends the in-order export phase and starts the out-of-order phase.

In both cases, TDH.EXPORT.TRACK generates an epoch token, to be exported on the specified migration stream.

When called as part of S4 hibernation, R10.IN_ORDER_DONE must be 1.

5.4.10.3.2. Enumeration

Availability of TDH.EXPORT.TRACK is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.EXPORT.TRACK returns a TDX_OPERAND_INVALID(RAX) status.

5.4.10.3.3. Epoch Token Generation

TDH.EXPORT.TRACK generates an epoch token, to be exported. The epoch token, once successfully imported on the destination side, indicates that a new migration epoch has started.

5.4.10.3.4. End of the In-Order Phase and Start Token Generation

An R10.IN_ORDER_DONE value of 1 indicates that TDH.EXPORT.TRACK is requested to end the in-order export phase, start the out-of-order phase and generate a start token to be exported. A start token is a private case of an epoch token. Once successfully imported on the destination side, the start token enables the host VMM to commit the migration and start running the TD on the destination.

TDH.EXPORT.TRACK checks the completeness of memory export:

- TDH.EXPORT.TRACK checks that the TD has been paused by TDH.EXPORT.PAUSE.
- If the TDX module is configured for non-blocking export, TDH.EXPORT.TRACK checks that a comprehensive scan was successfully done using TDH.MEM.SCAN.COMP(DCHECK).
- TDH.EXPORT.TRACK checks that no TD private memory exported so far needs to be re-exported.
- If either the TD is configured for TDX Connect or the TDX module does not support post-copy (this is the case if the TDX module is configured for non-blocking export), TDH.EXPORT.TRACK checks that all the TD private memory has been exported.

When called as part of S4 hibernation, R10.IN_ORDER_DONE must be 1.

5.4.10.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.40: TDH.EXPORT.TRACK Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	R8	HPA	Memory to use for MBMD	MBMD	RW	Shared	128B	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A

5.4.10.5. Completion Status Codes

Table 5.41: TDH.EXPORT.TRACK Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EXPORTED_DIRTY_PAGES_REMAIN	
TDX_MEM_SCAN_DCHECK_NOT_DONE	
TDX_MIGRATION_EPOCH_OVERFLOW	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_UNEXPORTED_MEMORY_REMAINS	

5.4.11. TDH.EXPORT.UNBLOCKW Leaf

Remove the write-blocking of a 4KB TD private page previously blocked by TDH.EXPORT.BLOCKW.

5.4.11.1. Input Operands

Table 5.42: TDH.EXPORT.UNBLOCKW Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 75
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the Secure EPT entry that maps the page to be blocked for writing – see 3.6.1: must be 0 (4KB)
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the GPA to be unblocked for writing
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		

5.4.11.2. Output Operands

Table 5.43: TDH.EXPORT.UNBLOCKW Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry where the error was detected In other cases, RCX returns 0
RDX	Extended error information part 2 In case of EPT walk error, EPT level where the error was detected In other cases, RDX returns 0
Other	Unmodified

5.4.11.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.11.3.1. Overview

TDH.EXPORT.UNBLOCKW finds the write blocked Secure EPT entry for the given GPA and level. It verifies that the entry has been blocked for writing and TLB tracking has been done, then marks the entry as non-blocked for writing (MAPPED, PENDING, EXPORTED_DIRTY or PENDING_EXPORTED_DIRTY as appropriate). If the page has any L2 mappings, TDH.EXPORT.UNBLOCKW unblocks them.

5.4.11.3.2. Enumeration

Availability of TDH.EXPORT.UNBLOCKW is enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.EXPORT.UNBLOCKW returns a TDX_OPERAND_INVALID(RAX) status.

5.4.11.3.3. Export Mode

TDH.EXPORT.UNBLOCKW is only available if the TDX module is configured for write-blocking based export (the default). If not available, calling TDH.EXPORT.UNBLOCKW returns a TDX_OPERAND_INVALID(RAX) status.

5.4.11.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.44: TDH.EXPORT.UNBLOCKW Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA and Level	Secure EPT page or TD private page	Blob	None	Private	$2^{12+9*\text{Level}}$ Bytes	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	None	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.11.5. Completion Status Codes

Table 5.45: TDH.EXPORT.UNBLOCKW Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	

Completion Status Code	Description
TDX_NOT_WRITE_BLOCKED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.EXPORT.UNBLOCKW is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	

5.4.12. TDH.EXT.INIT Leaf

Unreleased Feature: This section is related to TDX Module Extensions, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

- 5 TDH.EXT.INIT initializes TDX Module extension.

5.4.12.1. Input Operands

Table 5.46: TDH.EXT.INIT Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 60
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0

5.4.12.2. Output Operands

10 Table 5.47: TDH.EXT.INIT Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
Other		Unmodified

5.4.12.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

15 5.4.12.3.1. Overview

TDH.EXT.INIT initializes the TDX Module extension.

5.4.12.3.2. Enumeration

Availability of TDH.EXT.INIT is enumerated by TDX_FEATURES0.NRX (bit 39), readable by TDH.SYS.RD*. If not supported, TDH.EXT.INIT returns a TDX_OPERAND_INVALID(RAX) status.

20 5.4.12.3.3. Interruptibility

TDH.EXT.INIT is interruptible. If a pending interrupt is detected during operation, TDH.EXT.INIT returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The host VMM may re-invoke TDH.EXT.INIT after handling the interrupt, keeping the same inputs.

5.4.12.4. Operands Information

- 25 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.48: TDH.EXT.INIT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	TDX Module extension state	N/A	RW	Hidden	N/A	Exclusive	None	None
Implicit	N/A	N/A	NRX TDs' TDR	TDR	RW	Hidden	N/A	Exclusive(i)	None	None
Implicit	N/A	N/A	All other NRX TDs' state	N/A	RW	Hidden	N/A	Exclusive(i)	None	None

5.4.12.5. Completion Status Codes**Table 5.49: TDH.EXT.INIT Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_EXT_FATAL_ERROR	
TDX_EXT_MEMORY_POOL_REQUIRED	
TDX_INCONSISTENT_MSR	IA32_TSC_ADJUST - MSR value is not the same as capture during the TDX Module initialization
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_RESUMPTION	
TDX_LIMIT_CPUID_MAXVAL_SET	
TDX_OPERAND_BUSY	
TDX_SUCCESS	
TDX_SYS_BUSY	
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TSC_ROLLBACK	

5.4.13. TDH.EXT.MEM.ADD Leaf

Unreleased Feature: This section is related to TDX Module Extensions, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

- 5 TDH.EXT.MEM.ADD adds up to 512 4KB memory pages to the TDX Module's memory pool.

5.4.13.1. Input Operands

Table 5.50: TDH.EXT.MEM.ADD Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 61
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	PAGE_LIST_INFO	Reference to a list of memory pages to add, in HPA_LIST_INFO format – See 3.5.3		

5.4.13.2. Output Operands

10

Table 5.51: TDH.EXT.MEM.ADD Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	PAGE_LIST_INFO	Same as the input value, except that FIRST_ENTRY is updated to the index of the next entry to be processed. If all entries have been processed, FIRST_ENTRY is updated to (LAST_ENTRY + 1) Modulo 512.
RDX	RESERVED	Set to 0
Other		Unmodified

5.4.13.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

15

5.4.13.3.1. Overview

TDH.EXT.MEM.ADD adds up to 512 4KB pages to the TDX Module's memory pool.

5.4.13.3.2. Enumeration

Availability of TDH.EXT.MEM.ADD is enumerated by TDX_FEATURES0.NRX (bit 39), readable by TDH.SYS.RD*. If not supported, calling TDH.EXT.MEM.ADD returns a TDX_OPERAND_INVALID(RAX) status.

The required number of memory pool pages is provided by MEMORY_POOL_REQUIRED_PAGES, readable by TDH.SYS.RD.

5 5.4.13.3.3. Interruptibility

TDH.EXT.MEM.ADD is interruptible. If a pending interrupt is detected during operation, TDH.EXT.MEM.ADD returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. RCX is updated with the next list entry index to process, so the host VMM may re-invoke TDH.EXT.MEM.ADD immediately after handling the interrupt, keeping the same inputs.

5.4.13.4. Operands Information

- 10 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.52: TDH.EXT.MEM.ADD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	List page	HPA list	R	Shared	4KB	None	None	None
Explicit	N/A	HPA	Pool pages	Blob	RW	Private	4KB	None	None	None
Explicit	N/A	HPA	Memory pool buffer pages (via page list)	Blob	RW	Shared	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	NRX state	N/A	R	Hidden	N/A	Shared	None	None

5.4.13.5. Completion Status Codes

15 **Table 5.53: TDH.EXT.MEM.ADD Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_RESUMPTION	
TDX_SUCCESS	
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_EXT_MEMORY_POOL_FULL	
TDX_EXT_MEMORY_POOL_NOT_PENDING	
TDX_SYS_BUSY	
TDX_OPERAND_INVALID	
TDX_PAGE_METADATA_INCORRECT	
TDX_EXT_MEMORY_POOL_OVERFLOW	

5.4.14. TDH.IMPORT.ABORT Leaf

Abort an import session; after this the target TD can only be destroyed. Generate an abort token that is to be consumed by the source platform.

5.4.14.1. Input Operands

Table 5.54: TDH.IMPORT.ABORT Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 80
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	HPA of the destination TD's TDR page (HKID bits must be 0)		
R8	HPA and size of memory of a memory buffer to use for MBMD:		
	Bits	Name	Description
	51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
	63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R10	Migration stream index – must be 0		

5.4.14.2. Output Operands

Table 5.55: TDH.IMPORT.ABORT Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1
AVX, AVX2 and AVX512 state	May be reset to the architectural RESET state
Other	Unmodified

5.4.14.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.14.3.1. Overview

TDH.IMPORT.ABORT generates an abort token MBMD and sets the destination TD's OP_STATE to IMPORT_FAILED. In this state, the destination TD will not run; it can only be destroyed. This is indicated by the FATAL bit (61) of the completion status returned in RAX.

5.4.14.3.2. Enumeration

Availability of TDH.IMPORT.ABORT is enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.IMPORT.ABORT returns a TDX_OPERAND_INVALID(RAX) status.

5.4.14.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.56: TDH.IMPORT.ABORT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R8	HPA	Memory to use for MBMD	MBMD	RW	Shared	128B	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.14.5. Completion Status Codes

Table 5.57: TDH.IMPORT.ABORT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.15. TDH.IMPORT.COMMIT Leaf

Commit an import session and allow the imported TD to run.

5.4.15.1. Input Operands

Table 5.58: TDH.IMPORT.COMMIT Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 82
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	HPA of the destination TD's TDR page (HKID bits must be 0)		

5.4.15.2. Output Operands

Table 5.59: TDH.IMPORT.COMMIT Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1
Other	Unmodified

5.4.15.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.15.3.1. Overview

TDH.IMPORT.COMMIT commits an import session and allows the important TD to run. Post-copy memory import may continue.

5.4.15.3.2. Enumeration

Availability of TDH.IMPORT.COMMIT is enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.IMPORT.COMMIT returns a TDX_OPERAND_INVALID(RAX) status.

5.4.15.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.60: TDH.IMPORT.COMMIT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.15.5. Completion Status Codes

Table 5.61: TDH.IMPORT.COMMIT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.16. TDH.IMPORT.END Leaf

End an import session.

5.4.16.1. Input Operands

Table 5.62: TDH.IMPORT.END Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 81
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	HPA of the destination TD's TDR page (HKID bits must be 0)		

5.4.16.2. Output Operands

Table 5.63: TDH.IMPORT.END Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1
Other	Unmodified

5.4.16.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.16.3.1. Overview

TDH.IMPORT.END ends an import session and allows the important TD to run (if not already allowed by TDH.IMPORT.COMMIT).

When called as part of an S4 resumption session, TDH.IMPORT.END must be called after no future replay is prevented by calling TDH.SYS.S4_END.

5.4.16.3.2. Enumeration

Availability of TDH.IMPORT.END is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.IMPORT.END returns a TDX_OPERAND_INVALID(RAX) status.

5.4.16.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.64: TDH.IMPORT.END Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.16.5. Completion Status Codes

Table 5.65: TDH.IMPORT.END Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.17. TDH.IMPORT.MEM Leaf

TDH.IMPORT.MEM imports a list of TD private pages contents and/or cancellation requests based on a migration bundle in shared memory.

5.4.17.1. Input Operands

5

Table 5.66: TDH.IMPORT.MEM Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 83
		23:16	Version Number	Selects the SEAMCALL interface function version Version may be 0 or 1. See enumeration details below.
		63:24	Reserved	Must be 0
RCX	GPA_LIST_INFO	HPA of a GPA list page in shared memory, and first and last entries to process, as defined in 3.13.2 On a new invocation, FIRST_ENTRY must be 0. On a resumed invocation, FIRST_ENTRY must be the index of the next GPA list entry to export.		
RDX	TDR	HPA of the destination TD's TDR page (HKID bits must be 0)		
R8	MBMD	HPA and size of memory of an MBMD structure in memory:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	MIG_BUFF_LIST	HPA (including HKID bits) of a migration buffer list in shared memory, corresponding to the GPA list pointed by RCX – see 3.13.3. No migration buffers are required for PENDING pages and for migration cancellation requests. The list entries for such pages are skipped.		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index If N migration streams have been created by TDH.MIG.STREAM.CREATE, then MIGS_INDEX must be lower than N-1.
		62:16	RESERVED	Reserved: must be 0
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

Operand	Name	Description
R11	MAC_LIST_0	HPA (including HKID bits) of a MAC list in shared memory, corresponding to the first 256 entries of the GPA list pointed by RCX – see 3.13.3. If GPA_LIST_INFO.FIRST_ENTRY >= 256, then MAC_LIST_0 is ignored.
R12	MAC_LIST_1	HPA (including HKID bits) of a MAC list in shared memory, corresponding to the last 256 entries of the GPA list pointed by RCX – see 3.13.3. If GPA_LIST_INFO.LAST_ENTRY < 256, then MAC_LIST_1 is ignored.
R13	PAGE_LIST	HPA (including HKID bits) of a destination page list in shared memory. See the description below for details.
R14	ATTRIB_LIST	If GPA_LIST_INFO.FORMAT is GPA_AND_L2_ATTR, then R14 contains the HPA (including HKID bits) of a page L2 attributes list in shared memory – see 3.13.4. Else, R14 is ignored. An ATTRIB_LIST is mandatory for importing partitioned TDs (which contain one or more L2 VMs). Enumeration: Support of this feature is enumerated by TDX_FEATURES0.PARTITIONED_TD_MIGRATION, readable by TDH.SYS.RD* (see 3.3.3.1).

5.4.17.2. Output Operands

Table 5.67: TDH.IMPORT.MEM Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	GPA_LIST_INFO	Same as the input value, except that FIRST_ENTRY is updated to the index of the next entry to be processed. If all entries have been processed, FIRST_ENTRY is updated to (LAST_ENTRY + 1) Modulo 512.
R8	LIST_ERR_COUNT	If TDH.IMPORT.MEM was called with version 1 or higher, R8 returns the number of GPA list entries where an error was encountered. Else, R8 is unmodified.
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.17.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.17.3.1. Overview

TDH.IMPORT.MEM imports a list of up to 512 TD private 4KB pages based on a migration bundle, which includes an MBMD, set of 4KB pages encrypted with the migration session key, a 4KB page containing the GPA and attributes list, an optional 4KB containing page attributes list, and two 4KB pages containing page MACs.

For each page in the migration bundle's GPA list, the requested operation may either be to import the page, to re-import a newer version of the page (after a previous import) or to cancel a previous page import. It is also possible to skip entries in the list by requesting no operation for specific entries. The GPA list format is described in 3.13.2.

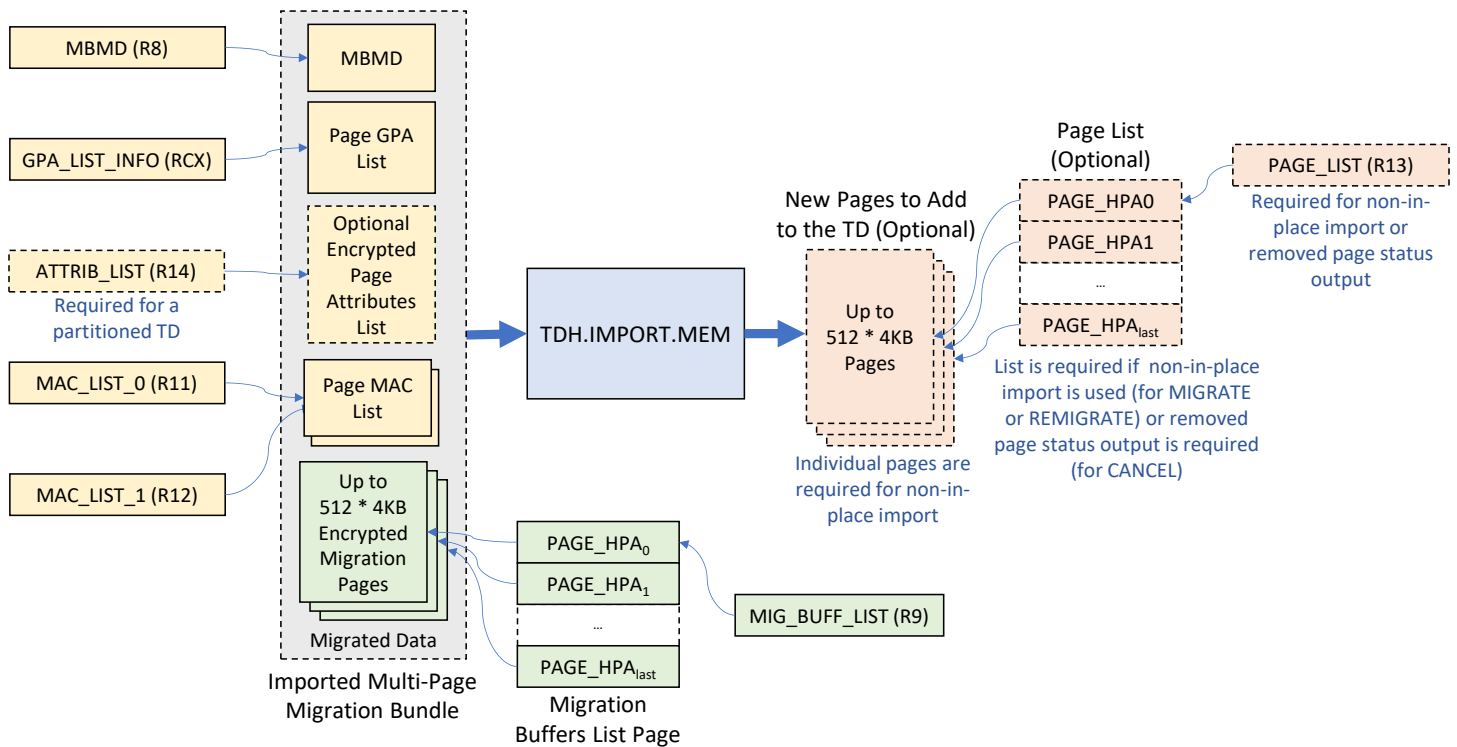


Figure 5.2: TDH.IMPORT.MEM Inputs and Outputs

Entries in the Page GPA List (pointed by RCX), Page Attributes List (pointed by R14), Page MAC List (pointed by R11 and R12), Migration Buffers List (pointed by R9) and Page List (pointed by R13) are sorted in the same order. I.e., entry N in each of those lists applies to the same imported page.

5.4.17.3.2. Enumeration

Availability of TDH.IMPORT.MEM is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.IMPORT.MEM returns a TDX_OPERAND_INVALID(RAX) status.

TDX_FEATURES0.PARTITIONED_TD_MIGRATION (bit 21) enumerates TDX Module support of migrating partitioned TDs (which contain one or more L2 VMs).

TDX_FEATURES0.IMPORT_PAGE_STATUS (bit 44) enumerates update of page list entries to indicate status (see below).

Support of TDH.EXPORT.MEM version 1 or higher is enumerated by TDX_FEATURES0.LIST_ERROR_COUNT (bit 54).

5.4.17.3.3. Page List

If a page list is provided, i.e., R13 contains a valid shared HPA of a page containing page list entry, then each entry in the list is processed as follows:

A page list entry (see the format in 3.11.1) is used by TDH.IMPORT.MEM on input as follows:

- If the INVALID bit (63) is 0, the entry should contain a valid shared HPA of a page that can be converted to a TD private page (HKID bits must be 0). TDH.IMPORT.MEM uses this page for a MIGRATE operation.
- Else (the INVALID bit is 1), the entry doesn't point to a page. For a MIGRATE operation, TDH.IMPORT.MEM uses the applicable migration buffer for in-place import (see below). To facilitate parsing of the list entry on output (see below) it is recommended that the host VMM will set such entries to NULL_PA (all 1's).

A page list entry is updated by TDH.IMPORT.MEM on output as follows:

- If an entry was skipped due to a NOP operation or due to an error, the INVALID bit (63) is set to 1.

The following applies only if TDX_FEATURES0.IMPORT_PAGE_STATUS (bit 44) is enumerated as 1:

- If a page was provided on input (i.e., the INVALID bit was 0) but was not used by TDH.IMPORT.MEM as a TD private page, the INVALID bit is set to 1.
- If the import operation was CANCEL and it successfully removed a TD private page, and a page was not provided on input (the INVALID bit was 1), the page list entry is updated as follows:
 - Bits 51:0 contain the removed page HPA (HKID bits are 0).
 - The REMOVED bit (61) is set to 1 to indicate a removed page.
 - If the TDX Module is configured for Dynamic PAMT, the PAMT_REMOVAL_HINT bit (62) provides a hint that the PAMT pages mapping the removed page are empty and can be removed.
 - The INVALID bit (63) is cleared to 0.

If a page list is not provided, i.e., R13 contains NULL_PA (all 1's), then in-place import must be used for MIGRATE operations. Other import operations (NOP, REMIGRATE, CANCEL) never require a new TD private page.

5.4.17.3.4. Re-Import

Re-import is only allowed during the in-order import phase. The imported pages replace an older version of the same pages, if the SEPT entry state is compatible:

- If the old SEPT state is PENDING, it may be overwritten by a new version that is either PENDING or MAPPED.
- If the old SEPT state is MAPPED, then if the TDX module supports page release by the guest TD, as enumerated by TDX_FEATURES0.PAGE_RELEASE, it may be overwritten by a new version that is either MAPPED or PENDING. Else, it may only be overwritten by a new version that is MAPPED.

Page attributes (e.g., RWX etc.) of a new page version may be different than those of a previously imported version.

If the out-of-order import phase, the imported pages may not overwrite an older version of the same pages.

5.4.17.3.5. In-Place Import

First-time import of a page during the current import session, or following a previous import cancellation, may be done in-place; the same physical pages that are provided as input are converted to TD private pages. Alternatively, a list of 4KB pages to be used as the destination TD new private pages may be provided, as described above. In any case, either a migration buffer or a new page must be provided, even if the imported page is PENDING and no content is imported.

Re-import of a page is always done over the TD private page that holds the previously imported version.

5.4.17.3.6. GPA List Entry Error Handling

If a page can't be imported for a reason that is specific to that page, TDH.IMPORT.MEM marks its GPA list entry as unsuccessful.

In the following cases, the TDX Module aborts the import session because the memory state of the imported TD can't be guaranteed to be correct. The target TD is marked as IMPORT_FAILED and, by design, will not run. This is indicated by the FATAL bit (61) of the completion status returned in RAX.

This is applicable for the following GPA list entry's STATUS field values, as written by TDH.IMPORT.MEM. Refer to the STATUS field definition in 3.13.2.4.7.

- INVALID_PAGE_MAC
- GPA_LIST_ENTRY_INVALID
- OP_STATE_INCORRECT
- MIG_BUFFER_NOT_AVAILABLE
- DISALLOWED_IMPORT_OVER_REMOVED
- NEW_PAGE_NOT_AVAILABLE (if provided HPA is not valid)
- ATTR_LIST_ENTRY_INVALID
- MIGRATED_IN_CURRENT_EPOCH

In the following cases, the TDX Module aborts the import session only if it has not been committed yet (by TDH.IMPORT.COMMIT). If the import session has been committed, GPA list processing continues to the next entry, if applicable.

This is applicable for the following GPA list entry's STATUS field values, as written by TDH.IMPORT.MEM.

- SEPT_WALK_FAILED
- SEPT_ENTRY_BUSY_HOST_PRIORITY
- SEPT_ENTRY_STATE_INCORRECT
- NEW_PAGE_NOT_AVAILABLE (if provided HPA is valid)

- L2_SEPT_WALK_FAILED

Note: Skipping a GPA list entry whose OPERATION is NOP is not considered an error. The STATUS field is written as SKIPPED.

If TDH.IMPORT.MEM was called with version 1 or higher, R8 returns the number of GPA list entries where an error was encountered since it was last invoked, either as a new invocation or as a resumption of a previously interrupted operation. Else, R8 is unmodified.

5.4.17.3.7. S4 Resumption

If TDH.IMPORT.MEM is called as part of an S4 hibernation, it only supports the out-of-order import phase. As a result, the GPA list may not contain CANCEL and REMIGRATE operations.

In case of an import error, then in addition to aborting the import of the current TD, an abort of an S4 resumption session also generates a new S4 anti-replay nonce, preventing a new S4 resumption session from starting.

5.4.17.3.8. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. If a missing PAMT page pair is detected during operation, TDH.IMPORT.MEM returns with a TDX_INTERRUPTED_PAMT status in RAX. RCX is updated with the list entry for which the error happened. The host VMM is expected to add the missing PAMT page pair using TDH.PHYMEM.PAMT.ADD, then re-invoke TDH.IMPORT.MEM, keeping the same inputs as the original invocation except using the updated RCX value and setting R10.RESUME to 1.

5.4.17.3.9. Interruptibility

TDH.IMPORT.MEM is interruptible. If a pending interrupt is detected during operation, TDH.IMPORT.MEM returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. RCX is updated with the next list entry index to process, so the host VMM may re-invoke TDH.IMPORT.MEM immediately after handling the interrupt, keeping the same inputs except setting R10.RESUME to 1. If the host VMM cannot resume TDH.IMPORT.MEM for some reason, it should abort the import session (TDH.IMPORT.ABORT).

5.4.17.3.10. Removed Page Initialization

On platforms which do not use ACT, after any private pages have been removed by a CANCEL operation, the host VMM should initialize their content before they are reused as non-private pages, as described in the [Base Spec].

5.4.17.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.68: TDH.IMPORT.MEM Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ¹²
Explicit	RCX	HPA	GPA List page	GPA_LIST	RW	Shared	4KB	None	None	None	None
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared	None
Explicit	R8	HPA	MBMD	MBMD	R	Shared	128B	None	None	None	None
Explicit	R9	HPA	Migration buffer list	PAGE_LIST	R	Shared	4KB	None	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A	N/A

¹² ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ¹²
Explicit	R11	HPA	MAC list page 1	MAC list	R	Shared	4KB	None	None	None	None
Explicit	R12	HPA	MAC list page 2	MAC list	R	Shared	4KB	None	None	None	None
Explicit	R13	HPA	Destination page list	Blob	RW	Private	4KB	Exclusive	Shared	Shared	None
Explicit	R14	HPA	L2 attributes list page	L2 page attributes	R	Shared	4KB	None	None	None	None
Explicit	N/A	GPA	TD private pages (via GPA list)	Blob	None	Private	4KB	None	None	None	None
Explicit	N/A	HPA	Migration buffer pages (via page list)	Blob	RW	Shared	4KB	None	None	None	None
Explicit	N/A	HPA	Destination pages (via page list)	Blob	RW	Private	4KB	Exclusive	Shared	Shared	Exclusive
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Shared	N/A	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A	N/A

5.4.17.5. Completion Status Codes

Table 5.69: TDH.IMPORT.MEM Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_DISALLOWED_IMPORT_OVER_REMOVED	
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_IMPORT_MISMATCH	
TDX_INTERRUPTED_PAMT	
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_MBMD	

Completion Status Code	Description
TDX_INVALID_PAGE_MAC	
TDX_INVALID_RESUMPTION	
TDX_MIGRATED_IN_CURRENT_EPOCH	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	The operation is successful. Note: Processing of some GPA list entries may have encountered errors, but this did not cause an abort of the overall operation. The number of such errors is reported in the lower 32 bits of the completion status.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.18. TDH.IMPORT.STATE.IMMUTABLE Leaf

TDH.IMPORT.STATE.IMMUTABLE starts a new import session and exports the TD's immutable state as a multi-page migration bundle.

TDH.IMPORT.STATE.IMMUTABLE is also used for starting a new S4 resumption session.

5.4.18.1. Input Operands

Table 5.70: TDH.IMPORT.STATE.IMMUTABLE Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 85
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	TDR	Destination TD handle and flags		
		Bits	Name	Description
		0	Import Type	0: TD Import 1: S4 Resumption
		11:1	Reserved	Must be 0
		51:12	TDR HPA	HPA[51:12] of the destination TD's TDR page (HKID bits must be 0)
		63:52	Reserved	Must be 0
R8	MBMD	HPA and size of memory of an MBMD structure in memory:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	PAGE_LIST_INFO	Migration buffers list information – see 3.13.6.1		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index – must be 0
		62:16	RESERVED	Reserved: must be 0
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

5.4.18.2. Output Operands

Table 5.71: TDH.IMPORT.STATE.IMMUTABLE Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	EXTENDED_ERROR_INFO1	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RCX is unmodified. In case of an error related to non-memory state field import, as indicated by RAX, RCX contains the offending field identifier. See the status codes table below. In other cases, RCX returns 0.
RDX	EXTENDED_ERROR_INFO2	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RDX is unmodified. In other cases, RDX returns 0.
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.18.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.18.3.1. Overview

TDH.IMPORT.STATE.IMMUTABLE starts a new import session. It imports the TD's immutable state migration bundle previously exported by TDH.EXPORT.STATE.IMMUTABLE. The migration bundle includes an MBMD and a set of 4KB pages.

TDH.IMPORT.STATE.IMMUTABLE is also used for starting a new S4 resumption session.

TD immutable state is verified by TDH.IMPORT.STATE.IMMUTABLE against target platform capabilities and Intel TDX Module version, capabilities and configuration. The checks are similar, but not identical, to the TD_PARAMS checks done on the source platform by TDH.MNG.INIT.

5.4.18.3.2. Enumeration

Availability of TDH.IMPORT.STATE.IMMUTABLE is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.IMPORT.STATE.IMMUTABLE returns a TDX_OPERAND_INVALID(RAX) status.

5.4.18.3.3. Interruptibility

- If a pending interrupt is detected during operation, TDH.IMPORT.STATE.IMMUTABLE returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The host VMM is expected to resume it, by calling it with R10.RESUME set to 1. If the host VMM cannot resume TDH.IMPORT.STATE.IMMUTABLE for some reason, it should abort the import session (TDH.IMPORT.ABORT).

5.4.18.3.4. Aspects of MAC Calculation Compatibility on TDX Module Update

- If TDH.IMPORT.STATE.IMMUTABLE was interrupted, and later the TDX Module was updated before TDH.IMPORT.STATE.IMMUTABLE was resumed, there could be incompatibility issues with the format of the intermediate MRTD MAC context, held as part of the migration stream context (MIGSC), between the original and the new TD module.
- On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.IMPORT.STATE.IMMUTABLE returns a TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT status. In this case, the host

VMM is expected to abort the migration session and may restart it. For details, see the [Base Spec] section titled “Compatibility Aspects of TD-Preserving Update”.

If the host VMM did not configure the TDX Module to detect such incompatibility, it will not be detected by TDH.IMPORT.STATE.IMMUTABLE. However, TDH.IMPORT.STATE.IMMUTABLE will detect that the MAC is incorrect and will return a TDX_INCORRECT_MBMD_MAC error.

5.4.18.3.5. Import Abort

A failed TDH.IMPORT.STATE.IMMUTABLE marks (except in cases where the imported TD state has not been modified) the target TD as IMPORT_FAILED; by design, it will not run. This is indicated by the FATAL bit (61) of the completion status returned in RAX.

5.4.18.3.6. S4 Resumption Abort

In addition to aborting the import of the current TD, an abort of an S4 resumption session also generates a new S4 anti-replay nonce, preventing a new S4 resumption session from starting.

5.4.18.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.72: TDH.IMPORT.STATE.IMMUTABLE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R8	HPA	MBMD	MBMD	R	Shared	128B	None	None	None
Explicit	R9	HPA	Page list	PAGE_LIST	R	Shared	4KB	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Explicit	N/A	HPA	Source pages (via page list)	Blob	R	Shared	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	PL.S4_STATE	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.18.5. Completion Status Codes

Table 5.73: TDH.IMPORT.STATE.IMMUTABLE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT	
TDX_INCORRECT_MBMD_MAC	
TDX_INTERRUPTED_RESUMABLE	

Completion Status Code	Description
TDX_INVALID_MBMD	
TDX_INVALID_METADATA_LIST_HEADER	
TDX_INVALID_RESUMPTION	
TDX_METADATA_FIELD_ID_INCORRECT	Field ID or sequence header is returned in RCX
TDX_METADATA_FIELD_NOT_WRITABLE	Field ID is returned in RCX
TDX_METADATA_FIELD_VALUE_NOT_VALID	Field ID is returned in RCX
TDX_METADATA_LIST_OVERFLOW	
TDX_MIGRATION_SESSION_KEY_NOT_SET	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_NUM_MIGS_HIGHER_THAN_CREATED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_REQUIRED_METADATA_FIELD_MISSING	Required field ID is returned in RCX
TDX_RND_NO_ENTROPY	Failed to generate a random migration encryption key. This is typically caused by an entropy error of the CPU's random number generator, and may be impacted by RDSEED, RDRAND or PCONFIG executing on other LPs. The operation should be retried.
TDX_SERVTD_EXT_MISMATCH	Rebind SERVTD_EXT hash did not match
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_VIRTUAL_MSR_VALUE_NOT_VALID	

5.4.19. TDH.IMPORT.STATE.TD Leaf

TDH.IMPORT.STATE.TD imports the TD-scope mutable state as a multi-page migration bundle.

5.4.19.1. Input Operands

Table 5.74: TDH.IMPORT.STATE.TD Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 86
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	TDR	HPA of the destination TD TDR page (HKID bits must be 0)		
R8	MBMD	HPA and size of memory of an MBMD structure in memory:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	PAGE_LIST_INFO	Migration buffers list information – see 3.13.6.1		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index – must be 0
		62:16	RESERVED	Reserved: must be 0
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

5

5.4.19.2. Output Operands

Table 5.75: TDH.IMPORT.STATE.TD Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	EXTENDED_ERROR_INFO1	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RCX is unmodified. In case of an error related to non-memory state field import, as indicated by RAX, RCX contains the offending field identifier. See the status codes table below.

Operand	Name	Description
		In other cases, RCX returns 0.
RDX	EXTENDED_ERROR_INFO2	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RDX is unmodified. In other cases, RDX returns 0.
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.19.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5 5.4.19.3.1. Overview

TDH.IMPORT.STATE.TD imports the TD-scope mutable state migration bundle previously exported by TDH.EXPORT.STATE.TD. The migration bundle includes an MBMD and a set of 4KB pages.

TD-scope mutable state is verified by TDH.IMPORT.STATE.TD against target platform capabilities and Intel TDX Module version, capabilities and configuration.

10 5.4.19.3.2. Enumeration

Availability of TDH.IMPORT.STATE.TD is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.IMPORT.STATE.TD returns a TDX_OPERAND_INVALID(RAX) status.

5.4.19.3.3. Interruptibility

- 15 If a pending interrupt is detected during operation, TDH.IMPORT.STATE.TD returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The host VMM is expected to resume it, by calling it with R10.RESUME set to 1. If the host VMM cannot resume TDH.IMPORT.STATE.TD for some reason, it should abort the import session (TDH.IMPORT.ABORT).

5.4.19.3.4. Import Abort

- 20 A failed TDH.IMPORT.STATE.TD marks (except in cases where the imported TD state has not been modified) the target TD as IMPORT_FAILED; by design, it will not run. This is indicated by the FATAL bit (61) of the completion status returned in RAX.

5.4.19.3.5. Aspects of MAC Calculation Compatibility on TDX Module Update

- 25 If TDH.IMPORT.STATE.TD was interrupted, and later the TDX Module was updated before TDH.IMPORT.STATE.TD was resumed, there could be incompatibility issues with the format of the intermediate MRTD MAC context, held as part of the migration stream context (MIGSC), between the original and the new TD module.

- On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.IMPORT.STATE.TD returns a TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT status. In this case, the host VMM is expected to abort the migration session and may restart it. For details, see the [Base Spec] section titled “Compatibility Aspects of TD-Preserving Update”.

- 30 If the host VMM did not configure the TDX Module to detect such incompatibility, it will not be detected by TDH.IMPORT.STATE.TD. However, TDH.IMPORT.STATE.TD will detect that the MAC is incorrect and will return a TDX_INCORRECT_MBMD_MAC error.

5.4.19.3.6. S4 Resumption Abort

In addition to aborting the import of the current TD, an abort of an S4 resumption session also generates a new S4 anti-replay nonce, preventing a new S4 resumption session from starting.

5.4.19.4. Operands Information

- 5 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.76: TDH.IMPORT.STATE.VP Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R8	HPA	MBMD	MBMD	R	Shared	128B	None	None	None
Explicit	R9	HPA	Page list	PAGE_LIST	R	Shared	4KB	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Explicit	N/A	HPA	Source pages (via page list)	Blob	R	Shared	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Service TD bindings table	N/A	R	Hidden	N/A	Exclusive(i)	N/A	N/A

5.4.19.5. Completion Status Codes

10

Table 5.77: TDH.IMPORT.STATE.TD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT	
TDX_INTERRUPTED_RESUMABLE	
TDX_INCORRECT_MBMD_MAC	
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_MBMD	
TDX_INVALID_METADATA_LIST_HEADER	
TDX_INVALID_RESUMPTION	

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	Field ID or sequence header is returned in RCX
TDX_METADATA_FIELD_NOT_WRITABLE	Field ID is returned in RCX
TDX_METADATA_FIELD_VALUE_NOT_VALID	Field ID is returned in RCX
TDX_METADATA_LIST_OVERFLOW	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_REQUIRED_METADATA_FIELD_MISSING	Required field ID is returned in RCX
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.20. TDH.IMPORT.STATE.VP Leaf

TDH.IMPORT.STATE.VP imports the VCPU-scope mutable state as a multi-page migration bundle.

5.4.20.1. Input Operands

Table 5.78: TDH.IMPORT.STATE.VP Input Operands Definition

Operand		Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 87
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	TDVPR	HPA of the destination TD VCPU's TDVPR page (HKID bits must be 0)		
R8	MBMD	HPA and size of memory of an MBMD structure in memory:		
		Bits	Name	Description
		51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
		63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R9	PAGE_LIST_INFO	Migration buffers list information – see 3.13.6.1		
R10	MIG_STREAM	Migration stream and resume flag:		
		Bits	Name	Description
		15:0	MIGS_INDEX	Migration stream index If N migration streams have been created by TDH.MIG.STREAM.CREATE, then MIGS_INDEX must be lower than N-1.
		62:16	RESERVED	Reserved: must be 0
		63	RESUME	0: This is a new invocation 1: This is resumption of a previously interrupted operation

5.4.20.2. Output Operands

Table 5.79: TDH.IMPORT.STATE.VP Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
RCX	EXTENDED_ERROR_INFO1	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RCX is unmodified.

Operand	Name	Description
		In case of an error related to non-memory state field import, as indicated by RAX, RCX contains the offending field identifier. See the status codes table below. In other cases, RCX returns 0.
RDX	EXTENDED_ERROR_INFO2	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RDX is unmodified. In other cases, RDX returns 0.
AVX, AVX2 and AVX512 state		May be reset to the architectural RESET state
Other		Unmodified

5.4.20.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.20.3.1. Overview

TDH.IMPORT.STATE.VP imports the VCPU-scope mutable state migration bundle previously exported by TDH.EXPORT.STATE.VP. The migration bundle includes an MBMD and a set of 4KB pages.

VCPU-scope mutable state is verified by TDH.IMPORT.STATE.VP against target platform capabilities and Intel TDX Module version, capabilities and configuration.

5.4.20.3.2. Enumeration

Availability of TDH.IMPORT.STATE.VP is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.IMPORT.STATE.VP returns a TDX_OPERAND_INVALID(RAX) status.

5.4.20.3.3. Interruptibility

- 15 If a pending interrupt is detected during operation, TDH.IMPORT.STATE.VP returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The host VMM is expected to resume it, by calling it with R10.RESUME set to 1. If the host VMM cannot resume TDH.IMPORT.STATE.VP for some reason, it should abort the import session (TDH.IMPORT.ABORT).

5.4.20.3.4. Aspects of MAC Calculation Compatibility on TDX Module Update

- 20 If TDH.IMPORT.STATE.VP was interrupted, and later the TDX Module was updated before TDH.IMPORT.STATE.VP was resumed, there could be incompatibility issues with the format of the intermediate MRTD MAC context, held as part of the migration stream context (MIGSC), between the original and the new TD module.

- On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.IMPORT.STATE.VP returns a TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT status. In this case, the host VMM is
25 expected to abort the migration session and may restart it. For details, see the [Base Spec] section titled “Compatibility Aspects of TD-Preserving Update”.

If the host VMM did not configure the TDX Module to detect such incompatibility, it will not be detected by TDH.IMPORT.STATE.VP. However, TDH.IMPORT.STATE.VP will detect that the MAC is incorrect and will return a TDX_INCORRECT_MBMD_MAC error.

5.4.20.3.5. Import Abort

A failed TDH.IMPORT.STATE.VP marks (except in cases where the imported TD state has not been modified) the target TD as IMPORT_FAILED; by design, it will not run. This is indicated by the FATAL bit (61) of the completion status returned in RAX.

5.4.20.3.6. S4 Resumption Abort

In addition to aborting the import of the current TD, an abort of an S4 resumption session also generates a new S4 anti-replay nonce, preventing a new S4 resumption session from starting.

5.4.20.3.7. VCPU Association

- 5 TDH.IMPORT.VP associates the TD VCPU with the current LP. This requires that the VCPU will not be associated with another LP – for details, see the [TDX Module Base Spec].

5.4.20.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

10

Table 5.80: TDH.IMPORT.STATE.VP Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDVPR page	TDVPS	RW	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R8	HPA	MBMD	MBMD	R	Shared	128B	None	None	None
Explicit	R9	HPA	Page list	PAGE_LIST	R	Shared	4KB	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Explicit	N/A	HPA	Source pages (via page list)	Blob	R	Shared	4KB	None	None	None
Implicit	N/A	HPA	TDR page	TDR	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	None	N/A	N/A

5.4.20.5. Completion Status Codes

Table 5.81: TDH.IMPORT.STATE.VP Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_ALL_VCPUS_IMPORTED	
TDX_INCOMPATIBLE_MBMD_MAC_CONTEXT	
TDX_INTERRUPTED_RESUMABLE	
TDX_INTERRUPTED_RESUMABLE	
TDX_INCORRECT_MBMD_MAC	
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_MBMD	
TDX_INVALID_METADATA_LIST_HEADER	

Completion Status Code	Description
TDX_INVALID_RESUMPTION	
TDX_METADATA_FIELD_ID_INCORRECT	Field ID or sequence header is returned in RCX
TDX_METADATA_FIELD_NOT_WRITABLE	Field ID is returned in RCX
TDX_METADATA_FIELD_VALUE_NOT_VALID	Field ID is returned in RCX
TDX_METADATA_LIST_OVERFLOW	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_REQUIRED_METADATA_FIELD_MISSING	Required field ID is returned in RCX
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_VCPU_STATE_INCORRECT	If this is the initial call to TDH.IMPORT.STATE.VP for this VCPU, the VCPU is expected to be in the VCPU_READY state. If this is a resumption of an interrupted call, the VCPU is expected to be in the VCPU_IMPORT state . For details, see the [Base Spec] discussion of VPCU transitions.
TDX_X2APIC_ID_NOT_UNIQUE	

5.4.21. TDH.IMPORT.TRACK Leaf

TDH.IMPORT.TRACK consumes an epoch token received from the source platform. It ends the current in-order import phase epoch and either starts a new epoch or starts the out-of-order import phase.

5.4.21.1. Input Operands

Table 5.82: TDH.IMPORT.TRACK Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 84
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	HPA of the destination TD's TDR page (HKID bits must be 0)		
R8	HPA and size of memory of an MBMD structure in memory:		
	Bits	Name	Description
	51:0	HPA	Bits 51:0 of the host physical address (including HKID bits) HPA must be aligned on 128 bytes.
	63:52	Size	Size of the memory buffer containing MBMD, in bytes The buffer size must be at least the maximum MBMD size, which is 128 bytes. See 3.13.1 for details.
R10	Migration stream index – must be 0		

5.4.21.2. Output Operands

Table 5.83: TDH.IMPORT.TRACK Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code, see 5.4.1
AVX, AVX2 and AVX512 state	May be reset to the architectural RESET state
Other	Unmodified

5.4.21.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.21.3.1. Overview

TDH.IMPORT.TRACK parses an epoch token received from the source platform. It checks that the epoch number indicated by the token is correct, and that all migration bundles indicated by the token have been received.

If successful, it ends the current import epoch, and as indicated by the epoch token either starts a new epoch or starts the out-of-order import phase.

5.4.21.3.2. Enumeration

Availability of TDH.IMPORT.TRACK is enumerated by either TDX_FEATURES0.TD_MIGRATION (bit 0) or TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.IMPORT.TRACK returns a TDX_OPERAND_INVALID(RAX) status.

5.4.21.3.3. Import Abort

A failure may mark the target TD as IMPORT_FAILED; by design, it will not run. This is indicated by the FATAL bit (61) of the completion status returned in RAX.

5.4.21.3.4. S4 Resumption

When called during an S4 resumption session, TDH.IMPORT.TRACK only supports transitioning to the out-of-order import phase, with a start token MBMD generated by TDH.EXPORT.TRACK with IN_ORDER_DONE specified.

If an error is encountered, then in addition to aborting the import of the current TD, an abort of an S4 resumption session also generates a new S4 anti-replay nonce, preventing a new S4 resumption session from starting.

5.4.21.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.84: TDH.IMPORT.TRACK Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R8	HPA	MBMD buffer	MBMD	R	Shared	128B	None	None	None
Explicit	R10	Index	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.21.5. Completion Status Codes

Table 5.85: TDH.IMPORT.TRACK Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCORRECT_MBMD_MAC	
TDX_INVALID_MBMD	
TDX_MIGRATION_STREAM_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	

TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SOME_VCPUS_NOT_MIGRATED	
TDX_SUCCESS	Operation is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.22. TDH.INTR.CONFIG Leaf

Unreleased Feature: This section is related to Enhanced Interrupt Virtualization, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

- 5 Allocate and initialize interrupt-related TD-scope metadata for one specific L1 or L2 VM within a TD.

5.4.22.1. Input Operands

Table 5.86: TDH.INTR.CONFIG Input Operands Definition

Operand	Description			
RAX	SEAMCALL instruction leaf number and version, see 5.4.1			
	Bits	Field	Description	
	15:0	Leaf Number	Selects the SEAMCALL interface function: 62	
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0	
	63:24	Reserved	Must be 0	
RCX	TD handle and flags:			
	Bits	Name	Description	
	11:0	Reserved	Reserved: must be 0	
	51:12	TDR_HPA	Bits 51:12 of the host physical address of the parent TDR page (HKID bits must be 0)	
	53:52	VM	Virtual machine index	
	63:54	Reserved	Reserved: must be 0	
RDX	PIDPT (Posted Interrupt Descriptor Pointers Table) information:			
	Bits	Name	Description	
	11:0	PIDPT_NUM_PAGES	The number of 4KB contiguous physical pages which will be used as PIDPT If PIDPT_NUM_PAGES is 0, no PIDPT is allocated and IPI virtualization is not supported. PID_MODE (see below) may be either REG_PID (for L1) or SHR_PID. Else, PID_MODE must be either SEC_PID or DUAL_PID.	
	51:12	PIDPT_HPA	Bits 51:12 of the host physical address (HKID bits must be 0) of multiple 4KB contiguous physical pages which will be used as PIDPT If PIDPT_NUM_PAGES is 0, PIDPT_HPA must be 0.	
	63:52	Reserved	Reserved: must be 0	
R8	Posted interrupts configuration:			
	1:0	PID_MODE	PID mode:	
			Value	Name
		0	REG_PID	Regular PID – allowed only for L1

Operand	Description				
			1	SEC_PID	Secure PID
			2	SHR_PID	Shared PID
			3	DUAL_PID	Dual PID: Secure PID and Shared PID
			Other	Reserved	Reserved
	6:2	Reserved	Reserved: must be 0		
	7	MAIN_NV_SHARED	0	MAIN_NV value, if not 0, is unique among all MAIN_NVs and SHR_NVs of a VM of this TD	
			1	MAIN_NV value is assigned to at least one other MAIN_NV or SHR_NV of a VM of this TD	
	15:8	MAIN_NV	Main PID notification vector If PID_MODE is REG_PID, MAIN_NV must either be 0 (indicating no notification vector) or between 31 and 255. Else, if PID_MODE is SEC_PID or DUAL_PID, MAIN_NV must be between 31 and 255. Else, MAIN_NV must be 0.		
	23:16	SHR_NV	Shared PID notification vector If PID_MODE is SHR_PID or DUAL_PID, SHR_NV must either be 0 (indicating no notification vector) or between 31 and 255. Else, SHR_NV must be 0.		
	63:24	Reserved	Reserved: must be 0		

5.4.22.2. Output Operands

Table 5.87: TDH.INTR.CONFIG Output Operands Definition

Operand	Description		
RAX	SEAMCALL instruction return code – see 5.4.1		
RDX	Updated PIDPT information:		
	Bits	Name	Description
	11:0	PIDPT_NUM_PAGES	The remaining number of 4KB contiguous physical pages to be used as PIDPT
	51:12	PIDPT_HPA	Updated bits 51:12 of the host physical address (HKID bits must be 0) of multiple 4KB contiguous physical pages to be used as PIDPT
	63:52	Reserved	Reserved: must be 0
Other	Unmodified		

5 5.4.22.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.22.3.1. Overview

TDH.INTR.CONFIG allocates and configures enhance interrupt virtualization resources and metadata for a specific VM (L1 or L2) within a TD.

5.4.22.3.2. Enumeration

- 5 Support of TDH.INTR.CONFIG is enumerated by TDX_FEATURES0.ENHANCED_INTR_VIRTUALIZATION (bit 45), readable by TDH.SYS.RD*.

5.4.22.3.3. Legacy Compatibility

- 10 TDH.INTR.CONFIG is only allowed for L1 if the legacy method of posted interrupt configuration, by setting the TD VMCS' pin-based execution controls' "process posted interrupts" bit using TDH.VP.WR, has not been used. Once THD.INTR.CONFIG for L1 completes successfully, only the "posted interrupt descriptor address" VMCS field can be written.

5.4.22.3.4. Configuration During TD Build and TD Run Time

TDH.INIT.CONFIG may be called at any time after TD initialization (TDH.MNG.INIT), with the following restrictions:

- TDH.INTR.CONFIG may only be completed successfully once per L1 and each L2 VM.
- 15 • TDH.INTR.CONFIG may not be called for an L2 VM once that VM was entered for the first time.

L1 configuration becomes effective on the TD entry following TDH.INIT.CONFIG successful completion. If done after TD build, when L1 may already be running, the host VMM may send IPIs to the TD's VCPUs to help ensure the configuration is effective.

5.4.22.3.5. Configuration or Reconfiguration During or After TD Migration

- 20 Most posted interrupt resources and metadata allocated and configured by TDH.INTR.CONFIG are not migrated. If TDH.INTR.CONFIG was called on the source platform for a certain VM (L1 or L2) before export, the host VMM on the destination platform must call TDH.INTR.CONFIG to reallocate and reconfigure the posted interrupt resources for that VM. This must be done following TD state import by TDH.IMPORT.STATE.TD, and before VCPU state is imported by TDH.IMPORT.STATE.VP.
- 25 If TDH.INTR.CONFIG was not called on the source platform for a certain VM (L1 or L2) before export, the host VMM on the destination platform may call TDH.INTR.CONFIG for that VM after import is committed (by TDH.IMPORT, with the same restrictions as discussed in 5.4.22.3.4 above).

5.4.22.3.6. PID Configurations for Posted Interrupts and IPI Virtualization

- 30 The table below summarizes the available PID configurations for posted interrupts and IPI virtualization. For details, see the [Interrupt Virtualization Spec].

Table 5.88: PID Configurations

Name	Configuration	Posted Interrupts	IPI Virtualization
N/A	No PID (TDH.INTR.CONFIG not called)	Not enabled	Not enabled
REG_PID	Regular PID in Shared Memory (L1 only)	Enabled, not filtered	Not enabled
SHR_PID	Shared PID Only	Enabled, filtered by PIR_MASK	Not enabled
SEC_PID	Secure PID Only	Not enabled (except for IPI)	Enabled
DUAL_PID	Secure PID + Shared PID	Enabled, filtered by PIR_MASK	Enabled

5.4.22.3.7. Notification Vectors

- 35 Notification vector MAIN_NV and SHR_NV may be configured with unique, non-unique or null values. This trades performance and functionality vs. physical interrupt vector space consumption. The host VMM must specify, using the MAIN_NV_SHARED input flag, whether the configured MAIN_NV value is unique or not. If specified as a unique value, the TDX Module checks that all other MAIN_NV or SHR_NV values configured for this TD are different.

For details, see the section titled "Notification Vector Uniqueness and its Implication on Performance and Functionality" in the [Interrupt Virtualization Spec].

5.4.22.3.8. Interruptibility

TDH.INTR.CONFIG is interruptible. If a pending interrupt is detected during operation, TDH.INTR.CONFIG returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The PIDPT information in RCX is updated to reflect the operation so far.

TDH.INTR.CONFIG is designed to be invoked in a loop until all required PIDPT pages have been added:

- 5 1. Call TDH.INTR.CONFIG.
2. While RAX indicates TDX_INTERRUPTED_RESUMABLE:
 - 2.1. Call TDH.INTR.CONFIG with the GPR values as returned by the previous call.
 - 2.2. If an error indication other than TDX_INTERRUPTED_RESUMABLE is returned, abort.

5.4.22.3.9. Control Structure Pages

- 10 Physical PIDPT pages allocated by TDH.INTR.CONFIG can only be reclaimed as part of the TD's teardown sequence.

5.4.22.3.10. Error Handling

If TDH.INTR.CONFIG returns with an error status, it may be called again. This is especially important for transient errors (e.g., TDX_OPERNAD_BUSY) or errors requiring some host VMM operation (e.g., missing PAMT pages when Dynamic PAMT is used).

5.4.22.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.89: TDH.INTR.CONFIG Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ¹³
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared	None
Explicit	RDX	HPA	PIDPT Pages	PIDPT	RW	Opaque	4KB	Exclusive	Shared	Shared	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive	N/A	N/A	None

5.4.22.5. Completion Status Codes**Table 5.90: TDH.INTR.CONFIG Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_ENHANCED_INTR_VIRT_CONFIGURED	
TDX_INTR_VIRT_CONFIG_ALREADY_DONE	
TDX_LEGACY_INTR_VIRT_CONFIGURED	
TDX_PIDPT_SIZE_TOO_SMALL	
TDX_PID_MODE_IMPORT_MISMATCH	
TDX_SUCCESS	
TDX_VCPUS_ALREADY_IMPORTED	

¹³ ACT is implemented only on client platforms. This is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

Completion Status Code	Description
Unreleased Feature: This list is not comprehensive	

5.4.23. TDH.MEM.PAGE.ADD Leaf

Add a 4KB private page to a TD, mapped to the specified GPA, filled with the given page image and encrypted using the TD ephemeral key, and update the TD measurement with the page properties.

5.4.23.1. Input Operands

Table 5.91: TDH.MEM.PAGE.ADD Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 2
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the EPT entry that will map the new page – see 3.6.1: must be 0
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address to be mapped for the new Secure EPT page
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		
R8	Host physical address of the target page to be added to the TD (HKID bits must be 0)		
R9	Host physical address (including HKID bits) of the source page image		

5.4.23.2. Output Operands

Table 5.92: TDH.MEM.PAGE.ADD Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.

Operand	Description
RDX	Extended error information part 2 In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
Other	Unmodified

5.4.23.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.23.3.1. Overview

TDH.MEM.PAGE.ADD adds a 4KB private page to a TD and maps it to the provided GPA. It copies the provided source page image to specified physical page using the TD's ephemeral private key and updates the TD measurement with the page properties. TDH.MEM.PAGE.ADD is used during TD build before the TD is initialized.

5.4.23.3.2. In-Place Add

It is allowed to set the TD page HPA in R8 to the same address as the source page HPA in R9. In this case the source page is converted to be a TD private page.

5.4.23.3.3. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.23.3.4. TD Measurement Register (MRTD) Extension

TDH.MEM.PAGE.ADD extends the TD's MRTD with the target page GPA. Extension is done using SHA384 with a 128B extension buffer composed as follows:

- Bytes 0 through 11 contain the ASCII string "MEM.PAGE.ADD".
- Bytes 16 through 23 contain the GPA (in little-endian format).
- All the other bytes contain 0.

5.4.23.3.5. MRTD Extension Compatibility Aspects

If MRTD was initialized by TDH.MNG.INIT, and later the TDX Module was updated before the current TDH.MEM.PAGE.ADD was called, there could be incompatibility issues with the intermediate MRTD context format between the original and the new TD module. On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.MEM.PAGE.ADD returns a TDX_INCOMPATIBLE_MRTD_CONTEXT status. In this case, the host VMM is expected to tear down the TD and rebuild it. For details, see the [Base Spec] section titled "Compatibility Aspects of TD-Preserving Update".

5.4.23.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.93: TDH.MEM.PAGE.ADD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ¹⁴
Explicit	RCX	GPA	TD private page (GPA) ¹⁵	Blob	RW	Private	4KB	N/A	N/A	N/A	N/A
Explicit	RDX	HPA	TDR page	Blob	RW	Opaque	4KB	Exclusive	Shared	Shared	None
Explicit	R8	HPA	TD private page (HPA) ¹⁵	Blob	RW	Private	4KB	Exclusive	Shared	Shared	Exclusive
Explicit	R9	HPA	Source page	Blob	R	Shared	4KB	None	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A	None
Implicit	N/A	GPA	Secure EPT tree	N/A	RW	Private	N/A	Exclusive(i)	N/A	N/A	None
Implicit	N/A	GPA	Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A	None

5.4.23.5. Completion Status Codes

Table 5.94: TDH.MEM.PAGE.ADD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_INCOMPATIBLE_MRTD_CONTEXT	
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.PAGE.ADD is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

¹⁴ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

¹⁵ RCX and R8 denote the same TD private page operand, using HPA and GPA respectively

5.4.24. TDH.MEM.PAGE.AUG Leaf

Dynamically add a 4KB or a 2MB private page to an initialized TD, mapped to the specified GPAs.

5.4.24.1. Input Operands

Table 5.95: TDH.MEM.PAGE.AUG Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 6
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the EPT entry that will map the new page – see 3.6.1: must be 0 (4KB) or 1 (2MB)
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address to be mapped for the new Secure EPT page
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		
R8	Host physical address of the target page to be added to the TD (HKID bits must be 0)		

5.4.24.2. Output Operands

Table 5.96: TDH.MEM.PAGE.AUG Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.

Operand	Description
Other	Unmodified

5.4.24.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.24.3.1. Overview

TDH.MEM.PAGE.AUG adds a 4KB or a 2MB private page to a TD and maps it to the provided GPA. The new page is mapped in a pending state and can be accessed only by the guest TD after it accepts it using TDCALL(TDG.MEM.PAGE.ACCEPT). TDH.MEM.PAGE.AUG does not initialize the new page and does not update the TD measurement.

5.4.24.3.2. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing (applies only for 4KB pages). The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.24.4. Operands Information

- 15 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.97: TDH.MEM.PAGE.AUG Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ¹⁶
Explicit	RCX	GPA	TD private page (GPA) ¹⁷	Blob	None	Private	2 ^{12+9*Level} Bytes	N/A	N/A	N/A	N/A
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared	None
Explicit	R8	HPA	TD private page (HPA) ¹⁷	Blob	None	Private	2 ^{12+9*Level} Bytes	Exclusive	Shared ¹⁸	Shared	Exclusive
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	N/A
Implicit	N/A	GPA	Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A	N/A
Implicit	N/A	GPA	Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A	N/A

¹⁶ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

¹⁷ RCX and R8 denote the same TD private page operand, using HPA and GPA respectively

¹⁸ Applicable for 4KB pages only

5.4.24.5. Completion Status Codes**Table 5.98: TDH.MEM.PAGE.AUG Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.PAGE.AUG is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.25. TDH.MEM.PAGE.DEMOTE Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 TDH.MEM.PAGE.DEMOTE splits a single 2MB page into 512 4KB pages, or a single 1GB page into 512 2MB pages. The leaf SEPT entry that mapped the large page changes to a non-leaf entry pointing to a new SEPT page which maps the 512 small pages.

If the TDX Module is configured to use Dynamic PAMT and the large page level is 1 (2MB), the leaf PAMT entry that was associated with the large page's HPA changes to a non-leaf PAMT entry pointing to a pair of PAMT pages that are associated with the 512 small pages.

10

5.4.25.1. Input Operands

Table 5.99: TDH.MEM.PAGE.DEMOTE Input Operands Definition

Operand	Description				
RAX	SEAMCALL instruction leaf number and version, see 5.4.1				
	Bits	Field	Description		
	15:0	Leaf Number	Selects the SEAMCALL interface function: 15		
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0		
	63:24	Reserved	Must be 0		
RCX	EPT mapping information:				
	Bits	Name	Description		
	2:0	Level	Level of the Secure EPT entry that maps the large page to be split: either 1 (2MB) or 2 (1GB) – see 3.6.1		
	11:3	Reserved	Reserved: must be 0		
	51:12	GPA	Bits 51:12 of the guest physical address of the large page to be split Depending on the level, the following least significant bits must be 0: Level 1 (2MB): Bits 20:12 Level 2 (1GB): Bits 29:12		
	63:52	Reserved	Reserved: must be 0		
RDX	TD handle and flags:				
	Bits	Name	Description		
	0	L2_SEPT_ADD_MODE	New L2 SEPT pages addition mode:		
			Value	Name	Description
			0	DENSE	New L2 SEPT pages are added, if provided by R9, R10 or R11.

Operand	Description				
			1	SPARSE	New L2 SEPT pages are added, if provided by R9, R10 or R11, but only for L2 VMs where the L1 VMM has created a page alias (using TDG.MEM.PAGE.ATTR.WR).
			In both cases, a new L2 SEPT must be provided for L2 VMs where a page alias exists. This bit is ignored if the TD has no L2 VMs.		
	11:1	Reserved	Reserved: must be 0		
	51:12	TDR_HPA	Bits 51:12 of the host physical address of the parent TDR page (HKID bits must be 0)		
	63:52	Reserved	Reserved: must be 0		
R8	Host physical address of the new L1 Secure EPT page to be added to the TD (HKID bits must be 0)				
R9	If the number of L2 VMs is ≥ 1, R9 contains the host physical address of the new Secure EPT page to be added to L2 VM #1's SEPT tree (HKID bits must be 0). Else (the number of L2 VMs is 0), R9 is ignored. If the value of R9 is NULL_PA (-1), no new SEPT page is added to L2 VM #1's SEPT. If the demoted TD private page has an L2 page alias for L2 VM #1, this is an error. Else, bit 63 of R9 is ignored. If L2_SEPT_ADD_MODE is 1, the new SEPT page is only used if the demoted TD private page has an L2 page alias for L2 VM #1. Else, the new SEPT page is always used.				
R10	If the number of L2 VMs is ≥ 2, R10 contains the host physical address of the new Secure EPT page to be added to L2 VM #2's SEPT tree (HKID bits must be 0). Else (the number of L2 VMs is 0 or 1), R10 is ignored. If the value of R10 is NULL_PA (-1), no new SEPT page is added to L2 VM #2's SEPT. If the demoted TD private page has an L2 page alias for L2 VM #2, this is an error. Else, bit 63 of R10 is ignored. If L2_SEPT_ADD_MODE is 1, the new SEPT page is only used if the demoted TD private page has an L2 page alias for L2 VM #2. Else, the new SEPT page is always used.				
R11	If the number of L2 VMs is ≥ 3, R11 contains the host physical address of the new Secure EPT page to be added to L2 VM #3's SEPT tree (HKID bits must be 0). Else (the number of L2 VMs is 0, 1 or 2), R11 is ignored. If the value of R11 is NULL_PA (-1), no new SEPT page is added to L2 VM #3's SEPT. If the demoted TD private page has an L2 page alias for L2 VM #3, this is an error. Else, bit 63 of R11 is ignored. If L2_SEPT_ADD_MODE is 1, the new SEPT page is only used if the demoted TD private page has an L2 page alias for L2 VM #3. Else, the new SEPT page is always used.				
R12	If the TDX Module is configured to use Dynamic PAMT and the large page level is 1 (2MB), R12 contains the host physical address of a new PAMT page (HKID bits must be 0). Else, R12 is ignored.				
R13	If the TDX Module is configured to use Dynamic PAMT and the large page level is 1 (2MB), R13 contains the host physical address of a new PAMT page (HKID bits must be 0). Else, R13 is ignored.				

5.4.25.2. Output Operands

Table 5.100: TDH.MEM.PAGE.DEMOTE Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESTARTABLE, RCX is unmodified. Else, RCX returns extended error information part 1. In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page; it may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESTARTABLE, RDX is unmodified. Else, RDX returns extended error information part 2. In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
R9	If TDH.MEM.PAGE.DEMOTE terminated successfully, the number of L2 VMs is ≥ 1 and the page whose HPA was provided in R9 was not used as an SEPT page for any reason, R9 is updated with bit 63 set to 1. Else, R9 is unmodified.
R10	If TDH.MEM.PAGE.DEMOTE terminated successfully, the number of L2 VMs is ≥ 2 and the page whose HPA was provided in R10 was not used as an SEPT page for any reason, R10 is updated with bit 63 set to 1. Else, R10 is unmodified.
R11	If TDH.MEM.PAGE.DEMOTE terminated successfully, the number of L2 VMs is ≥ 3 and the page whose HPA was provided in R11 was not used as an SEPT page for any reason, R11 is updated with bit 63 set to 1. Else, R11 is unmodified.
Other	Unmodified

5.4.25.3. Leaf Function Description

- 5 **Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.25.3.1. Overview

- 10 TDH.MEM.PAGE.DEMOTE splits a large TD private page (2MB or 1GB) into 512 small pages (4KB or 2MB, respectively) and adds a new Secure EPT page to map those small pages. If the large page is mapped in any L2 SEPTs, TDH.MEM.PAGE.DEMOTE splits those mapping and adds new L2 Secure EPT pages to map the demoted page.

5.4.25.3.2. Enumeration

TDH.MEM.PAGE.DEMOTE support of non-blocking mapping resize is enumerated by TDX_FEATURES0.NON_BLOCKING_RESIZE (bit 35), readable using TDH.SYS.RD*.

Support of dynamic PAMT is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36).

Support of no interruption if the TD is not partitioned in enumerated by TDX_FEATURES0. ENHANCED_DEMOTE_INTERRUPTIBILITY (bit 51).

5.4.25.3.3. Blocking and TLB Tracking

If the TDX Module supports non-blocking mapping resize, no blocking and tracking of the demoted page is required.

- 5 Else, if the TD may be running, the demoted page must be blocked and TLB tracked. Else (e.g., TDH.MR.FINALIZE has not yet been executed, or the TD has been paused for export), no blocking and tracking is required.

5.4.25.3.4. New SEPT Pages

- 10 If the TDX Module supports non-blocking mapping resize, then the new SEPT pages specified by R8, R9, R10 and R11 may be either 4KB physical pages not currently used by TDX, or they may be PT_TR pages (i.e., former SEPT pages converted by TDH.MEM.PAGE.PROMOTE) owned by the specified TD. TDH.MEM.PAGE.DEMOTE checks PT_TR pages for TLB tracking.

Otherwise (non-blocking mapping resize is not supported), the new SEPT pages must be 4KB physical pages not currently used by TDX.

5.4.25.3.5. L2 SEPT Population

- 15 TDH.MEM.PAGE.DEMOTE supports multiple host VMM policies for populating the L2 SEPT trees.

- Dense mode is when the host VMM maintains an L2 SEPT page for each L1 SEPT page. This mode is selected by setting L2_SEPT_ADD_MODE to 0.
 - Sparse mode is when the host VMM only maintains an L2 SEPT page for a certain L1 SEPT page on demand, i.e., when there's a need to map a TD private page in an L2 VM's GPA space. This mode is selected by setting L2_SEPT_ADD_MODE to 1. The host VMM provides new SEPT pages, but they are only used if a page alias exists for the relevant L2 VM.
- 20

The host VMM may also choose to maintain L2 SEPT trees only for a subset of the L2 VMs (e.g., if a TD is created with a certain number of L2 VMs but not all of them are currently in use). The host VMM can do so by providing NULL_PA as the new SEPT page(s) HPA.

5.4.25.3.6. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for one of the added SEPT pages. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

- 30 Note that this does not apply to the demoted page itself. TDH.MEM.PAGE.DEMOTE always requires a pair of PAMT pages to be provided (in R12 and R13) if the page is demoted to 512 4KB pages.

5.4.25.3.7. SEPT HPA Arguments on Input and Output

The table below shows the values of the SEPT HPA arguments in R9 – R11 when no error occurs (RAX returns TDX_SUCCESS).

Table 5.101: Meaning of TDH.MEM.PAGE.DEMOTE's SEPT HPA Arguments on Input and Output (No Error)

Value	R9 – R11 on Input	R9 – R11 on Output
NULL_PA (-1)	No new SEPT page to add	Unmodified
Bits 62:0: Valid HPA, HKID bits are 0 Bit 63: 0	Bits 62:0: HPA of new SEPT page to add Bit 63: Ignored	TDH.MEM.PAGE.DEMOTE terminated successfully and the new SEPT page has been added
Bits 62:0: Valid HPA, HKID bits are 0 Bit 63: 1		TDH.MEM.PAGE.DEMOTE terminated successfully and the new SEPT page has not been added

35

5.4.25.3.8. Interaction with Non-Blocking Export

If the page state before the demote operation was MAPPED and a non-blocking export session is in the LIVE_EXPORT phase, TDH.MEM.PAGE.DEMOTE sets all the small pages' Dirty bits. Otherwise, it clears them.

5.4.25.3.9. Interruptibility

If the TD is not partitioned (i.e., it has been configured with no L2 VMs), and the TDX Module enumerates TDX_FEATURES0.ENHANCED_DEMOTE_INTERRUPTIBILITY as 1, TDH.MEM.PAGE.DEMOTE is not interruptible.

Else, TDH.MEM.PAGE.DEMOTE is interruptible but not resumable. If a pending interrupt is detected during operation, TDH.MEM.PAGE.DEMOTE returns with a TDX_INTERRUPTED_RESTARTABLE status in RAX. No demote operation is done and no output operands except RAX are modified.

In such cases, TDH.MEM.PAGE.DEMOTE should be invoked in a loop until it terminates successfully. The host VMM should be designed to avoid cases where interrupt storms prevent successful completion of TDH.MEM.PAGE.DEMOTE.

5.4.25.4. Operands Information

- 10 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.102: TDH.MEM.PAGE.DEMOTE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource Name	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ¹⁹
Explicit	RCX	GPA and Level	TD private page to split	Blob	None	Private	$2^{12+9*\text{level}}$ bytes	Exclusive	None	None	None
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared	None
Explicit	R8	HPA	New L1 Secure EPT page	SEPT_PAGE	RW	Private	4KB	Exclusive	Shared	Shared	Exclusive
Explicit	R9, R10, R11	HPA	New L2 Secure EPT pages	SEPT_PAGE	RW	Private	4KB	Exclusive	Shared	Shared	Exclusive
Explicit	R12, R13	HPA	New PAMT pages ²⁰	PAMT_PAGE	RW	Opaque	4KB	Exclusive	Shared	Shared	Exclusive
Implicit	N/A	HPA	HPA range to split ²¹	N/A	RW	Opaque	N/A	Exclusive ²²	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	None
Implicit	N/A	GPA	L1 Secure EPT Tree	N/A	RW	Private	N/A	Shared	N/A	N/A	None
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A	None
Implicit	N/A	GPA	L2 Secure EPT Trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A	None

¹⁹ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

²⁰ Only if the TDX Module is configured to use Dynamic PAMT and the large page level is 1 (2MB).

²¹ Only if the TDX Module is configured to use Dynamic PAMT and the large page level is 1 (2MB).

²² Concurrency is enforced by locking the parent **non-leaf** PAMT entry in the PAMT tree, which points to the new page.

Explicit/ Implicit	Reg.	Ref Type	Resource Name	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ¹⁹
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A	None

5.4.25.5. Completion Status Codes

Table 5.103: TDH.MEM.PAGE.DEMOTE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_GPA_RANGE_NOT_BLOCKED	
TDX_INTERRUPTED_RESTARTABLE	TDH.MEM.PAGE.DEMOTE's operation has been interrupted by an external event; it may be restarted (from its beginning) by calling it again.
TDX_L2_SEPT_PAGE_NOT_PROVIDED	
TDX_L2_SEPT_WALK_FAILED	
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PAGE_NOT_FREE	
TDX_SUCCESS	TDH.MEM.PAGE.DEMOTE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	

5.4.26. TDH.MEM.PAGE.PROMOTE Leaf

TDH.MEM.PAGE.PROMOTE merges 512 consecutive 4KB pages into a single 2MB page, or 512 consecutive 2MB pages into a single 1GB page. The L1 and any L2 SEPT pages which mapped the 512 small pages are removed, and the non-leaf SEPT entries that mapped the whole large GPA range change to leaf entries.

- 5 If the TDX Module is configured to use Dynamic PAMT and the merged page level is 1 (2MB), the pair of PAMT pages that were associated with the 512 small pages is removed, and the non-leaf PAMT entry that was associated with the whole large HPA range changes to a leaf entry.

5.4.26.1. Input Operands

Table 5.104: TDH.MEM.PAGE.PROMOTE Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 23
	23:16	Version Number	Selects the SEAMCALL interface function version Versions 0 and 1 are supported. See enumeration details below.
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the Secure EPT entry that will map the merged large page: either 1 (2MB) or 2 (1GB) (see 3.6.1)
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address of the merged large page Depending on the level, the following least significant bits must be 0: Level 1 (2MB): Bits 20:12 Level 2 (1GB): Bits 29:12
	63:52	Reserved	Reserved: must be 0
RDX	TD handle and flags:		
	Bits	Name	Description
	0	NO_TRACK	Large GPA range blocking and TLB tracking mode: 0: The merged large GPA range is checked for blocking and TLB tracking, and SEPT pages are removed. 1: The merged large GPA range is not checked for blocking and TLB tracking, and SEPT pages are converted to PT_TR pages. Enumeration: Support of NO_TRACK value of 1 is enumerated by TDX_FEATURES0.NON_BLOCKING_RESIZE (bit 35), readable using TDH.SYS.RD*.
	11:1	Reserved	Reserved: must be 0
	51:12	TDR_HPA	Bits 51:12 of the host physical address of the parent TDR page (HKID bits must be 0)

Operand	Description		
	63:52	Reserved	Reserved: must be 0

5.4.26.2. Output Operands

Table 5.105: TDH.MEM.PAGE.PROMOTE Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	If TDH.MEM.PAGE.PROMOTE succeeded: - If the specified value of NO_TRACK was 0, RCX returns the HPA of the removed L1 SEPT page (HKID bits are set to 0). If supported by the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L1 SEPT page are free. - Else (NO_TRACK was 1), RCX returns the HPA of the L1 SEPT page converted to PT_TR (HKID bits are set to 0). In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESTARTABLE, RCX is unmodified. Else, RCX returns extended error information part 1. In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page; it may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESTARTABLE, RDX is unmodified. Else, RDX returns extended error information part 2. In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
R9	If TDH.MEM.PAGE.PROMOTE version is 1 or higher: - If the specified value of NO_TRACK was 0 and L2 VM #1's L2 SEPT page has been removed, R9 returns the HPA of that L2 SEPT page (HKID bits are set to 0). If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L2 #1 SEPT page are free. - Else, if NO_TRACK was 1 and L2 VM #1's L2 SEPT page has been converted to PT_TR, R9 returns the HPA of that L2 SEPT page (HKID bits are set to 0). - Else, R9 returns NULL_PA (-1). Else (TDH.MEM.PAGE.PROMOTE version is 0), R9 is unmodified.

Operand	Description
R10	If TDH.MEM.PAGE.PROMOTE version is 1 or higher: - If the specified value of NO_TRACK was 0 and L2 VM #2's L2 SEPT page has been removed, R10 returns the HPA of that L2 SEPT page (HKID bits are set to 0). - If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L2 #2 SEPT page are free. - Else, if NO_TRACK was 1 and L2 VM #2's L2 SEPT page has been converted to PT_TR, R10 returns the HPA of that L2 SEPT page (HKID bits are set to 0). - Else, R10 returns NULL_PA (-1). Else (TDH.MEM.PAGE.PROMOTE version is 0), R10 is unmodified.
R11	If TDH.MEM.PAGE.PROMOTE version is 1 or higher: - If the specified value of NO_TRACK was 0 and L2 VM #3's L2 SEPT page has been removed, R11 returns the HPA of that L2 SEPT page (HKID bits are set to 0). - If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L2 #3 SEPT page are free. - Else, if NO_TRACK was 1 and L2 VM #3's L2 SEPT page has been converted to PT_TR, R11 returns the HPA of that L2 SEPT page (HKID bits are set to 0). - Else, R11 returns NULL_PA (-1). Else (TDH.MEM.PAGE.PROMOTE version is 0), R11 is unmodified.
R12	If the TDX Module is configured to use Dynamic PAMT and the merged page level is 1 (2MB), and TDH.MEM.PAGE.PROMOTE succeeded, R12 returns the HPA of the removed PAMT page for 4KB pages 0 through 255 (HKID bits are set to 0). Else, R12 is unmodified.
R13	If the TDX Module is configured to use Dynamic PAMT and the merged page level is 1 (2MB), and TDH.MEM.PAGE.PROMOTE succeeded, R13 returns the HPA of the removed PAMT page for 4KB pages 256 through 511 (HKID bits are set to 0). Else, R13 is unmodified.
Other	Unmodified

5.4.26.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5 5.4.26.3.1. Overview

TDH.MEM.PAGE.PROMOTE merges 512 private pages, which are consecutive both in the HPA space and in the GPA space. The L1 SEPT page and all existing L2 SEPT pages at the requested GPA and level are removed.

All merged private pages must have the same Secure EPT leaf entry attributes and state, which must be either MAPPED or PENDING. All merged private pages must have the same set of L2 mappings and L2 attributes.

10 5.4.26.3.2. Enumeration

Availability of TDH.MEM.PAGE.PROMOTE version 1 is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.MEM.PAGE.PROMOTE with a version number higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

Support of NO_TRACK value of 1 is enumerated by TDX_FEATURES0.NON_BLOCKING_RESIZE (bit 35).

15 Support of dynamic PAMT is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36).

5.4.26.3.3. Blocking and TLB Tracking and the NO_TRACK Input Flag

If NO_TRACK is supported and its value is 1, the promoted GPA range is not checked for blocking and TLB tracking. The SEPT pages mapping that range are not removed; instead, they are converted to PT_TR pages which can later be either tracked and reclaimed or used as new SEPT pages for TDH.MEM.PAGE.DEMOTE for the current TD.

- 5 Else (NO_TRACK is 0), if the TD may be running, the promoted GPA range must be blocked and TLB tracked. Else (e.g., TDH.MR.FINALIZE has not yet been executed, or the TD has been paused for export), no blocking and tracking is required.

5.4.26.3.4. Dynamic PAMT

- 10 If the TDX Module is configured to use Dynamic PAMT and the merged page level is 1 (2MB), the pair of PAMT pages that were associated with the 512 small pages is removed, and the non-leaf PAMT entry that was associated with the whole large HPA range changes to a leaf entry.

If the TDX Module is configured for dynamic PAMT, bit 62 of RCX, R9, R10 and R11 are returned as hints indicating that all entries in the PAMT pages mapping the respective removed SEPT pages are free, and they can be removed using TDH.PHYMEM.PAMT.REMOVE.

- 15 **Note:** If the same PAMT pages map more than one of the removed SEPT pages, bit 62 may indicate so in only one of RCX, R9, R10 and R11.

5.4.26.3.5. Interruptibility

TDH.MEM.PAGE.PROMOTE is interruptible but not resumable. If a pending interrupt is detected during operation, TDH.MEM.PAGE.PROMOTE returns with a TDX_INTERRUPTED_RESTARTABLE status in RAX. No promote operation is done and no output operands except RAX are modified.

- 20 In such cases, TDH.MEM.PAGE.PROMOTE should be invoked in a loop until it terminates successfully. The host VMM should be designed to avoid cases where interrupt storms prevent successful completion of TDH.MEM.PAGE.PROMOTE.

5.4.26.3.6. Removed Page Initialization

On platforms which do not use ACT, after the SEPT pages have been removed, the host VMM should initialize their content before they are reused as non-private pages, as described in the [Base Spec].

25 5.4.26.3.7. SEPT Page HPA Inputs and Outputs

The table below shows the values of the SEPT HPA output arguments in RCX and R9 – R11 when version 1 or higher is selected and no error occurs (RAX returns TDX_SUCCESS).

Table 5.106: Meaning of TDH.MEM.PAGE.PROMOTE's SEPT HPA Arguments on Output (No Error)

Value	RCX on Output	R9 – R11 on Output
NULL_PA (-1)	N/A	No removed or converted SEPT page for this L2 VM
Valid HPA	L1 SEPT page HPA If NO_TRACK value is 0, the page is removed. If supported and Dynamic PAMT is used, bit 62 is a PAMT page pair removal hint. Else (NO_TRACK is supported and its value is 1), the page is not removed; it is converted to PT_TR.	L2 SEPT page HPA If NO_TRACK value is 0, the page is removed. If supported and Dynamic PAMT is used, bit 62 is a PAMT page pair removal hint. Else (NO_TRACK is supported and its value is 1), the page is not removed; it is converted to PT_TR.

30 5.4.26.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.107: TDH.MEM.PAGE.PROMOTE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ²³
Explicit	RCX	GPA and Level	Removed Secure EPT page	SEPT_PAGE	R	Private	2 ^{12+9*Level} Bytes	Exclusive	None	None	Exclusive
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared	None
Implicit	N/A	HPA	Merged HPA range	Blob	None	Private	N/A	Exclusive	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	None
Implicit	N/A	GPA	L1 Secure EPT Tree	N/A	RW	Private	N/A	Exclusive(h)	N/A	N/A	None
Implicit	N/A	GPA	Large page L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A	None
Implicit	N/A	GPA	Small pages L1 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A	None
Implicit	N/A	GPA	L2 Secure EPT Trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	GPA	L2 Large page Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A	None
Implicit	N/A	GPA	L2 Small pages Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A	None
Implicit	N/A	HPA	Removed PAMT pages ²⁴	PAMT_PAGE	RW	Opaque	4KB	Exclusive(i) ²⁵	None	None	Exclusive

5.4.26.5. Completion Status Codes

Table 5.108: TDH.MEM.PAGE.PROMOTE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_INVALID_PROMOTE_CONDITIONS	
TDX_EPT_WALK_FAILED	

²³ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

²⁴ Applicable only if the TDX Module is configured to use dynamic PAMT and the merged page level is 1 (2MB).

²⁵ Concurrency is enforced by locking the parent **leaf** PAMT entry, which maps the new page.

Completion Status Code	Description
TDX_INTERRUPTED_RESTARTABLE	TDH.MEM.PAGE.PROMOTE's operation has been interrupted by an external event; it may be restarted (from its beginning) by calling it again.
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.PAGE.PROMOTE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	

5.4.27. TDH.MEM.PAGE.RELOCATE Leaf

Relocate a 4KB mapped page from its current host physical address to another.

5.4.27.1. Input Operands**Table 5.109: TDH.MEM.PAGE.RELOCATE Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 5
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	The level of the Secure EPT entry that maps the private page to be relocated, must be 0 (i.e., 4KB) (see 3.6.1).
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address of the private page to be relocated
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		
R8	Host physical address of the relocated page target (HKID bits must be 0)		

5.4.27.2. Output Operands**Table 5.110: TDH.MEM.PAGE.RELOCATE Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	If TDH.MEM.PAGE.RELOCATE succeeded: - RCX returns the HPA of the old physical page that has been removed (HKID bits are set to 0). - If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed old physical page are free. In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2

Operand	Description
	In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
Other	Unmodified

5.4.27.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.27.3.1. Overview

TDH.MEM.PAGE.RELOCATE replaces a mapped 4KB page mapping target HPA by moving the current page content to a new target HPA and updating the Secure-EPT mapping to the new target HPA. On successful operation, the previous mapped HPA target is marked is free in the PAMT.

5.4.27.3.2. Blocking and TLB Tracking

If the TD may be running, the relocated page must be blocked and TLB tracked. Else (e.g., TDH.MR.FINALIZE has not yet been executed, or the TD has been paused for export), no blocking and tracking is required.

5.4.27.3.3. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation. In addition, RCX[62] is returned as a hint indicating that all entries in the PAMT page pair mapping the removed old physical page are free, and they can be removed using TDH.PHYMEM.PAMT.REMOVE.

5.4.27.3.4. Removed Page Initialization

On platforms which do not use ACT, after the page has been relocated, the host VMM should initialize its content before it is reused as a non-private page, as described in the [Base Spec].

5.4.27.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.111: TDH.MEM.PAGE.RELOCATE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ²⁶
Explicit	RCX	GPA and Level	TD private page	Blob	R	Private	4KB	Exclusive	None	None	Exclusive
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared	None
Explicit	R8	HPA	Target physical page	Blob	RW	Private	4KB	Exclusive	Shared	Shared	Exclusive
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	None

²⁶ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ²⁶
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A	None
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A	None
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A	None

5.4.27.5. Completion Status Codes

Table 5.112: TDH.MEM.PAGE.RELOCATE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_WALK_FAILED	
TDX_GPA_RANGE_NOT_BLOCKED	
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.PAGE.RELOCATE is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	

5.4.28. TDH.MEM.PAGE.REMOVE Leaf

Remove a GPA-mapped 4KB, 2MB or 1GB private page from a TD.

5.4.28.1. Input Operands**Table 5.113: TDH.MEM.PAGE.REMOVE Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 29
	23:16	Version Number	Selects the SEAMCALL interface function version If the TDX Module supports ACT, version may be 0 or 1. Else, version must be 0. See enumeration details below.
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the Secure EPT entry that maps the private page to be removed: either 0 (4KB), 1 (2MB) or 2 (1GB) – see 3.6.1.
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address of the private page to be removed
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		

5.4.28.2. Output Operands**Table 5.114: TDH.MEM.PAGE.REMOVE Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	If TDH.MEM.PAGE.REMOVE succeeded: - RCX returns the HPA of the removed page (HKID bits are set to 0). - If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed page are free. This only applies to 4KB pages. In case of EPT walk error, RCX returns the Secure EPT entry architectural content where the error was detected – see 3.6.2. The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, RDX returns the Secure EPT entry level and state where the error was detected – see 3.6.2

Operand	Description
	In other cases, RDX returns 0.
Other	Unmodified

5.4.28.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.28.3.1. Overview

TDH.MEM.PAGE.REMOVE removes a 4KB, 2MB or 1GB private page from the TD's Secure EPT tree (marks the SEPT entry as FREE). If the page is mapped in any L2 Secure EPT, the applicable L2 SEPT entries are marked as L2_FREE. On successful operation, TDH.MEM.PAGE.REMOVE marks the physical page as free in PAMT.

5.4.28.3.2. Enumeration

Availability of TDH.MEM.PAGE.REMOVE version 1 is enumerated by TDX_FEATURES0.ACT (bit 14), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.MEM.PAGE.REMOVE with version higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

5.4.28.3.3. Blocking and TLB Tracking

If the TD may be running, the removed page must be blocked and TLB tracked. Else (e.g., TDH.MR.FINALIZE has not yet been executed, or the TD has been paused for export), no blocking and tracking is required.

5.4.28.3.4. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT and the removed page size is 4KB, RCX[62] is returned as a hint indicating that all entries in the PAMT page pair mapping the removed page are free, and they can be removed using TDH.PHYMEM.PAMT.REMOVE.

5.4.28.3.5. Removed Page Initialization

On platforms which do not use ACT, after the page has been removed, the host VMM should initialize its content before it is reused as non-private pages, as described in the [Base Spec].

5.4.28.3.6. Interruptibility

If called with version higher than 0, TDH.MEM.PAGE.REMOVE is interruptible and resumable. If a pending interrupt is detected during operation, TDH.MEM.PAGE.REMOVE returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. No output operands except RAX are modified.

5.4.28.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.115: TDH.MEM.PAGE.REMOVE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ²⁷
Explicit	RCX	GPA and Level	TD private page	Blob	R	Private	2 ^{12+9*Level} Bytes	Exclusive	None	None	Exclusive

²⁷ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ²⁷
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	None
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A	None
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A	None
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A	None

5.4.28.5. Completion Status Codes

Table 5.116: TDH.PHYMEM.PAGE.REMOVE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_WALK_FAILED	
TDX_GPA_RANGE_NOT_BLOCKED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.PAGE.REMOVE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	

5.4.29. TDH.MEM.RANGE.BLOCK Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Block a TD private GPA range (i.e., a Secure EPT page or a TD private page) at any level (4KB, 2MB, 1GB, 512GB, 256TB, etc.) from creating new GPA-to-HPA address translations.

5.4.29.1. Input Operands**Table 5.117: TDH.MEM.RANGE.BLOCK Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 7
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the Secure EPT entry that maps the GPA range to be blocked – see 3.6.1 Level must be between 0 and 3 for a 4-level EPT or between 0 and 4 for a 5-level EPT.
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the GPA range to be blocked Depending on the level, the following least significant bits must be 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12 Level 3 (EPML4E): Bits 38:12 Level 4 (EPML5E): Bits 47:12
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		

5.4.29.2. Output Operands**Table 5.118: TDH.MEM.RANGE.BLOCK Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1

Operand	Description
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
Other	Unmodified

5.4.29.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.29.3.1. Overview

TDH.MEM.RANGE.BLOCK finds the Secure EPT entry for the given GPA and level, and it marks it as blocked (BLOCKED or PENDING_BLOCKED as appropriate). It records the current TD's TLB epoch in the PAMT entry of the physical Secure EPT page or TD private page mapped by the blocked Secure EPT entry.

5.4.29.3.2. Interaction with TD Migration

If the TDX module is configured for write-blocking based export, TDH.MEM.RANGE.BLOCK cannot be used to block a page that has been exported. To block an exported page, the host VMM must first cancel the page export by calling TDH.EXPORT.MEM with a CANCEL operation for that page.

Else (the TDX module is configured for non-blocking export), TDH.MEM.RANGE.BLOCK cannot block any memory while an export session is in the blackout phase, i.e., after TDH.EXPORT.PAUSE is called and before either TDH.EXPORT.TRACK(DONE) or TDH.EXPORT.ABORT is called.

5.4.29.3.3. Interaction with TDX Connect

If the TD is configured with TDX Connect enabled, the following conditions apply:

- If the GPA range is mapped by a leaf SEPT entry, TDH.MEM.RANGE.BLOCK of MAPPED pages is only allowed if no TDIs are attached. TDH.MEM.RANGE.BLOCK of PENDING pages is allowed unconditionally.
- Else (the GPA range is mapped by a non-leaf SEPT entry), TDH.MEM.RANGE.BLOCK is only allowed if either no TDIs are attached, or if all 512 entries of the SEPT child page are FREE.

5.4.29.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.119: TDH.MEM.RANGE.BLOCK Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA and Level	Secure EPT page or TD private page	Blob	None	Private	$2^{12+9*\text{Level}}$ Bytes	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Exclusive	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.29.5. Completion Status Codes

Table 5.120: TDH.MEM.RANGE.BLOCK Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_BLOCKING_DISALLOWED	
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.RANGE.BLOCK is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.30. TDH.MEM.RANGE.UNBLOCK Leaf

Remove the blocking of a TD private GPA range (i.e., a Secure EPT page or a TD private page), at any level (4KB, 2MB, 1GB, 512GB, 256TB etc.) previously blocked by TDH.MEM.RANGE.BLOCK.

5.4.30.1. Input Operands**Table 5.121: TDH.MEM.RANGE.UNBLOCK Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 39
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the Secure EPT entry that maps the GPA range to be unblocked – see 3.6.1 Level must be between 0 and 3 for a 4-level EPT or between 0 and 4 for a 5-level EPT.
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address range to be unblocked Depending on the level, the following least significant bits must be 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12 Level 3 (EPML4E): Bits 38:12 Level 4 (EPML5E): Bits 47:12
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		

5.4.30.2. Output Operands**Table 5.122: TDH.MEM.RANGE.UNBLOCK Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1

Operand	Description
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
Other	Unmodified

5.4.30.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5 5.4.30.3.1. Overview

TDH.MEM.RANGE.UNBLOCK finds the blocked Secure EPT entry for the given GPA and level. It checks that the entry has been blocked and TLB tracking has been done, and then it marks the entry as non-blocked (MAPPED or PENDING as appropriate).

5.4.30.3.2. Blocking and TLB Tracking

- 10 If the TD may be running, the unblocked GPA range must be blocked and TLB tracked. Else (e.g., TDH.MR.FINALIZE has not yet been executed, or the TD has been paused for export), no blocking and tracking is required.

5.4.30.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

15 **Table 5.123: TDH.MEM.RANGE.UNBLOCK Operands Information Definition**

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA and Level	Secure EPT page or TD private page	Blob	None	Private	$2^{12+9*\text{Level}}$ Bytes	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Exclusive	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	GPA	L2 Secure EPT tree	N/A	RW	Private	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.30.5. Completion Status Codes

Table 5.124: TDH.MEM.RANGE.UNBLOCK Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_WALK_FAILED	
TDX_GPA_RANGE_NOT_BLOCKED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.RANGE.UNBLOCK is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	

5.4.31. TDH.MEM.RD Leaf

Read a 64b chunk from a debuggable guest TD private memory.

5.4.31.1. Input Operands**Table 5.125: TDH.MEM.RD Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 12
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The guest physical address of a naturally aligned 8-byte chunk of a guest TD private page		
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		

5.4.31.2. Output Operands**Table 5.126: TDH.MEM.RD Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
R8	Content of the memory chunk In case of an error, as indicated by RAX, R8 returns 0
Other	Unmodified

5.4.31.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MEM.RD reads a 64b chunk from a debuggable guest TD private memory.

5.4.31.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.127: TDH.MEM.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA	TD private memory	Blob	R	Private	8B	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	Secure EPT tree	N/A	R	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	Secure EPT entry	SEPT Entry	R	Private	N/A	Exclusive	N/A	N/A

5

5.4.31.5. Completion Status Codes

Table 5.128: TDH.MEM.RD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_NOT_PRESENT	
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TD_NON_DEBUG	
TDX_TDCS_NOT_ALLOCATED	

5.4.32. TDH.MEM.SCAN.COMP/RANGE – Common

Unreleased Feature: TDH.MEM.SCAN.* is a set of interface functions that will be provided with Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

This section contains definitions that are common to TDH.MEM.SCAN.COMP and TDH.MEM.SCAN.RANGE.

5.4.32.1. GPA List-of-Lists Processing

5.4.32.1.1. Overview

GPA list-of-lists is defined in 3.13.2. It enables the host VMM to specify up to 262144 (i.e., 512²) GPA list entries into which the scan results are written. The figure below shows how it is used by TDH.MEM.SCAN.COMP and TDH.MEM.SCAN.RANGE.

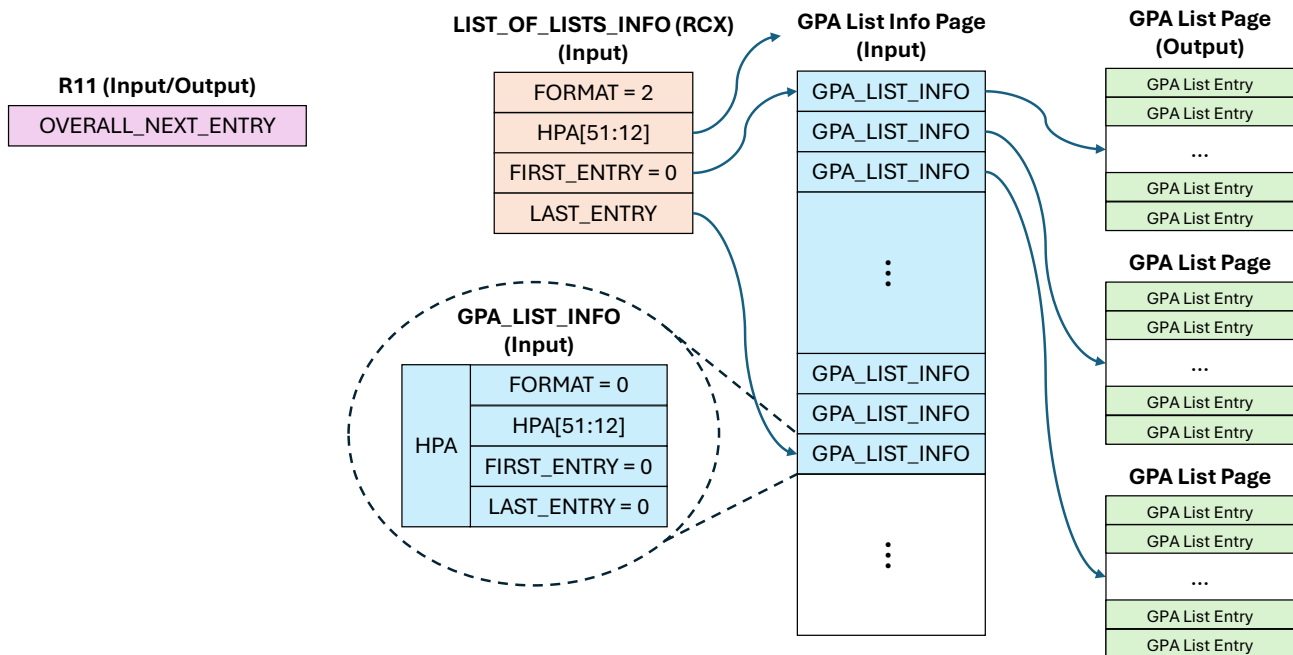


Figure 5.3: GPA List of Lists as Used by TDH.MEM.SCAN.COMP/RANGE

The host VMM can allocate up to 512 4KB GPA List pages, referenced by a single 4KB GPA List Info Page. Each GPA List page contains 512 entries.

5.4.32.1.2. LIST_OF_LISTS_INFO (Input)

The host VMM sets the LIST_OF_LISTS_INFO input (in RCX) as follows:

- HPA contains bits 51:12 of the GPA List Info page shared HPA (including HKID).
- FIRST_ENTRY must be 0.
- LAST_ENTRY contains the index of the last valid entry in the GPA List Info page.
- FORMAT must be LIST_OF_LISTS (2).

LIST_OF_LISTS_INFO is not modified by TDH.MEM.SCAN.COMP/RANGE.

5.4.32.1.3. GPA_LIST_INFO Entries (Input)

The host VMM sets each GPA_LIST_INFO entry with the 4KB-aligned shared HPA (including HKID) of a GPA List Page.

Note: This is compliant with the generic GPA_LIST_INFO format defined in 3.13.2.2:

- The HPA field contains bits 51:12 of the page HPA.
- FORMAT, FIRST_ENTRY and LAST_ENTRY must be 0.

GPA_LIST_INFO entries are not modified by TDH.MEM.SCAN.COMP/RANGE.

5.4.32.1.4. GPA List Pages (Output)

TDH.MEM.SCAN.COMP/RANGE writes entries in the GPA list pages, starting with the next available entry.

5.4.32.1.5. OVERALL_NEXT_ENTRY (Input/Output)

OVERALL_NEXT_ENTRY, provided as an input in R11, specifies the next overall (between 0 and 262143) index of the GPA List entry to be written by TDH.MEM.SCAN.COMP/RANGE. On output, R11 is updated by TDH.MEM.SCAN.COMP/RANGE to the index of the next available entry. Thus, the output value can be used as-is as the input for the next call to TDH.MEM.SCAN.COMP/RANGE, to continue filling the GPA list-of-lists. See below for details.

Given OVERALL_NEXT_ENTRY, the following can be calculated:

- The next available GPA_LIST_INFO entry index in the GPA List Info page, which is also the index of the GPA List Page that is being filled, can be calculated as $\text{OVERALL\_NEXT\_ENTRY} / 512$.
- All previous GPA List Pages are already filled with 512 GPA List Entries.
- In the GPA List Page that being filled, the next available GPA List Entry index can be calculated as $\text{OVERALL\_NEXT\_ENTRY} \% 512$.

On input, OVERALL_NEXT_ENTRY's value must be between 0 and $512 * (\text{LIST\_OF\_LISTS\_INFO.LAST\_ENTRY} + 1) - 1$.

Note: On a list full condition (status is TDX_INTERRUPTED_LIST_FULL), OVERALL_NEXT_ENTRY returns with a value that is higher than the last available entry.

5.4.32.1.6. Providing an Empty GPA List-of-Lists

To start with a new, empty GPA list-of-lists, the host VMM sets OVERALL_NEXT_ENTRY to 0.

This typically needs to be done after a previous GPA list-of-lists was completely filled, i.e., the previous call to TDH.MEM.SCAN.COMP/RANGE returned with and TDX_INTERRUPTED_LIST_FULL status (see below).

5.4.32.1.7. Continuing a Partially Filled GPA List-of-Lists

TDH.MEM.SCAN.COMP/RANGE may be called to continue writing to a partially filled GPA list-of-lists, with the input LIST_OF_LISTS_INFO and OVERALL_NEXT_ENTRY values as returned by the previous call to TDH.MEM.SCAN.COMP/RANGE.

Specifically, this can be done when resuming TDH.MEM.SCAN.COMP/RANGE after an interruption, i.e., the returned status was TDX_INTERRUPTED_RESUMABLE or TDX_INTERRUPTED_BUSY.

5.4.32.1.8. List Full Interruption and Resumption

A list full condition happens when all the available GPA List entries have been written by TDH.MEM.SCAN.COMP/RANGE, and there is a need to write another entry. In this case, TDH.MEM.SCAN.COMP/RANGE returns with a TDX_INTERRUPTED_LIST_FULL status. The host VMM is expected to provide a GPA list-of-lists with available entries and resume TDH.MEM.SCAN.COMP/RANGE (with the RESUME flag set to 1).

5.4.33. TDH.MEM.SCAN.COMP Leaf

Unreleased Feature: TDH.MEM.SCAN.* is a set of interface functions that will be provided with Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Do a comprehensive scan of the TD's private GPA space and perform the requested operation.

5.4.33.1. Input Operands

Table 5.129: TDH.MEM.SCAN.COMP Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 93
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	LIST_OF_LISTS_INFO	Information for GPA list-of-lists in shared memory. For details, see the description below, in 5.4.32.1 and in 3.13.2. • FORMAT must be LIST_OF_LISTS (2). • FIRST_ENTRY must be 0. • LAST_ENTRY contains the index of the last valid entry in the GPA List Info page, i.e., the provided number of GPA List Info pages - 1.		
RDX	TDR	HPA of the source TD's TDR page (HKID bits must be 0)		
R8	CONTROLS	Controls fields:		
		Bits	Field	Description
		7:0	OPERATION	Identifies the requested operation – see the table below Enumeration: See below for details.
		15:8	QUALIFIER	Additional qualification of the requested operation
		31:16	RESERVED	Reserved, must be 0
		47:32	CONTEXT_ID	Identifies the context of this invocation CONTEXT_ID must be between 0 and NUM_MEM_SCAN_CONTEXTS - 1. See enumeration details below. Each concurrent invocation of TDH.MEM.SCAN.COMP must be provided with a unique CONTEXT_ID.
		55:48	RANGE_ID	Identifies the GPA range (previously configured by TDH.SCAN.CONFIG) for this invocation RANGE_ID must be between 0 and NUM_RANGES - 1 (NUM_RANGES is configured by TDH.SCAN.CONFIG).

Operand	Name	Description
		62:56 RESERVED Reserved, must be 0
		63 RESUME 0: This is a new invocation of TDH.MEM.SCAN.COMP 1: This is resumption of a previously interrupted TDH.MEM.SCAN.COMP operation
R11	OVERALL_NEXT_ENTRY	The next overall index of the GPA List entry to be written by TDH.MEM.SCAN.COMP. For details, see the description below and in 5.4.32.1. Must be between 0 and $512 * (\text{LIST\_OF\_LISTS\_INFO.LAST\_ENTRY} + 1) - 1$.

5.4.33.2. Output Operands

Table 5.130: TDH.MEM.SCAN.COMP Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
R11	OVERALL_NEXT_ENTRY	The overall index of the next available GPA List entry. For details, see the description below and in 5.4.32.1.
Other		Unmodified

5 5.4.33.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.33.3.1. Overview

10 TDH.MEM.SCAN.COMP scans the whole TD's GPA range and performs the requested operation. Most operations fill page information in the returned GPA lists.

5.4.33.3.2. Enumeration

TDH.MEM.SCAN.COMP is supported if any of its operations are enumerated as available. See the operation modes table below for details. If not supported, calling TDH.MEM.SCAN.COMP returns a TDX_OPERAND_INVALID(RAX) status.

The supported number of memory scan contexts is enumerated by NUM_MEM_SCAN_CONTEXTS.

15 5.4.33.3.3. Operation Modes and Qualifiers

TDH.MEM.SCAN.COMP may support multiple operation modes as detailed below. Operation modes may have qualifiers.

Table 5.131: TDH.MEM.SCAN.COMP Operation Modes

OPERATION Value	Name	Description
1	DCHECK	Do a comprehensive scan of the TD's GPA range for a final list of export candidates. DCHECK is used in the final round of export, after the TD has been paused and as a prerequisite to exporting the up-to-date memory image before calling TDH.EXPORT.TRACK(DONE). DCHECK is only available if the TDX module is configured for non-blocking export. An export session must be in progress, and the TD must have been paused by TDH.EXPORT.PAUSE.

OPERATION Value	Name	Description
		Enumeration: DCHECK support is enumerated by TDX_FEATURES0.NON_BLOCKING_EXPORT (bit 41), readable by TDH.SYS.RD* (see 3.3.3.1). DCHECK has two sub modes, selected by the QUALIFIER input: 0: EXPORT: Scan and return a GPA list of memory pages that either have not been exported or need to be re-exported. 1: REEXPORT: Scan and return a GPA list of memory pages that need to be re-exported. Pages that have not been exported are still counted by UNEXPORT_COUNT. This mode is useful for implementing post-copy (if supported). Other: Reserved
Other	RESERVED	Reserved

5.4.33.3.4. Comprehensive Scan Details

The whole private GPA space is scanned by multiple, possibly concurrent, invocations of TDH.MEM.SCAN.COMP. While a comprehensive scan is in progress, no changes are allowed to the TD's GPA space structure.

5.4.33.3.4.1. Multiple GPA Ranges

To allow optimization for NUMA configurations, multiple GPA ranges may be configured by the host VMM using TDH.MEM.SCAN.CONFIG.

The RANGE_ID input parameter identifies the GPA range for the current invocation. RANGE_ID must be between 0 and NUM_RANGES - 1 (NUM_RANGES is configured by TDH.SCAN.CONFIG). The host VMM can invoke concurrent scanning TDH.MEM.SCAN.COMP threads of each GPA range, typically executed on LPs that are close (in the NUMA sense) to the memory range being scanned.

5.4.33.3.4.2. Scan Concurrency within a GPA Range

Within each GPA range, the host VMM can invoke multiple concurrent scanning TDH.MEM.SCAN.COMP threads. The threads balance the work among themselves.

- When invoked, TDH.MEM.SCAN.COMP allocates a sub-range to scan. The sub-range size is configured by the host VMM using TDH.MEM.SCAN.CONFIG.
- When done with that sub-range, if there is still unscanned memory in the range, TDH.MEM.SCAN.COMP allocates a new sub-range to scan and loops to step 1 above.
- If there is no more memory to scan, TDH.MEM.SCAN.COMP returns to the host VMM. If there are no more concurrent scans running in the current range, it indicates a successful scan of the range.

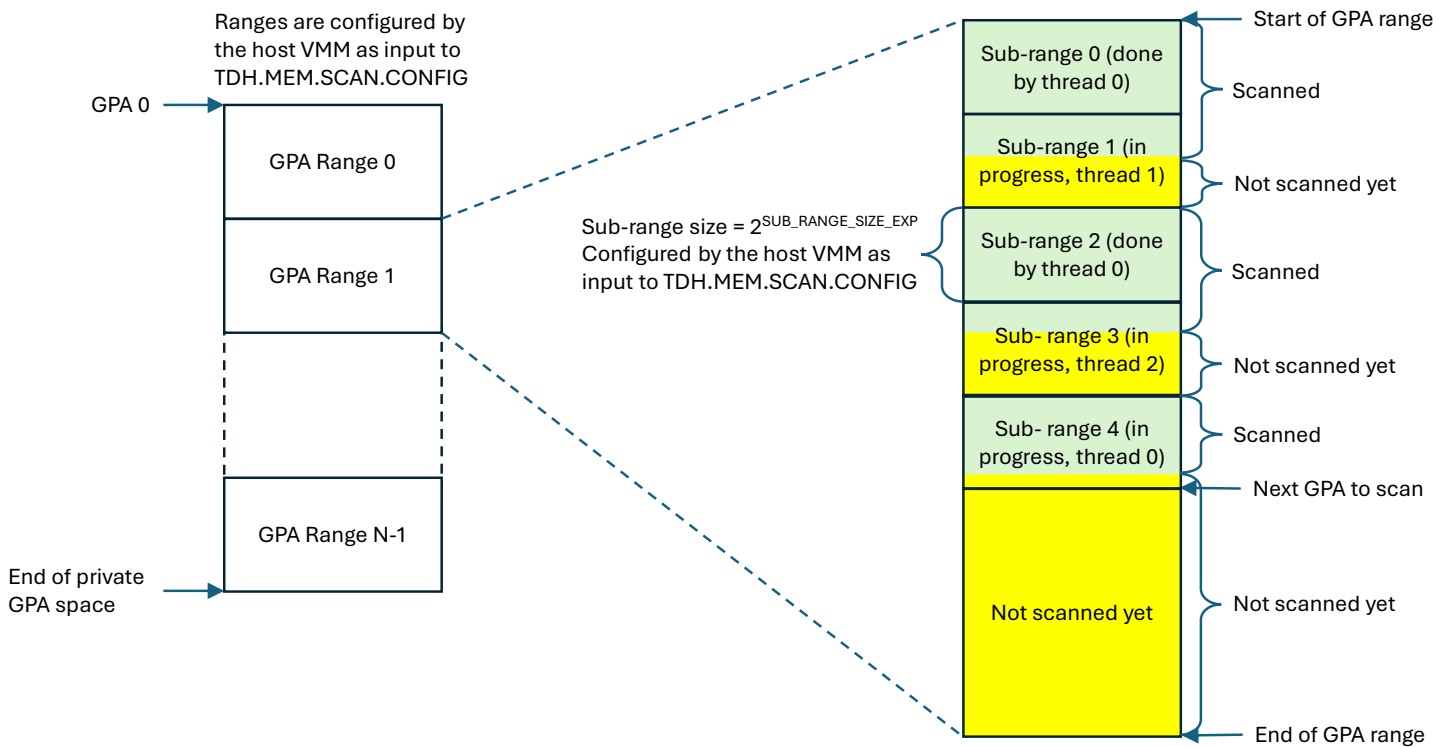


Figure 5.4: Concurrent Scan within a GPA Range

Notes:

- Each concurrent TDH.MEM.SCAN.COMP invocation must be provided with a unique CONTEXT_ID.
- The sub-range size and number of concurrent threads per range can be tuned for best performance, possibly taking into account the guest TD's memory allocation distributing within the GPA range.

5.4.33.3.4.3. Comprehensive Scan Start

A new comprehensive scan starts when the host VMM calls TDH.MEM.SCAN.COMP to perform a comprehensive scan, and either of the following conditions is true:

- This is the first invocation of TDH.MEM.SCAN.COMP since the TD was created or imported, or
- This is the first invocation of TDH.MEM.SCAN.COMP since TDH.MEM.SCAN.RESET was called.

5.4.33.3.4.4. Comprehensive Scan Context

To support multiple concurrent comprehensive scan threads, the TDX module holds multiple instances of scan contexts per TD, allocated by TDH.MEM.SCAN.CONFIG. The CONTEXT_ID parameter is used as a handle for the internally held context, to allow resumption after an incomplete operation or an interruption. It must be between 0 and NUM_MEM_SCAN_CONTEXTS - 1. See enumeration details above.

5.4.33.3.4.5. Comprehensive Scan Success

If TDH.MEM.SCAN.COMP executes successfully, the return status in RAX indicates the following:

TDX_SUCCESS	The current invocation of TDH.MEM.SCAN.COMP completed successfully, but there are concurrent instances of TDH.MEM.SCAN.COMP still scanning the current GPA range.
TDX_MEM_RANGE_SCAN_SUCCESS	Comprehensive scan of the current GPA range completed successfully, but there are concurrent instances of TDH.MEM.SCAN.COMP threads still scanning other GPA ranges. This status is returned at most once per GPA range.
TDX_MEM_SCAN_SUCCESS	Comprehensive scan of the entire GPA space completed successfully. This status is returned at most once per comprehensive scan.

5.4.33.3.4.6. Comprehensive Scan Failure

There might be cases where a TDH.MEM.SCAN.COMP instance fails in a way that fails the whole comprehensive scan. For example, this happens when a blocked SEPT entry that is discovered by TDH.MEM.SCAN.COMP(DCHECK). In such

cases, TDH.MEM.SCAN.COMP returns a TDX_MEM_SCAN_FAILED_BLOCKED_RANGE status. Concurrently executing TDH.MEM.SCAN.COMP instances consequently also fail, returning a TDH_MEM_SCAN_FAILED(OTHER_THREAD_FAILED) status.

After a comprehensive scan failed, the host VMM may start a new comprehensive scan. To do that, it first needs to call TDH.COMP.SCAN.RESET to reset the internal comprehensive scan state.

5.4.33.3.4.7. Backward Compatibility

TDH.MEM.SCAN.COMP supports scanning the memory of a TD that was created by an older TDX module that didn't support TDH.MEM.SCAN.COMP, and the TDX module was later updated using a TD-preserving update. This scan may be somewhat less efficient since some information collected during the TD lifetime may not exist.

5.4.33.3.5. Concurrency

TDH.MEM.SCAN.COMP may be called concurrently on multiple LPs and may run concurrently with other functions (e.g., TDH.EXPORT.MEM). This is especially important for the DCHECK operation, which is done during the export blackout time and thus should be completed as fast as possible.

5.4.33.3.5.1. Memory Page Concurrency

For the DCHECK operation, concurrently changing page state in a way that impacts export correctness is prevented by the architectural restrictions on the allowed memory management operations.

5.4.33.3.5.2. SEPT Tree Concurrency

TDH.MEM.SCAN.COMP acquires a shared lock on the SEPT trees, to prevent blocking or changes to the tree structure (e.g., by TDH.MEM.RANGE.BLOCK or TDH.MEM.SEPT.REMOVE) while TDH.MEM.SCAN.COMP is running. However, this lock does not prevent SEPT tree structure modification when TDH.MEM.SCAN is not executing (e.g., it was interrupted).

For the DCHECK operation, the non-blocking export architecture prevents SEPT tree structure change while the comprehensive scan is in progress, even if no instance of TDH.MEM.SCAN.COMP is running, by not allowing the applicable memory management functions to run.

5.4.33.3.5.3. SEPT Entry Concurrency

If TDH.MEM.SCAN.COMP fails to acquire a lock on an SEPT entry, it returns with a TDX_INTERRUPTED_BUSY status in RAX. The host VMM is expected to resume TDH.MEM.SCAN.COMP; see the discussion on interruptibility below.

5.4.33.3.6. GPA List-of-Lists Processing

Processing of the GPA list-of-list by TDH.MEM.SCAN.COMP and by TDH.MEM.SCAN.RANGE is similar; thus, it is described in 5.4.32.1.

5.4.33.3.7. Interruption and Resumption

TDH.MEM.SCAN.COMP is interruptible and resumable. An interruption occurs in the following cases:

- If a pending interrupt is detected during operation, TDH.MEM.SCAN.COMP returns with a TDX_INTERRUPTED_RESUMABLE status in RAX.
- If TDH.MEM.SCAN.COMP fails to acquire a lock on an SEPT entry, it returns with a TDX_INTERRUPTED_BUSY Status in RAX.
- If TDH.MEM.SCAN.COMP detects that a concurrent function (such as TDH.EXPORT.ABORT) has failed to acquire an exclusive lock on the comprehensive memory scan state, it yields and returns with a TDX_INTERRUPTED_BUSY status in RAX.
- A GPA list-of-lists full condition has been detected. In this case, TDH.MEM.SCAN.COMP returns with a TDX_INTERRUPTED_LIST_FULL status.

In all cases, OVERALL_NEXT_ENTRY (in R11) is updated with the overall index of the next list entry to process. Except for the GPA list-of-lists full case, the host VMM may re-invoke TDH.MEM.SCAN.COMP soon after handling the interrupt. To resume after a GPA list-of-lists full case, the host VMM must provide a GPA list-of-lists with available entries. See 5.4.32.1 for details.

If an interrupted TDH.MEM.SCAN.COMP is resumed after an error was detected by a TDH.MEM.SCAN.COMP running in another context, it immediately returns with a TDX_MEM_SCAN_FAILED_OTHER_THREAD status.

5.4.33.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.132: TDH.MEM.SCAN.COMP Memory Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	GPA list info page	HPA	R	Shared	4KB	None	None	None
Explicit	N/A	N/A	GPA list pages (via GPA list info page)	HPA	RW	Shared	4KB	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	R8	Unsigned Integer	Comprehensive scan context	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	Comprehensive scan state	N/A	RW	Opaque	N/A	Shared	N/A	N/A

5

5.4.33.5. Completion Status Codes

Table 5.133: TDH.MEM.SCAN.COMP Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_BLOCKED_PAGES_EXIST	There are memory pages that have been blocked by TDH.MEM.RANGE.BLOCK. This is not permitted if the TDX module is configured for non-blocking export.
TDX_MEM_RANGE_SCAN_SUCCESS	Comprehensive scan of the current GPA range (but not the whole TD private GPA address space) completed successfully.
TDX_MEM_SCAN_ALREADY_SUCCESSFUL	The comprehensive GPA space scan is already successful. The state needs to be reset after a previous scan, by calling TDH.COMP.SCAN.RESET. This status may be returned, in rare cases, because of concurrent TDH.MEM.SCAN.COMP invocation, if another thread has already completed the scan.

Completion Status Code	Description
TDX_MEM_SCAN_CONFIG_REQUIRED	Comprehensive GPA space scan has not been configured by TDH.COMP.SCAN.CONFIG.
TDX_MEM_SCAN_FAILED_BLOCKED_RANGE	The comprehensive GPA space scan failed because a blocked memory range was detected.
TDX_MEM_SCAN_FAILED_OTHER_THREAD	A comprehensive GPA space scan failure was detected by TDH.MEM.SCAN running on another thread.
TDX_MEM_SCAN_SUCCESS	Comprehensive scan of the whole TD private GPA address space completed successfully.
TDX_INTERRUPTED_BUSY	
TDX_INTERRUPTED_LIST_FULL	The output GPA lists are full.
TDX_INTERRUPTED_RESUMABLE	
TDX_INVALID_RESUMPTION	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	Operation is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCS_PAGES_REQUIRED	

5.4.34. TDH.MEM.SCAN.CONFIG Leaf

Unreleased Feature: TDH.MEM.SCAN.* is a set of interface functions that will be provided with Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Configure memory scan and add control structure pages.

5.4.34.1. Input Operands

Table 5.134: TDH.MEM.SCAN.CONFIG Input Operands Definition

Operand		Description		
RAX	LEAF_AND_VERSION	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 94
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	RANGE_LIST_INFO	The shared physical address (including HKID) of a of a page where memory scan control page will be created		
		Bits	Field	Description
		8:0	NUM_RANGES	Number of GPA ranges Must be between 1 and MAX_MEM_SCAN_RANGES, readable by TDH.SYS.RD*.
		11:9	RESERVED	Must be 0
		51:12	RANGE_LIST_HPA	Shared HPA (Incl. HKID) of a range list page
		63:52	RESERVED	Must be 0
RDX	TD_HANDLE	The physical address of the owner TDR page (HKID bits must be 0)		
R8	CX0_HPA	The physical address where memory scan control page 0 will be created If memory scan control page 0 has already been allocated on this platform by a previous call to TDH.MEM.SCAN.CONFIG, R8 may contain NULL_PA (-1). Else, R8 must contain a valid HPA (HKID bits must be 0).		
R9	CX1_HPA	The physical address where memory scan control page 1 will be created If the value of MEM_SCAN_CONTROL_PAGES, readable by TDH.SYS.RD*, is ≤ 1 , R9 is ignored. Else, if memory scan control page 1 has already been allocated on this platform by a previous call to TDH.MEM.SCAN.CONFIG, R9 may contain NULL_PA (-1). Else, R9 must contain a valid HPA (HKID bits must be 0).		
R10	CX2_HPA	The physical address where memory scan control page 2 will be created If the value of MEM_SCAN_CONTROL_PAGES, readable by TDH.SYS.RD*, is ≤ 2 , R10 is ignored.		

Operand		Description
		Else, if memory scan control page 1 has already been allocated on this platform by a previous call to TDH.MEM.SCAN.CONFIG, R10 may contain NULL_PA (-1). Else, R10 must contain a valid HPA (HKID bits must be 0).
R11	CX3_HPA	The physical address where memory scan control page 1 will be created If the value of MEM_SCAN_CONTROL_PAGES, readable by TDH.SYS.RD*, is ≤ 3 , R11 is ignored. Else, if memory scan control page 3 has already been allocated on this platform by a previous call to TDH.MEM.SCAN.CONFIG, R11 may contain NULL_PA (-1). Else, R11 must contain a valid HPA (HKID bits must be 0).

5.4.34.2. Output Operands

Table 5.135: TDH.MEM.SCAN.CONFIG Output Operands Definition

Operand	Name	Description
RAX	Status	SEAMCALL instruction return code – see 5.4.1
R8	CX0_HPA	If TDH.MEM.SCAN.CONFIG terminated successfully, MEM_SCAN_CONTROL_PAGES is ≥ 1 and the page whose HPA was provided in R8 was not used as a memory scan control page (e.g., it has been allocated by a previous call to TDH.MEM.SCAN.CONFIG), R8 is updated with bit 63 set to 1. Else, R8 is unmodified.
R9	CX1_HPA	If TDH.MEM.SCAN.CONFIG terminated successfully, MEM_SCAN_CONTROL_PAGES is ≥ 2 and the page whose HPA was provided in R9 was not used as a memory scan control page (e.g., it has been allocated by a previous call to TDH.MEM.SCAN.CONFIG), R9 is updated with bit 63 set to 1. Else, R9 is unmodified.
R10	CX2_HPA	If TDH.MEM.SCAN.CONFIG terminated successfully, MEM_SCAN_CONTROL_PAGES is ≥ 3 and the page whose HPA was provided in R10 was not used as a memory scan control page (e.g., it has been allocated by a previous call to TDH.MEM.SCAN.CONFIG), R10 is updated with bit 63 set to 1. Else, R10 is unmodified.
R11	CX3_HPA	If TDH.MEM.SCAN.CONFIG terminated successfully, MEM_SCAN_CONTROL_PAGES is ≥ 4 and the page whose HPA was provided in R11 was not used as a memory scan control page (e.g., it has been allocated by a previous call to TDH.MEM.SCAN.CONFIG), R11 is updated with bit 63 set to 1. Else, R11 is unmodified.
Other		Unmodified

5.4.34.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MEM.SCAN.CONFIG is called by the host VMM to configure the comprehensive memory scan, to be done by TDH.MEM.SCAN.COMP. It adds physical pages where scan control information used by TDH.MEM.SCAN.COMP will reside.

The scan configuration is not migrated. If a TD is migrated and then needs to be migrated again, TDH.MEM.SCAN.CONFIG must be called again. It can be invoked at any time after the TDCS pages have been allocated.

TDH.MEM.SCAN.CONFIG may be called to update a previous configuration. No instance of TDH.MEM.SCAN.COMP may be running when TDH.MEM.SCAN.CONFIG is invoked. TDH.MEM.SCAN.CONFIG resets the internal state held by the TDX module for comprehensive memory scans of the specified TD's GPA address space, similar to TDH.MEM.SCAN.RESET.

5.4.34.3.1. Enumeration

TDH.MEM.SCAN.CONFIG is supported if TDH.MEM.SCAN is supported. If not supported, calling TDH.MEM.SCAN.CONFIG returns a TDX_OPERAND_INVALID(RAX) status.

The required number of memory scan control pages is enumerated by NUM_MEM_SCAN_CONTROL_PAGES, readable by TDH.SYS.RD*.

The maximum number of GPA ranges is enumerated by MAX_MEM_SCAN_RANGES.

5.4.34.3.2. Range List Page

The range list page holds a list of GPA ranges, to be used by TDH.MEM.SCAN. The list is formatted as an array of 64-bit entries, with entry N specifying the start of a GPA range N. The number of valid entries is specified by RCX.NUM_RANGES. See the description of TDH.MEM.SCAN.COMP in 5.4.33.3.4 for details.

Table 5.136: Range List Entry

Bits	Name	Description
20:0	RESERVED	Must be 0
50:21	RANGE_START	Bits 50:21 of the range start GPA RANGE_START must be a valid private GPA, lower than the maximum valid private GPA allowed for the TD – see the [TDX Module Base Spec] section on GPA Space Size Configuration and Virtualization. RANGE_START must be aligned on SUB_RANGE_SIZE, i.e., all bits lower than SUB_RANGE_SIZE_EXP must be 0. RANGE_START of entry 0 must be 0.
51	RESERVED	Must be 0
57:52	SUB_RANGE_SIZE_EXP	Specifies the sub-range size to be used by TDH.MEM.SCAN.COMP within the current range: $\text{SUB\_RANGE\_SIZE} = 2^{\text{SUB\_RANGE\_SIZE\_EXP}}$ SUB_RANGE_SIZE_EXP must be at between 21 (SUB_RANGE_SIZE of 2MB) and 51. Sub ranges are used by TDH.MEM.SCAN for multithreaded scanning. A SUB_RANGE_SIZE value equal or higher than the range size forces the range scan to be single threaded.
63:58	RESERVED	Must be 0

5.4.34.3.3. Memory Scan Control Pages

Up to 4 physical pages are allocated by TDH.MEM.SCAN.CONFIG, based on input parameters CX0_HPA through CX3_HPA, to hold control information for the comprehensive memory scan. The required number of scan control pages is enumerated by NUM_MEM_SCAN_CONTROL_PAGES, readable by TDH.SYS.RD*.

TDH.MEM.SCAN.CONFIG indicates whether a provided physical page is not used by it, e.g., because a scan control page has already been allocated by a previous call to TDH.MEM.SCAN.CONFIG, by setting bit 63 of the applicable output operand.

Physical control structure pages allocated by TDH.MEM.SCAN.CONFIG can only be reclaimed as part of the TD's teardown sequence.

5.4.34.3.4. Dynamic PAMT

If the TDX module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for a control page. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.34.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.137: TDH.MEM.SCAN.CONFIG Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Range list page	N/A	R	Shared	4KB	N/A	N/A	N/A
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared
Explicit	R8	HPA	Control page 0	N/A	RW	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R9	HPA	Control page 1	N/A	RW	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R10	HPA	Control page 2	N/A	RW	Opaque	4KB	Exclusive	Shared	Shared
Explicit	R11	HPA	Control page 3	N/A	RW	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	4KB	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared(h)	N/A	N/A
Implicit	N/A	N/A	Comprehensive scan state	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	All comprehensive scan contexts	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.34.5. Completion Status Codes

Table 5.138: TDH.MEM.SCAN.CONFIG Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_MEM_SCAN_CONFIG_ALREADY_DONE	
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	Operation is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.35. TDH.MEM.SCAN.RANGE Leaf

Unreleased Feature: TDH.MEM.SCAN.* is a set of interface functions that will be provided with Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Scan a range of the TD's private GPA space and perform the requested operation.

5.4.35.1. Input Operands

Table 5.139: TDH.MEM.SCAN.RANGE Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 92
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	LIST_OF_LISTS_INFO	Information for GPA list-of-lists in shared memory. For details, see the description below, in 5.4.32.1 and in 3.13.2. LIST_OF_LISTS_INFO is only applicable for operations that require a GPA list input, i.e., when OPERATION is DSCAN (see below). For other operations (e.g., EXPORT_RESTORE), LIST_OF_LISTS_INFO must be 0. If applicable: • FORMAT must be LIST_OF_LISTS (2). • FIRST_ENTRY must be 0. • LAST_ENTRY contains the index of the last valid entry in the GPA List Info page, i.e., the provided number of GPA List Info pages - 1.		
RDX	TDR	HPA of the source TD's TDR page (HKID bits must be 0)		
R8	CONTROLS	Controls fields:		
		Bits	Field	Description
		7:0	OPERATION	Identifies the requested operation – see the table below Enumeration: See below for details.
		15:8	QUALIFIER	Additional qualification of the requested operation
		62:16	RESERVED	Reserved, must be 0
		63	IGNORED	This bit is ignored.
R9	RANGE_START	The start address of the private GPA range to scan RANGE_START must be a valid private GPA, aligned on 4KB.		
R10	RANGE_SIZE	The size of the GPA range to scan RANGE_SIZE must not be 0 and must be a multiple of 4KB. Bits 63:52 must be 0.		

Operand	Name	Description
R11	OVERALL_NEXT_ENTRY	The next overall index of the GPA List entry to be written by TDH.MEM.SCAN.COMP. For details, see the description below and in 5.4.32.1. OVERALL_NEXT_ENTRY is only applicable for operations that require a GPA list input, i.e., when OPERATION is DSCAN (see below). For other operations (e.g., EXPORT_RESTORE), OVERALL_NEXT_ENTRY must be 0. If applicable, OVERALL_NEXT_ENTRY must be between 0 and $512 * (\text{LIST\_OF\_LISTS\_INFO.LAST\_ENTRY} + 1) - 1$.

5.4.35.2. Output Operands

Table 5.140: TDH.MEM.SCAN.RANGE Output Operands Definition

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
R9	NEXT_START	The first GPA for next scan, aligned on 4KB On any error or interruption, NEXT_START is updated to the address of the memory last successfully scanned so far + 1; see the description below for details. On successful end of the range scan, NEXT_START is set to the minimum of (RANGE_START + RANGE_SIZE, private GPA space size).
R10	REMAINING_SIZE	The remaining size of the GPA range to scan, in multiples of 4KB On any error or interruption, RAMAINING_SIZE is updated to RANGE_SIZE minus the size of the memory successfully scanned so far; see the description below for details. On successful end of the range scan, set to 0.
R11	OVERALL_NEXT_ENTRY	The overall index of the next available GPA List entry. For details, see the description below and in 5.4.32.1. OVERALL_NEXT_ENTRY is only applicable for operations that require a GPA list input, i.e., when OPERATION is DSCAN (see below). For other operations (e.g., EXPORT_RESTORE), OVERALL_NEXT_ENTRY returns 0.
Other		Unmodified

5.4.35.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.35.3.1. Overview

TDH.MEM.SCAN.RANGE scans the requested TD's GPA range and performs the requested operation. Most operations fill page information in the returned GPA lists.

5.4.35.3.2. Enumeration

TDH.MEM.SCAN.RANGE is supported if any of its operations are enumerated as available. See the operation modes table below for details. If not supported, calling TDH.MEM.SCAN returns a TDX_OPERAND_INVALID(RAX) status.

5.4.35.3.3. Operation Modes and Qualifiers

TDH.MEM.SCAN.RANGE supports multiple operation modes as detailed below. Some TDH.MEM.SCAN.RANGE operation modes are available only if the TDX module is configured for non-blocking export. Operation modes may have qualifiers.

Table 5.141: TDH.MEM.SCAN.RANGE Operation Modes

OPERATION Value	Name	Description
0	DSCAN	Scan for export candidates. DSCAN is only available if the TDX module is configured for non-blocking export. Enumeration: DSCAN support is enumerated by TDX_FEATURES0.NON_BLOCKING_EXPORT (bit 41), readable by TDH.SYS.RD* (see 3.3.3.1). DSCAN has two sub modes, selected by the QUALIFIER input: 0: EXPORT: Scan and return a GPA list of memory pages that either have not been exported or need to be re-exported. 1: REEXPORT: Scan and return a GPA list of memory pages that need to be re-exported. Other: Reserved
2	EXPORT_RESTORE	Restore SEPT entries state after an export session has been aborted by TDH.EXPORT.ABORT. EXPORT_RESTORE does not return a page list; LIST_OF_LISTS_INFO is ignored. Enumeration: EXPORT_RESTORE support is enumerated by TDX_FEATURES0.SCAN_EXPORT_RESTORE (bit 43), readable by TDH.SYS.RD* (see 3.3.3.1).
Other	RESERVED	Reserved

5.4.35.3.3.1. DSCAN Details

DSCAN skips SEPT sub-tree that are in a BLOCKED state, i.e.:

- If DSCAN encounters a blocked non-leaf SEPT entry, it skips it (and the whole GPA range that is mapped by it).
- If DSCAN encounters a blocked leaf SEPT entry, it skips that entry.

5.4.35.3.3.2. EXPORT_RESTORE Details

EXPORT_RESTORE stops if there is an SEPT sub-tree that is blocked. If EXPORT_RESTORE encounters non-leaf SEPT entry whose state is NL_BLOCKED, it aborts and returns a TDX_GPA_RANGE_BLOCKED status. The host VMM can determine the blocked range using the NEXT_START output operand.

EXPORT_RESTORE does not stop if a leaf SEPT entry is blocked.

5.4.35.3.4. Concurrency

TDH.MEM.SCAN.RANGE may be called concurrently on multiple LPs and may run concurrently with other functions (e.g., TDH.EXPORT.MEM).

5.4.35.3.4.1. Memory Page Concurrency

TDH.MEM.SCAN.RANGE may not detect pages that are concurrently added to the TD, or whose state or attributes (including the Dirty bit) are concurrently modified, while scan is in progress.

5.4.35.3.4.2. SEPT Tree Concurrency

TDH.MEM.SCAN.RANGE acquires a shared lock on the SEPT trees, to prevent blocking or changes to the tree structure (e.g., by TDH.MEM.RANGE.BLOCK or TDH.MEM.SEPT.REMOVE) while TDH.MEM.SCAN.RANGE is in progress. Note that this lock does not prevent SEPT tree structure modification when TDH.MEM.SCAN.RANGE is not executing (e.g., it was interrupted).

TDH.MEM.SCAN.RANGE may prevent starvation of concurrent memory management functions by detecting that they failed to acquire an exclusive lock on the SEPT trees. In this case, TDH.MEM.SCAN.RANGE yields and returns with a

TDX_INTERRUPTED_BUSY Status in RAX. The host VMM is expected to resume TDH.MEM.SCAN.RANGE. See the discussion on interruptibility below.

5.4.35.3.4.3. SEPT Entry Concurrency

If TDH.MEM.SCAN.RANGE fails to acquire a lock on an SEPT entry, behavior depends on the requested operation:

- 5 • For a DSCAN operation, TDH.MEM.SCAN.RANGE skips the busy SEPT entry.
Note: Non-blocking export is designed to ensure that such entries will be scanned at least once by DCHECK. For details, see the [TD Migration Spec].
- For an EXPORT_RESTORE operation, TDH.MEM.SCAN.RANGE returns with a TDX_INTERRUPTED_BUSY Status in RAX. The host VMM is expected to resume TDH.MEM.SCAN.RANGE. See the discussion on interruptibility below.

10 5.4.35.3.5. GPA List-of-Lists Processing

Processing of the GPA list-of-list by TDH.MEM.SCAN.COMP and by TDH.MEM.SCAN.RANGE is similar; thus, it is described in 5.4.32.1.

5.4.35.3.6. TLB Tracking

- 15 For the DSCAN operation, TDH.MEM.SCAN.RANGE records the current TD epoch (in the PAMT entry for that page). This allows TDH.EXPORT.MEM to check TLB tracking to help ensure that EPT translation caches have been flushed before the page is exported. Unlike write-blocking based export, TLB tracking is page-specific, allowing TDH.MEM.SCAN.RANGE(DSCAN) of a certain GPA range to run concurrently with TDH.EXPORT.MEM of another range.

For the EXPORT_RESTORE operation, TDH.MEM.SCAN.RANGE does not record the current TD epoch.

5.4.35.3.7. Interruption and Resumption

- 20 TDH.MEM.SCAN.RANGE is interruptible and resumable. An interruption occurs in the following cases:
- If a pending interrupt is detected during operation, TDH.MEM.SCAN.RANGE returns with a TDX_INTERRUPTED_RESUMABLE status in RAX.
 - If TDH.MEM.SCAN.RANGE fails to acquire a lock on an SEPT entry during an EXPORT_RESTORE operation, it returns with a TDX_INTERRUPTED_BUSY Status in RAX.
 - 25 • If TDH.MEM.SCAN.RANGE detects that a concurrent function (such as TDH.MEM.PAGE.PROMOTE) has failed to acquire an exclusive lock on the SEPT trees, it may yield and return with a TDX_INTERRUPTED_BUSY Status in RAX.
 - A GPA list-of-lists full condition has been detected. In this case, TDH.MEM.SCAN.COMP returns with a TDX_INTERRUPTED_LIST_FULL status.

In all cases, the following are updated with the range information and the next list entry index to process:

- 30
- NEXT_START (in R9)
 - REMAINING_SIZE (in R10)
 - OVERALL_NEXT_ENTRY (in R11)

Except for the GPA list-of-lists full case, the host VMM may re-invoke TDH.MEM.SCAN.RANGE soon after handling the interrupt. To resume after a GPA list-of-lists full case, the host VMM must provide a list-of-lists with available entries.

35 See 5.4.32.1 for details.

5.4.35.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.142: TDH.MEM.SCAN.RANGE Memory Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	GPA list info page	HPA	RW	Shared	4KB	None	None	None

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	N/A	N/A	GPA list pages (via GPA list info page)	HPA	RW	Shared	4KB	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	R9	GPA	GPA range	GPA	R	Private	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.35.5. Completion Status Codes

Table 5.143: TDH.MEM.SCAN.RANGE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_GPA_RANGE_BLOCKED	Returned only if OPERATION is EXPORT_RESTORE
TDX_INTERRUPTED_BUSY	
TDX_INTERRUPTED_LIST_FULL	The output GPA lists are full.
TDX_INTERRUPTED_RESUMABLE	
TDX_MEM_SCAN_FAILED_BLOCKED_RANGE	
TDX_MEM_SCAN_FAILED_OTHER_THREAD	
TDX_MEM_SCAN_FAILED_PREPARE_REQUIRED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	Operation is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	

Completion Status Code	Description
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCS_PAGES_REQUIRED	

5.4.36. TDH.MEM.SCAN.RESET Leaf

Unreleased Feature: TDH.MEM.SCAN.* is a set of interface functions that will be provided with Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Reset the TDX module's comprehensive memory scan internal state for the specified TD.

5.4.36.1. Input Operands

Table 5.144: TDH.MEM.SCAN.RESET Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 95
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RDX	TDR	HPA of the source TD's TDR page (HKID bits must be 0)		

5.4.36.2. Output Operands

10 **Table 5.145: TDH.MEM.SCAN.RESET Output Operands Definition**

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code, see 5.4.1
Other		Unmodified

5.4.36.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

15 5.4.36.3.1. Overview

TDH.MEM.SCAN.RESET resets the internal state held by the TDX module for comprehensive memory scans of the specified TD's GPA address space. It is typically used if a scan by TDH.MEM.SCAN.COMP failed, before attempting a new scan.

5.4.36.3.2. Enumeration

- 20 TDH.MEM.SCAN.RESET is supported if TDH.MEM.SCAN.COMP is supported. If not supported, calling TDH.MEM.SCAN.RESET returns a TDX_OPERAND_INVALID(RAX) status.

5.4.36.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.146: TDH.MEM.SCAN.RANGE Memory Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	R9	GPA	GPA range	GPA	R	Private	4KB	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Comprehensive scan state	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	All comprehensive scan contexts	N/A	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.36.5. Completion Status Codes**Table 5.147: TDH.MEM.SCAN.RESET Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	Operation is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
Unreleased feature: Status list is not complete	

5.4.37. TDH.MEM.SEPT.ADD Leaf

Add and map 4KB L1 and L2 Secure EPT pages to a TD.

5.4.37.1. Input Operands**Table 5.148: TDH.MEM.SEPT.ADD Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 3
	23:16	Version Number	Selects the SEAMCALL interface function version Versions 0 and 1 are supported. See the enumeration details below.
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the non-leaf Secure EPT entry that will map the new Secure EPT page – see 3.6.1 Level must be between 1 and 3 for a 4-level EPT or between 1 and 4 for a 5-level EPT.
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address of to be mapped for the new Secure EPT page Depending on the level, the following least significant bits must be 0: Level 1 (EPT): Bits 20:12 Level 2 (EPD): Bits 29:12 Level 3 (EPDPT): Bits 38:12 Level 4 (EPML4): Bits 47:12
	63:52	Reserved	Reserved: must be 0
RDX	TD handle and flags:		
	Bits	Name	Description
	0	ALLOW_EXISTING	Flags that TDH.MEM.SEPT.ADD should not fail if an SEPT page to be added already exists in the L1 or L2 SEPT tree. Instead, it should just return an indication in the output operand, as described below.
	11:1	Reserved	Reserved: must be 0
	51:12	TDR_HPA	Bits 51:12 of the host physical address of the parent TDR page (HKID bits must be 0)
	63:52	Reserved	Reserved: must be 0
R8	Host physical address of the new L1 Secure EPT page to be added to the TD (HKID bits must be 0) For TDH.MEM.SEPT.ADD version 1 or higher: If the value of R8 is NULL_PA (-1), no L1 SEPT page is added.		

Operand	Description
	Else, bit 63 of R8 is ignored.
R9	For TDH.MEM.SEPT.ADD version 1 or higher, R9 specifies the HPA of a new L2 VM #1 Secure EPT page to be added to the TD (HKID bits must be 0). - If the value of R9 is NULL_PA (-1), no L2 VM #1 SEPT page is added. - Else, bit 63 of R9 is ignored.
R10	For TDH.MEM.SEPT.ADD version 1 or higher, R10 specifies the HPA of a new L2 VM #2 Secure EPT page to be added to the TD (HKID bits must be 0). - If the value of R10 is NULL_PA (-1), no L2 VM #2 SEPT page is added. - Else, bit 63 of R10 is ignored.
R11	For TDH.MEM.SEPT.ADD version 1 or higher, R11 specifies the HPA of a new L2 VM #3 Secure EPT page to be added to the TD (HKID bits must be 0). - If the value of R11 is NULL_PA (-1), no L2 VM #3 SEPT page is added. - Else, bit 63 of R11 is ignored.

5.4.37.2. Output Operands

Table 5.149: TDH.MEM.SEPT.ADD Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RCX is unmodified. Else, RCX returns extended error information part 1. In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page; it may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	In case of an interruption, as indicated by RAX returning TDX_INTERRUPTED_RESUMABLE, RDX is unmodified. Else, RDX returns extended error information part 2. In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
R8	For TDH.MEM.SEPT.ADD version 1 or higher: - If a provided L1 SEPT page has been added, R8 returns NULL_PA (-1). - Else, if an L1 SEPT page already exists, bit 63 of R8 is set to 1, other bits are unmodified. - Else, bit 63 of R8 is cleared to 0, other bits are unmodified. For TDH.MEM.SEPT.ADD version 0, R8 is unmodified.

Operand	Description
R9	For TDH.MEM.SEPT.ADD version 1 or higher: • If a provided L2 VM #1 SEPT page has been added, R9 returns NULL_PA (-1). • Else, if an L2 VM #1 SEPT page already exists, bit 63 of R9 is set to 1, other bits are unmodified. • Else, bit 63 of R9 is cleared to 0, other bits are unmodified. For TDH.MEM.SEPT.ADD version 0, R9 is unmodified.
R10	For TDH.MEM.SEPT.ADD version 1 or higher: • If a provided L2 VM #2 SEPT page has been added, R10 returns NULL_PA (-1). • Else, if an L2 VM #2 SEPT page already exists, bit 63 of R10 is set to 1, other bits are unmodified. • Else, bit 63 of R10 is cleared to 0, other bits are unmodified. For TDH.MEM.SEPT.ADD version 0, R10 is unmodified.
R11	For TDH.MEM.SEPT.ADD version 1 or higher: • If a provided L2 VM #3 SEPT page has been added, R11 returns NULL_PA (-1). • Else, if an L2 VM #3 SEPT page already exists, bit 63 of R11 is set to 1, other bits are unmodified. • Else, bit 63 of R11 is cleared to 0, other bits are unmodified. For TDH.MEM.SEPT.ADD version 0, R11 is unmodified.
Other	Unmodified

5.4.37.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.37.3.1. Overview

TDH.MEM.SEPT.ADD adds a set of 4KB Secure EPT pages to a TD and maps them to the provided GPA and level. SEPT pages can be added to the main (L1) SEPT tree and/or to one or more of the L2 VMs' SEPT trees. TDH.MEM.SEPT.ADD initializes the SEPT pages to hold 512 free entries using the TD's ephemeral private key.

L2 SEPT trees may not be deeper than the L1 SEPT tree. To add an L2 SEPT page at some level, there must either already be an L1 SEPT page at that level, or an L1 SEPT page at that level is being added by the current TDH.MEM.SEPT.ADD invocation.

5.4.37.3.2. Enumeration

Availability of TDH.MEM.SEPT.ADD version 1 is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.MEM.SEPT.ADD with a version number higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

5.4.37.3.3. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for one of the new SEPT pages. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.37.3.4. Interruptibility

If a version number higher than 0 is specified on input, TDH.MEM.SEPT.ADD is interruptible. If a pending interrupt is detected during operation, TDH.MEM.SEPT.ADD returns with a TDX_INTERRUPTED_RESUMABLE status in RAX. The SEPT page HPA values in R8, R9, R10 and R11 are updated.

TDH.MEM.SEPT.ADD is designed to be invoked in a loop until all required SEPT pages have been added:

1. Call TDH.MEM.SEPT.ADD.
2. While RAX indicates TDX_INTERRUPTED_RESUMABLE:
 - 2.1. Call TDH.MEM.SEPT.ADD with the GPR values as returned by the previous call.
 - 2.2. If an error indication other than TDX_INTERRUPTED_RESUMABLE is returned, abort.

5.4.37.3.5. SEPT Page HPA Input and Output Operands

The table below shows the values of the SEPT HPA arguments in R8 – R11 when version 1 or higher is selected and no error occurs (RAX returns TDX_SUCCESS or TDX_INTERRUPTED_RESUMABLE).

Table 5.150: Meaning of TDH.MEM.SEPT.ADD's SEPT HPA Arguments on Input and Output (Version > 0, No Error)

Value	R8 – R11 on Input	R8 – R11 on Output
NULL_PA (-1)	No new SEPT page to add	New SEPT page has been added
Bits 62:0: Valid HPA, HKID bits are 0 Bit 63: 0	Bits 62:0: HPA of new SEPT page to add Bit 63: Ignored	N/A
Bits 62:0: Valid HPA, HKID bits are 0 Bit 63: 1		SEPT page already exists, new SEPT page has not been used

5.4.37.3.6. Atomicity

Unless terminated with a TDX_INTERRUPTED_RESUMABLE indication, TDH.MEM.SEPT.ADD either fully succeeds in adding the requested SEPT pages or doesn't add any page.

In case of an interrupt (TDX_INTERRUPTED_RESUMABLE), if the host VMM invokes TDH.MEM.SEPT.ADD in a loop as described above and doesn't initiate other operations that impact TDH.MEM.SEPT.ADD (e.g., TDH.MEM.RANGE.BLOCK), then this atomicity still holds at the end of the loop.

5.4.37.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.151: TDH.MEM.SEPT.ADD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA and Level	Secure EPT page (GPA) ²⁸	SEPT_PAGE	RW	Private	2 ^{12+9*Level} Bytes	N/A	N/A	N/A
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared
Explicit	R8	HPA	Secure EPT page (HPA) ²⁸	SEPT_PAGE	RW	Private	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT tree	N/A	RW	Private	N/A	Shared	N/A	N/A

²⁸ RCX and R8 denote the same Secure EPT page operand, using HPA and GPA respectively

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT trees	N/A	RW	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.37.5. Completion Status Codes

Table 5.152: TDH.MEM.SEPT.ADD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_INTERRUPTED_RESUMABLE	TDH.MEM.SEPT.ADD's operation has been interrupted by an external event; it may be resumed from the point where it was interrupted by calling it again.
TDX_L2_SEPT_ENTRY_NOT_FREE	
TDX_L2_SEPT_WALK_FAILED	
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.SEPT.ADD is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.38. TDH.MEM.SEPT.RD Leaf

Read a Secure EPT entry.

Table 5.153: TDH.MEM.SEPT.RD Input Operands Definition

Operand		Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 25
		23:16	Version Number	Selects the SEAMCALL interface function version
		63:24	Reserved	Must be 0
RCX	GPA Mapping	EPT mapping information:		
		Bits	Name	Description
		2:0	Level	Level of the Secure EPT entry to read – see 3.6.1 Level must be between 0 and 3 for a 4-level EPT or between 0 and 4 for a 5-level EPT.
		11:3	Reserved	Reserved: must be 0
		51:12	GPA	Bits 51:12 of the guest physical address for the Secure EPT entry to read Depending on the level, the following least significant bits must be 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12 Level 3 (EPML4E): Bits 38:12 Level 4 (EPML5E): Bits 47:12
		63:52	Reserved	Reserved: must be 0
RDX	TD Handle and Flags	TD handle and flags:		
		Bits	Name	Description
		0	READ_L2_ATTR	Flags that L2 attributes should be returned in R8
		11:1	Reserved	Reserved: must be 0
		51:12	HPA	Bits 51:12 of the host physical address of the parent TDR page (HKID bits must be 0)
		63:52	Reserved	Reserved: must be 0

Table 5.154: TDH.MEM.SEPT.RD Output Operands Definition

Operand		Description
RAX	Status	SEAMCALL instruction return code – see 5.4.1

Operand		Description
RCX	SEPT Entry	Secure EPT entry architectural content – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page; it may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. - In case of successful operation, the requested entry's architectural content is returned. - In case of EPT walk error, the architectural content of the Secure EPT entry where the error was detected is returned. In other cases, RCX returns 0.
RDX	SEPT Level and State	Secure EPT entry level and state – see 3.6.2 - In case of successful operation, the requested entry's information is returned. - In case of EPT walk error, the information of the Secure EPT entry where the error was detected is returned. In other cases, RDX returns 0.
R8	L2 Attributes	If the TD's ATTRIBUTES.DEBUG is 1 and READ_L2_ATTR is 1, R8 returns the L2 attributes of the applicable L2 SEPT entries, in the format defined in 3.6.3. Else, R8 is unmodified.
Other	N/A	Unmodified

5.4.38.1. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

- TDH.MEM.SEPT.RD reads a Secure EPT entry. If the TD's ATTRIBUTES.DEBUG is 1, then TDH.MEM.SEPT.RD can return the page's L2 attributes.

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.155: TDH.MEM.SEPT.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA and Level	Secure EPT entry	SEPT_ENTRY	R	Private	$2^{12+9*\text{Level}}$ Bytes	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT Tree	N/A	R	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive	N/A	N/A

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	GPA	L2 Secure EPT Tree	N/A	R	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.38.2. Completion Status Codes

Table 5.156: TDH.MEM.SEPT.RD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_WALK_FAILED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.SEPT.RD is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.39. TDH.MEM.SEPT.REMOVE Leaf

Remove an empty L1 Secure EPT page and any associated L2 SEPT pages from a TD.

5.4.39.1. Input Operands**Table 5.157: TDH.MEM.SEPT.REMOVE Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 30
	23:16	Version Number	Selects the SEAMCALL interface function version Versions 0 and 1 are supported. See the enumeration details below.
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the non-leaf Secure EPT entry that maps the Secure EPT page to be removed – see 3.6.1 Level must be between 1 and 3 for a 4-level EPT or between 1 and 4 for a 5-level EPT.
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address for the Secure EPT page to be removed Depending on the level, the following least significant bits must be 0: Level 1 (EPT): Bits 20:12 Level 2 (EPD): Bits 29:12 Level 3 (EPDPT): Bits 38:12 Level 4 (EPML4): Bits 47:12
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		

5.4.39.2. Output Operands**Table 5.158: TDH.MEM.SEPT.REMOVE Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1

Operand	Description
RCX	If TDH.MEM.SEPT.REMOVE succeeded: - RCX returns the HPA of the removed L1 SEPT page (HKID bits are set to 0). - If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L1 SEPT page are free. In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
R9	If TDH.MEM.SEPT.REMOVE version is 1 or higher: - If L2 VM #1's L2 SEPT page has been removed, R9 returns the HPA of that SEPT page (HKID bits are set to 0). If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L2 #1 SEPT page are free. - Else, R9 returns NULL_PA (-1). Else, R9 is unmodified.
R10	If TDH.MEM.SEPT.REMOVE version is 1 or higher: - If L2 VM #2's L2 SEPT page has been removed, R10 returns the HPA of that SEPT page (HKID bits are set to 0). If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L2 #2 SEPT page are free. - Else, R10 returns NULL_PA (-1). Else, R10 is unmodified.
R11	If TDH.MEM.SEPT.REMOVE version is 1 or higher: - If L2 VM #3's L2 SEPT page has been removed, R11 returns the HPA of that SEPT page (HKID bits are set to 0). If the TDX Module has been configured for Dynamic PAMT, then bit 62 serves as a dynamic PAMT removal hint; it indicates that all entries in the PAMT page pair mapping the removed L2 #3 SEPT page are free. - Else, R11 returns NULL_PA (-1). Else, R11 is unmodified.
Other	Unmodified

5.4.39.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.39.3.1. Overview

TDH.MEM.SEPT.REMOVE removes an empty Secure EPT page or pages, with all 512 entries marked as FREE, from the TD's Secure EPT trees.

The L1 SEPT page and all existing L2 SEPT pages at the requested GPA and level are removed.

- 5 On successful operation, it TDH.MEM.SEPT.REMOVE marks the removed 4KB physical pages as free in PAMT.

5.4.39.3.2. Enumeration

Availability of TDH.MEM.SEPT.REMOVE version 1 is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.MEM.SEPT.REMOVE with a version number higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

- 10 Support of dynamic PAMT is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36).

5.4.39.3.3. Blocking and TLB Tracking

If the TD may be running, the removed GPA range must be blocked and TLB tracked. Else (e.g., TDH.MR.FINALIZE has not yet been executed, or the TD has been paused for export), no blocking and tracking is required.

5.4.39.3.4. Dynamic PAMT

- 15 If the TDX Module is configured for dynamic PAMT, bit 62 of RCX, R9, R10 and R11 are returned as hints indicating that all entries in the PAMT pages mapping the respective removed SEPT pages are free, and they can be removed using TDH.PHYMEM.PAMT.REMOVE.

Note: If the same PAMT pages map more than one of the removed SEPT pages, bit 62 may indicate so in only one of RCX, R9, R10 and R11.

- 20 **5.4.39.3.5. Atomicity**

TDH.MEM.SEPT.REMOVE either fully succeeds in removing the requested SEPT pages or doesn't remove any page.

5.4.39.3.6. Removed Page Initialization

On platforms which do not use ACT, after the SEPT pages have been removed, the host VMM should initialize their content before they are reused as non-private pages, as described in the [Base Spec].

- 25 **5.4.39.4. Operands Information**

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.159: TDH.MEM.SEPT.REMOVE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA and Level	Secure EPT page	SEPT_PAGE	R	Private	$2^{12+9*\text{Level}}$ Bytes	Exclusive	None	None
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT Tree	N/A	RW	Private	N/A	Exclusive	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)	N/A	N/A

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	GPA	L2 Secure EPT Trees	N/A	RW	Private	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.39.5. Completion Status Codes

Table 5.160: TDH.MEM.SEPT.REMOVE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_EPT_WALK_FAILED	
TDX_GPA_RANGE_NOT_BLOCKED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MEM.SEPT.REMOVE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	

5.4.40. TDH.MEM.SHARED.SEPT.WR Leaf

Add mapping of a Shared GPA range from Secure EPT into Shared EPT pages.

Table 5.161: TDH.MEM.SHARED.SEPT.WR Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 163
	23:16	Version Number	Selects the SEAMCALL interface function version Versions 0 and 1 are supported. See the enumeration details below.
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the Secure EPT entry to write Level must be the level of the Secure EPT page which is indexed by the GPA Shared bit (i.e., GPAW + 3).
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the shared guest physical address for the Secure EPT entry to write. Depending on the level, the following least significant bits must be 0: Level 3 (EPML4E): Bits 38:12 Level 4 (EPML5E): Bits 47:12
	63:52	Reserved	Reserved: must be 0
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		
R8	If the requested version is 1 or higher and the value of R8 is NULL_PA (-1), R8 is ignored. Else, R8 specifies a value to be written to the applicable L1 EPT entry.		
R9	If the requested version is 0, R9 is ignored. Else (the requested version is 1 or higher), the number of L2 VMs is ≥ 1 and the value of R9 is not NULL_PA (-1), R9 specifies a value to be written to the applicable L2 VM #1 Secure EPT entry. Else, R9 is ignored.		
R10	If the requested version is 0, R10 is ignored. Else (the requested version is 1 or higher), the number of L2 VMs is ≥ 2 and the value of R10 is not NULL_PA (-1), R10 specifies a value to be written to the applicable L2 VM #2 Secure EPT entry. Else, R10 is ignored.		
R11	If the requested version is 0, R11 is ignored. Else (the requested version is 1 or higher), the number of L2 VMs is ≥ 3 and the value of R11 is not NULL_PA (-1), R11 specifies a value to be written to the applicable L2 VM #3 Secure EPT entry. Else, R11 is ignored.		

Table 5.162: TDH.MEM.SHARED.SEPT.WR Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry architectural content where the error was detected – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page; it may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, Secure EPT entry level and state where the error was detected – see 3.6.2 In other cases, RDX returns 0.
Other	Unmodified

5.4.40.1. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.40.1.1. Overview

TDH.MEM.SHARED.SEPT.WR enables the host VMM to write Secure EPT entries associated with Shared EPT, to map Shared EPT pages. This is required to allow TDX Connect devices DMA translations of shared GPAs using the Secure EPT root page. Only SEPT entries at the level corresponding to the SHARED bit, and associated with a SHARED bit value of 1, are allowed to be written.

TDH.MEM.SHARED.SEPT.WR updates the L1 SEPT tree and all L2 SEPT trees (per the number of L2 VMs configured for the TD).

5.4.40.1.2. Enumeration

Availability of TDH.MEM.SHARED.SEPT.WR is enumerated by TDX_FEATURES0.TDX_CONNECT (bit 6), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.MEM.SHARED.SEPT.WR returns a TDX_OPERAND_INVALID(RAX) status.

Availability of TDH.MEM.SHARED.SEPT.WR version 1 or higher is enumerated by TDX_FEATURES0.TDX_CONNECT_PARTITIONING (bit 32).

5.4.40.2. Operands Information

To understand the table and text below, please refer to the [TDX Module Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.163: TDH.MEM.SHARED.SEPT.WR Operands Information Definition

Explicit/ Implicit	Reg.	Ref. Type	Resource	Resource Type	Access	Access Semantics	Align. Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA and Level	L1 Secure EPT entry	SEPT_ENTRY	R	Private	$2^{12+9*Level}$ Bytes	None	None	None

Explicit/ Implicit	Reg.	Ref. Type	Resource	Resource Type	Access	Access Semantics	Align. Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L1 Secure EPT Tree	N/A	R	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT Trees	N/A	R	Private	N/A	Shared(i)	N/A	N/A
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	None	N/A	N/A

5.4.40.3. Completion Status Codes

Table 5.164: TDH.MEM.SHARED.SEPT.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_WALK_FAILED	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_TDCS_NOT_ALLOCATED	
TDX_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TD_NOT_INITIALIZED	

5.4.41. TDH.MEM.TRACK Leaf

Increment the TD's TLB epoch counter.

5.4.41.1. Input Operands

Table 5.165: TDH.MEM.TRACK Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 38
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of the parent TDR page (HKID bits must be 0)		

5.4.41.2. Output Operands

Table 5.166: TDH.MEM.TRACK Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.41.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MEM.TRACK increments the TD's TLB epoch counter. It is used as part of the TLB invalidation tracking sequence, e.g., after blocking a memory page using TDH.MEM.RANGE.BLOCK and before removing it using TDH.MEM.PAGE.REMOVE. The host VMM typically follows TDH.MEM.TRACK with a round of IPIs to force all the TD VCPUs to TD-exit, which caused TLB invalidation on the following TD entry. For details, see the [TDX Module Base Spec] discussion of TLB tracking.

If TDH.MEM.TRACK is called when there are still active TD VCPUs that started running (i.e., TDH.VP.ENTER) before the previous TDH.MEM.TRACK, it will fail with a TDX_PREVIOUS_TLB_EPOCH_BUSY status.

5.4.41.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.167: TDH.MEM.TRACK Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	TDCS structure	TDR	RW	Opaque	4KB	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	TDCS Epoch Tracking Fields	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A

5.4.41.5. Completion Status Codes

Table 5.168: TDH.MEM.TRACK Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation. Note the special case where the indicated operand is TLB_EPOCH. This may happen due to a conflict with TDH.VP.ENTER. The host VMM should retry TDH.MEM.TRACK.
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PREVIOUS_TLB_EPOCH_BUSY	
TDX_SUCCESS	TDH.MEM.TRACK is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.42. TDH.MEM.WR Leaf

5.4.42.1. Input Operands

Write a 64b chunk from a debuggable guest TD private memory.

Table 5.169: TDH.MEM.WR Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 14
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The guest physical address of a naturally aligned 8-byte chunk of a guest TD private page		
RDX	Host physical address of the parent TDR page (HKID bits must be 0)		
R8	Data to be written to memory		

5.4.42.2. Output Operands

Table 5.170: TDH.MEM.WR Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	Secure EPT entry architectural content – see 3.6.2 The architectural content represents how the Secure EPT maps a private memory page or a Secure EPT page and may be different than the actual contents of the Secure EPT entry. Software should consult the Secure EPT information returned in RDX. - In case of successful operation, the requested entry's architectural content is returned. - In case of EPT walk error, the architectural content of the Secure EPT entry where the error was detected is returned. In other cases, RCX returns 0.
RDX	Secure EPT entry level and state – see 3.6.2 - In case of successful operation, the requested entry's information is returned. - In case of EPT walk error, the information of the Secure EPT entry where the error was detected is returned. In other cases, RDX returns 0.
R8	Previous content of the memory chunk In case of an error, as indicated by RAX, R8 returns 0
Other	Unmodified

5.4.42.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MEM.WR writes a 64b chunk to a debuggable guest TD private memory.

- 5 If the debuggable TD is also migratable (ATTRIBUTES.MIGRATABLE is set to 1), TDH.MEM.WR is not allowed.

5.4.42.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.171: TDH.MEM.WR Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA	TD private memory	Blob	RW	Private	8B	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	Secure EPT tree	N/A	R	Private	N/A	Shared	N/A	N/A
Implicit	N/A	GPA	Secure EPT entry	SEPT Entry	R	Private	N/A	Exclusive	N/A	N/A

10

5.4.42.5. Completion Status Codes

Table 5.172: TDH.MEM.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_DEBUG_MEM_NOT_WRITABLE	
TDX_EPT_ENTRY_NOT_PRESENT	
TDX_EPT_ENTRY_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.43. TDH.MIG.STREAM.CREATE Leaf

Create a Migration Stream and its MIGSC control structure.

5.4.43.1. Input Operands

Table 5.173: TDH.MIG.STREAM.CREATE Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 96
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a page where MIGSC will be created		
RDX	The physical address of the owner TDR page (HKID bits must be 0)		

5.4.43.2. Output Operands

Table 5.174: TDH.MIG.STREAM.CREATE Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.43.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.43.3.1. Overview

TDH.MIG.STREAM.CREATE creates a new Migration Stream and its MIGSC control structure. This function can be invoked at any time after the TDCS pages have been allocated.

TDH.MIG.STREAM.CREATE can only be successfully invoked if no migration session is in progress.

5.4.43.3.2. Enumeration

Availability of TDH.MIG.STREAM.CREATE is enumerated by TDX_FEATURES0.TD_MIGRATION (bit 0), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.EXPORT.ABORT returns a TDX_OPERAND_INVALID(RAX) status.

The maximum number of migration streams per TD is enumerated by MAX_MIGS.

5.4.43.3.3. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for the new MIGSC page. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.43.3.4. Control Structure Pages

Physical MIGSC pages allocated by TDH.MIG.STREAM.CREATE can only be reclaimed as part of the TD's teardown sequence.

5.4.43.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.175: TDH.MIG.STREAM.CREATE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	MIGSC page	MIGSC	RW	Opaque	4KB	Exclusive	Shared	Shared
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	4KB	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(h)	N/A	N/A
Implicit	N/A	N/A	Migration context	N/A	RW	Opaque	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	Mig. Stream context	Mig. Stream context	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5

5.4.43.5. Completion Status Codes

Table 5.176: TDH.MIG.STREAM.CREATE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MIG.STREAM.CREATE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.44. TDH.MNG.ADDCX Leaf

Add a TDCS physical page to a guest TD.

5.4.44.1. Input Operands

Table 5.177: TDH.MNG.ADDCX Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 1
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a page where TDCX will be added (HKID bits must be 0)		
RDX	The physical address of the owner TDR page (HKID bits must be 0)		

5.4.44.2. Output Operands

Table 5.178: TDH.MNG.ADDCX Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.44.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.44.3.1. Overview

TDH.MNG.ADDCX adds a TDCS physical page, which is a child of the specified TDR.

5.4.44.3.2. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for the new TDCX page. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.44.3.3. Control Structure Pages

Physical TDCS pages allocated by TDH.MNG.ADDCX can only be reclaimed as part of the TD's teardown sequence.

5.4.44.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.179: TDH.MNG.ADDCX Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ²⁹
Explicit	RCX	HPA	TDCX page	Blob	RW	Opaque	4KB	Exclusive	Shared	Shared	Exclusive
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Exclusive	Shared	Shared	None

5.4.44.5. Completion Status Codes**Table 5.180: TDH.MNG.ADDCX Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_RND_NO_ENTROPY	Failed to generate a random migration encryption key. This is typically caused by an entropy error of the CPU's random number generator, and may be impacted by RDSEED, RDRAND or PCONFIG executing on other LPs. The operation should be retried.
TDX_SUCCESS	TDH.MNG.ADDCX is successful
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCX_NUM_INCORRECT	

²⁹ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

5.4.45. TDH.MNG.CREATE Leaf

Create a new guest TD and its TDR root page.

5.4.45.1. Input Operands

Table 5.181: TDH.MNG.CREATE Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 9
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a page where TDR will be created (HKID bits must be 0)		
RDX	Bits	Name	Description
	15:0	HKID	The TD's ephemeral private HKID
	63:16	Reserved	Reserved: must be 0

5.4.45.2. Output Operands

Table 5.182: TDH.MNG.CREATE Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.45.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.45.3.1. Overview

TDH.MNG.CREATE starts the TD creation sequence. It creates a TDR page which is the root page of a new guest TD.

5.4.45.3.2. Dynamic PAMT

- If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for the new TDR page. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.45.3.3. Control Structure Pages

The physical TDR page allocated by TDH.MNG.CREATE can only be reclaimed as part of the TD's teardown sequence.

5.4.45.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.183: TDH.MNG.CREATE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ³⁰
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Exclusive	Shared	Shared	Exclusive
Implicit	N/A	N/A	KOT	KOT	N/A	Hidden	N/A	Exclusive	N/A	N/A	None

5.4.45.5. Completion Status Codes**Table 5.184: TDH.MNG.CREATE Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_HKID_NOT_FREE	
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_RND_NO_ENTROPY	Random TD_UUID generation (e.g., RDRAND or RDSEED) failed because the hardware random number generator did not have enough entropy. The host VMM should retry the operation.
TDX_SUCCESS	TDH.MNG.CREATE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	

³⁰ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

5.4.46. TDH.MNG.INIT Leaf

Initialize TD-scope control structures TDR and TDCS.

5.4.46.1. Input Operands**Table 5.185: TDH.MNG.INIT Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 21
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	TD handle and flags:		
	Bits	Name	Description
	0	EVENT_FILTERING	Flags that performance monitoring events are filtered based on the EVENT_FILTER array specified by R8. Enumeration: Support of this flag is enumerated by TDX_FEATURES0.EVENT_FILTERING (bit 24). If not supported, its value must be 0.
	11:1	Reserved	Reserved: must be 0
	51:12	TDR_HPA	Bits 51:12 of the host physical address of the parent TDR page (HKID bits must be 0)
	63:52	Reserved	Reserved: must be 0
RDX	The physical address (including HKID bits) of an input TD_PARAMS_STRUCT		
R8	If RCX.EVENT_FILTERING is 0 or the configured ATTRIBUTES.PERFMON is 0, then R8 is ignored. Else, R8 provides the following information:		
	Bits	Name	Description
	11:0	EVENT_FILTERS_NUM	The number of valid entries in the EVENT_FILTERS_ARRAY. Must be higher than 0 and lower or equal to MAX_EVENT_FILTERS, readable by TDH.SYS.RD*.
	51:12	EVENT_FILTERS_HPA	Bits 51:12 of the shared HPA (including HKID) of an array of EVENT_FILTER entries. The entry format and array restrictions are defined in 3.4.6.
	63:52	Reserved	Reserved: must be 0

5.4.46.2. Output Operands**Table 5.186: TDH.MNG.INIT Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1

Operand	Description		
RCX	Extended error information In case of a TD_PARAMS_STRUCT.CPUID_CONFIG error, RCX returns the applicable CPUID information as shown below. In all other cases, RCX returns 0.		
	Bits	Name	Description
	31:0	LEAF	CPUID leaf number
	63:32	SUBLEAF	CPUID sub-leaf number: if sub-leaf is not applicable, value is -1 (0xFFFFFFFF).
Other	Unmodified		

5.4.46.3. Leaf Function Latency

TDH.MNG.INIT execution time may be longer than most TDX Module interface functions execution time. No interrupts (including NMI and SMI) are processed by the logical processor during that time.

5 5.4.46.4. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.46.4.1. Overview

10 TDH.MNG.INIT initializes the TD-scope control structures TDR and TDCS based on a set of TD parameters provided as input.

5.4.46.4.2. Enumeration

Support of RCX.EVENT_FILTERING and the EVENT_FILTERS array is enumerated by TDX_FEATURES0.PERFMON_EVENT_FILTERING (bit 24), readable by TDH.SYS.RD*.

5.4.46.5. Operands Information

15 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.187: TDH.MNG.INIT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ³¹
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Exclusive	Shared	Shared	None
Explicit	RDX	HPA	TD Parameters	TD_PARAMS	R	Shared	1024B	None	N/A	N/A	None
Explicit	R8 ³²	HPA	EVENT_FILTERS	EVENT_FILTER array	RW	Shared	4KB	None	N/A	N/A	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A	None

³¹ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

³² Only if RCX.EVENT_FILTERING is set to 1

5.4.46.6. Completion Status Codes

Table 5.188: TDH.MNG.INIT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EVENT_FILTER_INVALID	
TDX_EVENT_FILTER_ORDER_INVALID	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MNG.INIT is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCX_NUM_INCORRECT	

5.4.47. TDH.MNG.KEY.CONFIG Leaf

Configure the TD ephemeral private key on a single package.

5.4.47.1. Input Operands

Table 5.189: TDH.MNG.KEY.CONFIG Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 8
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a TDR page (HKID bits must be 0)		

5.4.47.2. Output Operands

Table 5.190: TDH.MNG.KEY.CONFIG Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.47.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.47.3.1. Overview

TDH.MNG.KEY.CONFIG configures the TD's ephemeral private key on a single package.

5.4.47.3.2. Failure Conditions

TDH.MNG.KEY.CONFIG may fail due to the following conditions:

- A conflict with a concurrent TDH.MNG.KEY.CONFIG or a PCONFIG instruction running on the same package. In this case, a TDX_OPERAND_BUSY status is returned.
- Failure to generate a random key, typically caused by an entropy error of the CPU's random number generator, and may be impacted by RDSEED, RDRAND or PCONFIG executing on other LPs. In this case, a TDX_KEY_GENERATION_FAILED is returned.

5.4.47.3.3. Leaf Function Latency

TDH.MNG.KEY.CONFIG execution time may be longer than most TDX Module interface functions execution time. No interrupts (including NMI and SMI) are processed by the logical processor during that time.

5.4.47.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.191: TDH.MNG.KEY.CONFIG Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	KETs on current package	N/A	N/A	Hidden	N/A	Exclusive	N/A	N/A

5.4.47.5. Completion Status Codes**Table 5.192: TDH.MNG.KEY.CONFIG Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_KEY_CONFIGURED	
TDX_KEY_GENERATION_FAILED	Failed to generate a random key. This is typically caused by an entropy error of the CPU's random number generator, and may be impacted by RDSEED, RDRAND or PCONFIG executing on other LPs. The operation should be retried.
TDX_LIFECYCLE_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation. Specifically, key configuration may fail due to a concurrently running PCONFIG instruction.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MNG.KEY.CONFIG is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	

5.4.48. TDH.MNG.KEY.FREEID Leaf

End the platform cache flush sequence and mark applicable HKIDs in KOT as free.

5.4.48.1. Input Operands

Table 5.193: TDH.MNG.KEY.FREEID Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 20
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a TDR page (HKID bits must be 0)		

5.4.48.2. Output Operands

Table 5.194: TDH.MNG.KEY.FREEID Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.48.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MNG.KEY.FREEID ends the platform cache flush sequence for the HKIDs associated with the specified TD after TDH.PHYMEM.CACHE.WB has been executed (unless that function is not required, as enumerated by TDX_FEATURES0.SKIP_PHYMEM_CACHE_WB (bit 34)) on all the required WBINVD domains. It marks the TD's HKIDs in KOT as free, and the TD itself as being torn down.

5.4.48.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.195: TDH.MNG.KEY.FREEID Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	KOT	KOT	N/A	Hidden	N/A	Exclusive	N/A	N/A

5.4.48.5. Completion Status Codes

Table 5.196: TDH.MNG.KEY.FREEID Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_LIFECYCLE_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MNG.KEY.FREEID is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_WBCACHE_NOT_COMPLETE	

5.4.49. TDH.MNG.KEY.RECLAIMID Leaf (Deprecated)

This function is deprecated; it is provided for backward compatibility.

5.4.49.1. Input Operands**Table 5.197: TDH.MNG.KEY.RECLAIMID Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 27
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0

5.4.49.2. Output Operands**Table 5.198: TDH.MNG.KEY.RECLAIMID Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.49.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MNG.KEY.RECLAIMID is provided for backward compatibility. It does not do anything except returning a constant TDX_SUCCESS status.

5.4.49.4. Completion Status Codes**Table 5.199: TDH.MNG.KEY.RECLAIMID Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_SUCCESS	TDH.MNG.KEY.RECLAIMID is successful.

5.4.50. TDH.MNG.RD Leaf

Read a TD-scope metadata field (control structure field) of a TD.

5.4.50.1. Input Operands

Table 5.200: TDH.MNG.RD Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 11
	23:16	Version Number	Selects the SEAMCALL interface function version Version number may be 0 or 1. See the enumeration details below.
	63:24	Reserved	Must be 0
RCX	The physical address of a TDR page (HKID bits must be 0)		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. For TDH.MNG.RD version 1 or higher, a value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		

5.4.50.2. Output Operands

Table 5.201: TDH.MNG.RD Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RDX	For TDH.MNG.RD version 0, RDX is unmodified. For TDH.MNG.RD version 1 or higher: If the input field identifier was -1, RDX returns the first readable field identifier. Else, in case of an error, RDX returns -1. On success, RDX returns the next readable field identifier. A value of -1 indicates no next field identifier is available.
R8	Contents of the field In case of no success, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.4.50.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.50.3.1. Overview

TDH.MNG.RD reads a TD-scope metadata field (control structure field) of a TD.

If version 1 or higher is specified in RAX, RDX returns the next host-side readable field identifier. This may be used by the host VMM to dump the host readable TD metadata. To read all the available fields, the host VMM can invoke TDH.MNG.RD in a loop, starting with field identifier -1 as an input, until RDX returns -1. A status code of TDX_METADATA_FIELD_SKIP indicates that the returned value is not applicable.

5 5.4.50.3.2. Enumeration

Availability of TDH.MNG.RD version 1 is enumerated by TDX_FEATURES0.ENHANCED_METADATA (bit 3), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.MNG.RD with a version number higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

5.4.50.4. Operands Information

- 10 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.202: TDH.MNG.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A

5.4.50.5. Completion Status Codes

15 **Table 5.203: TDH.MNG.RD Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_METADATA_FIRST_FIELD_ID_IN_CONTEXT	Indicates that the first field ID in context is returned
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MNG.RD is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	

Completion Status Code	Description
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.51. TDH.MNG.VPFLUSHDONE Leaf

Start the TD teardown sequence by checking that none of the TD's VCPUs are associated with an LP.

5.4.51.1. Input Operands

Table 5.204: TDH.MNG.VPFLUSHDONE Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 19
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a TDR page (HKID bits must be 0)		

5.4.51.2. Output Operands

Table 5.205: TDH.MNG.VPFLUSHDONE Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.51.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MNG.VPFLUSHDONE starts that TD teardown sequence. It checks that none of the TD's VCPUs are associated with an LP, and it then prepares for cache flushing by TDH.PHYMEM.CACHE.WB.

For details, see the [Base Spec] chapter on TD Lifecycle Management.

5.4.51.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.206: TDH.MNG.VPFLUSHDONE Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	KOT	KOT	N/A	Hidden	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	None	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.51.5. Completion Status Codes**Table 5.207: TDH.MNG.VPFLUSHDONE Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_FLUSHVP_NOT_DONE	
TDX_IOMMU_IOTLB_TRACKING_NOT_DONE	Applicable only if the TDX Module supports TDX Connect.
TDX_LIFECYCLE_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MNG.VPFLUSHDONE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_HAS_ATTACHED_DEVICES	Applicable only if the TDX Module supports TDX Connect.

5.4.52. TDH.MNG.WR Leaf

Write a TD-scope metadata field (control structure field) of a TD.

5.4.52.1. Input Operands

Table 5.208: TDH.MNG.WR Input Operands Definitions

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 13
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a TDR page (HKID bits must be 0)		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored.		
R8	Data to write to the field		
R9	A 64b write mask to indicate which bits of the value in R8 are to be written to the field		

5.4.52.2. Output Operands

Table 5.209: TDH.MNG.WR Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
R8	Previous content of the field In case of an error, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.4.52.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.MNG.WR writes a TD-scope metadata field (control structure field) of a TD. The value (R8) is written as specified by the write mask (R9). Writing is subject to the field's internal write mask (per the TD's ATTRIBUTES.DEBUG bit). Writing of specific fields is also subject to additional rules.

Table 5.210: Metadata Field Write Rules

Write Mask Bit in R9	Internal Write Mask Bit	Value Bit in R8
0	N/A	Silently ignored

Write Mask Bit in R9	Internal Write Mask Bit	Value Bit in R8
1	0	Must be the same as the current field's bit
1	1	Written to the current field's bit

If the TD is both debuggable (ATTRIBUTES.DEBUG is 1) and migratable (ATTRIBUTES.MIGRATABLE is 1), TDH.MNG.WR behaves as if the TD is not debuggable.

5.4.52.4. Operands Information

- 5 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.211: TDH.MNG.WR Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A

5.4.52.5. Completion Status Codes

Table 5.212: TDH.MNG.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_NOT_WRITABLE	
TDX_METADATA_FIELD_VALUE_NOT_VALID	
TDX_METADATA_WR_MASK_NOT_VALID	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MNG.WR is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	

Completion Status Code	Description
TDX_TD_NON_DEBUG	
TDX_TDCS_NOT_ALLOCATED	

5.4.53. TDH.MR.EXTEND Leaf

Extend the MRTD measurement register in the TDCS with the measurement of the indicated chunk of a TD page.

5.4.53.1. Input Operands

Table 5.213: TDH.MR.EXTEND Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 16
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The GPA of the TD page chunk to be measured		
RDX	The physical address of the TDR page of the target TD (HKID bits must be 0)		

5.4.53.2. Output Operands

Table 5.214: TDH.MR.EXTEND Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	Extended error information part 1 In case of EPT walk error, Secure EPT entry where the error was detected In other cases, RCX returns 0.
RDX	Extended error information part 2 In case of EPT walk error, EPT level where the error was detected In other cases, RDX returns 0.
Other	Unmodified

5.4.53.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.53.3.1. Overview

TDH.MR.EXTEND updates the MRTD measurement register in TDCS with the measurement of the indicated 256 bytes chunk of a TD private page. For pages whose contents need to be measured, once the page is copied into the TD memory area by TDH.MEM.PAGE.ADD, the host VMM needs to call TDH.MR.EXTEND multiple times to measure the pages contents into MRTD. TDEXEND can be executed only before TDH.MR.FINALIZE.

Note: TDH.MR.EXTEND works on a 256B chunk of a page, not on a full page, due to instruction latency considerations.

5.4.53.3.2. TD Measurement Register (MRTD) Extension

TDH.MR.EXTEND extends the TD's MRTD with the chunk's GPA and contents. Extension is done using SHA384, with three 128B extension buffers.

The first extension buffer is composed as follows:

- Bytes 0 through 8 contain the ASCII string "MR.EXTEND".
- Bytes 16 through 23 contain the GPA (in little-endian format).
- All the other bytes contain 0.

The other two extension buffers contain the chunk's contents.

5.4.53.3.3. MRTD Extension Compatibility Aspects

- If MRTD was initialized by TDH.MNG.INIT, and later the TDX Module was updated before the current TDH.MR.EXTEND was called, there could be incompatibility issues with the intermediate MRTD context format between the original and the new TD module. On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.MR.EXTEND returns a TDX_INCOMPATIBLE_MRTD_CONTEXT status. In this case, the host VMM is expected to tear down the TD and rebuild it. For details, see the [Base Spec] section titled "Compatibility Aspects of TD-Preserving Update".

5.4.53.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.215: TDH.MR.EXTEND Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	GPA	TD private page chunk	Blob	R	Private	256B	None	None	None
Explicit	RDX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	4KB	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	GPA	Secure EPT tree	N/A	R	Private	N/A	Exclusive(i)	N/A	N/A
Implicit	N/A	GPA	Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(i)	N/A	N/A

5.4.53.5. Completion Status Codes

Table 5.216: TDH.MR.EXTEND Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_NOT_PRESENT	
TDX_EPT_WALK_FAILED	
TDX_INCOMPATIBLE_MRTD_CONTEXT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	

Completion Status Code	Description
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MR.EXTEND is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.54. TDH.MR.FINALIZE Leaf

TDH.MR.FINALIZE completes measurement of the initial TD contents and marks the TD as ready to run.

5.4.54.1. Input Operands

Table 5.217: TDH.MR.FINALIZE Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 17
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of the parent TDR page (HKID bits must be 0)		

5.4.54.2. Output Operands

Table 5.218: TDH.MR.FINALIZE Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.54.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.54.3.1. Overview

TDH.MR.FINALIZE does the following:

- Completes the measurement of the initial TD contents (MRTD).
- Calculates SERVTD_HASH for bound or pre-bound Service TDs.
- Marks the TD as finalized so it can be executed.

5.4.54.3.2. MRTD Finalization Compatibility Aspects

If MRTD was initialized by TDH.MNG.INIT, and later the TDX Module was updated before the current TDH.MR.FINALIZE was called, there could be incompatibility issues with the intermediate MRTD context format between the original and the new TD module. On TDH.SYS.UPDATE, the host VMM can configure the TDX Module to detect such incompatibility. If detected, TDH.MR.FINALIZE returns a TDX_INCOMPATIBLE_MRTD_CONTEXT status. In this case, the host VMM is expected to tear down the TD and rebuild it. For details, see the [Base Spec] section titled “Compatibility Aspects of TD-Preserving Update”.

5.4.54.3.3. SERVTD_HASH Calculation

TDH.MR.FINALIZE calculates the TD’s SERVTD_HASH as follows:

1. Get all service TD binding slots whose SERVTD_BINDING_STATE is not NOT_BOUND.
 - 1.1. If no service TD binding slots apply, SERVTD_HASH value is 0.

2. Sort in ascending order by SERVTD_TYPE as the primary key, SERVTD_INFO_HASH as a secondary key (if multiple service TDs of the same type are bound).
3. Concatenate SERVTD_INFO_HASH, SERVTD_TYPE and SERVTD_ATTR of each slot in a temporary buffer:
 - 3.1. SERVTD_INFO_HASH in bytes 47:0
 - 3.2. SERVTD_TYPE in bytes 49:48
 - 3.3. SERVTD_ATTR in bytes 57:50
4. Concatenate all temporary buffers.
5. Calculate SHA384 over the concatenated buffers.

5.4.54.4. Operands Information

- 10 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.219: TDH.MR.FINALIZE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	4KB	Exclusive(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)	N/A	N/A

5.4.54.5. Completion Status Codes

Table 5.220: TDH.MR.FINALIZE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCOMPATIBLE_MRTD_CONTEXT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.MR.FINALIZE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.55. TDH.PHYMEM.CACHE.WB Leaf

TDH.PHYMEM.CACHE.WB is an interruptible and resumable function to write back the cache hierarchy on a package or a core.

If the value of TDX_FEATURES0.SKIP_PHYMEM_CACHE_WB (bit 34), readable by TDH.SYS.RD*, is 1, TDH.PHYMEM.CACHE.WB is provided for backward compatibility. It returns immediately, indicating success.

5.4.55.1. Input Operands

Table 5.221: TDH.PHYMEM.CACHE.WB Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 40
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Command, as described below:		
	Value	Name	Description
	0	WB_START_CMD	Start a new TDH.PHYMEM.CACHE.WB cycle with no cache invalidation.
	1	WB_RESUME_CMD	Resume a previously interrupted TDH.PHYMEM.CACHE.WB cycle with no cache invalidation.
	Other		Reserved

5.4.55.2. Output Operands

Table 5.222: TDH.PHYMEM.CACHE.WB Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.55.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.55.3.1. Overview

TDH.PHYMEM.CACHE.WB writes back the cache hierarchy to memory and updates the KOT state to allow reuse of HKIDs.

5.4.55.3.2. Enumeration

If the value of TDX_FEATURES0.SKIP_PHYMEM_CACHE_WB (bit 34), readable by TDH.SYS.RD*, is 1, TDH.PHYMEM.CACHE.WB is provided for backward compatibility. It does nothing and returns immediately with TDX_SUCCESS.

5.4.55.3.3. Interruptibility

TDH.PHYMEM.CACHE.WB is interruptible. If a pending interrupt is detected during operation, TDH.PHYMEM.CACHE.WB returns with a TDX_INTERRUPTED_RESUMABLE status in RAX.

The host VMM initially calls TDH.PHYMEM.CACHE.WB with RCX indicating WB_START_CMD. If TDH.PHYMEM.CACHE.WB returns TDX_INTERRUPTED_RESUMABLE (or any other recoverable error) status in RAX, the host VMM should call TDH.PHYMEM.CACHE.WB with RCX indicating WB_RESUME_CMD in a loop until it completes its operation, as indicated by TDX_SUCCESS status.

5.4.55.3.4. Host VMM Should Always Resume an Interrupted TDH.PHYMEM.CACHE.WB

When TDH.PHYMEM.CACHE.WB is interrupted, the CPU still considers this as a cache write-back operation in progress. The host VMM should complete the cache write-back operation by resuming TDH.PHYMEM.CACHE.WB (i.e., with RCX indicating WB_RESUME_CMD) until completed successfully. **Failure to do so will result in memory performance impact that would only be resolved by a restart.** The host VMM should also refrain from executing WBINVD or WBNOINVD while the TDH.PHYMEM.CACHE.WB cycle is in progress.

5.4.55.3.5. Other TDH.PHYMEM.CACHE.WB Characteristics

- TDH.PHYMEM.CACHE.WB does not invalidate cache lines.
- The function operates on cache lines associated with any HKID.
- The function is designed to ensure write back of at least those cache lines where the state of that HKID (in the KOT) was HKID_FLUSHED at the time of the first invocation (RCX == WB_START_CMD).
- Depending on the implementation, the instruction may write back additional cache lines.
- The scope at which TDH.PHYMEM.CACHE.WB operates (e.g., package or core) is determined at Intel TDX Module initialization time.

5.4.55.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.223: TDH.PHYMEM.CACHE.WB (Implicit) Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	KOT	KOT	N/A	Hidden	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	WBT entry for current scope	WBT_ENTRY	N/A	Hidden	N/A	Exclusive	N/A	N/A

5.4.55.5. Completion Status Codes

Table 5.224: TDH.PHYMEM.CACHE.WB Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INTERRUPTED_RESUMABLE	TDH.PHYMEM.CACHE.WB was interrupted; it is recommended to resume it with RCX indicating WB_RESUME_CMD
TDX_NO_HKID_READY_TO_WBCACHE	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	

Completion Status Code	Description
TDX_SUCCESS	TDH.PHYMEM.CACHE.WB is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	

5.4.56. TDH.PHYMEM.PAGE.RDMD Leaf

Read the metadata of a page, of containing large page or of an HPA range in TDMR.

5.4.56.1. Input Operands**Table 5.225: TDH.PHYMEM.PAGE.RDMD Operands**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 24
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0.
	63:24	Reserved	Must be 0
RCX	HPA range mapping information:		
	Bits	Name	Description
	2:0	MIN_SIZE	Minimum size of the page 0: 4KB 1: 2MB 2: 1GB MIN_SIZE values other than 4KB are only allowed if the TDX Module is configured for dynamic PAMT. They allow the caller to read the metadata stored by non-leaf PAMT entries.
	11:3	Reserved	Reserved: must be 0
	51:12	HPA	Bits 51:12 of a physical address of a range in TDMR (HKID bits must be 0). Depending on the requested MIN_SIZE, the following bits must be 0: 0 (4KB): None 1 (2MB): Bits 20:12 2 (1GB): Bits 29:12
	63:52	Reserved	Reserved: must be 0

5.4.56.2. Output Operands**Table 5.226: TDH.PHYMEM.PAGE.RDMD Output Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction return code – see 5.4.1		
RCX	Bits	Name	Description

Operand	Description		
	3:0	PT	Page Type – see 3.5.1 If the TDX Module supports Dynamic PAMT, PT_PAMT is returned in two cases: - If NON_LEAF (see below) is 0, it means that the specified HPA is of a PAMT page. In this case, then the ACTUAL_SIZE returned in R8 is 0 (4KB). - If NON_LEAF (see below) is 1, it means that the specified HPA is of a non-leaf PAMT entry. In this case, then the ACTUAL_SIZE returned in R8 is 1 (2MB). Note that this only happens if the specified MIN_SIZE was also 1 (2MB). In case of an error, PT returns 0.
	62:4	Reserved	Set to 0
	63	NON_LEAF	If the TDX Module is configured for dynamic PAMT, NON_LEAF Indicates that the applicable PAMT entry is a non-leaf entry. Else, NON_LEAF returns 0. In case of an error, NON_LEAF returns 0.
RDX	For PT values associated with a specific TD, RDX returns the HPA of the TD's TDR control structure page, if applicable (HKID bits are set to 0). If the TDX Module supports TDX Connect, then for a PT value of PT_IOMMU_MT, this field returns the IOMMU_ID. See the [TDX Connect ABI]. If the TDX Module supports Dynamic PAMT, then if RCX.PT returns PT_PAMT, RDX returns 0. In multiple error cases, as indicated by RAX, RDX returns 0. In other error cases, RDX still returns the OWNER information. See the completion status codes table below for details.		
R8	Bits	Name	Description
	2:0	ACTUAL_SIZE	In case of an error, as indicated by RAX, this field returns 0. If the requested MIN_SIZE was 0 (4KB), this field returns the actual size of the containing 4KB, 2MB or 1GB page, depending on the page mapping. If the requested MIN_SIZE was 1 (2MB), this field returns the actual size of the containing 2MB or 1GB page, depending on the page mapping. If the requested MIN_SIZE was 2 (1GB), this field returns 2 (1GB).
	63:3	Reserved	Set to 0
R9	For a PT value of PT_REG, PT_EPT or PT_IOMMU_MT, R9 returns BEPOCH. If the TDX Module is configured for dynamic PAMT, RCX.NON_LEAF is 1, indicating a non-leaf PAMT entry, R9 returns the number of entries in the child PAMT pages which are neither free nor reserved. In other cases, R9 returns 0.		
R10	If the TDX Module is configured for dynamic PAMT, RCX.NON_LEAF is 1, indicating a non-leaf PAMT entry, R10 returns the HPA of the first PAMT page pointed by this entry. HKID bits are set to 0. Else, R10 returns 0.		
R11	If the TDX Module is configured for dynamic PAMT, RCX.NON_LEAF is 1, indicating a non-leaf PAMT entry, R11 returns the HPA of the second PAMT page pointed by this entry. HKID bits are set to 0. Else, R11 returns 0.		

Operand	Description
Other	Unmodified

5.4.56.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.56.3.1. Overview

TDH.PHYMEM.PAGE.RDMD finds the containing page or HPA range (4KB, 2MB or 1GB) of the given page in TDMR and reads its metadata from its PAMT entry.

5.4.56.3.2. Enumeration

Support of requested HPA range sizes other than 0 (4KB) is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36), readable by the host VMM using TDH.SYS.RD*.

5.4.56.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.227: TDH.PHYMEM.PAGE.RDMD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target page	Blob	None	Opaque/ Private	4KB	Shared	Shared	Shared

5.4.56.5. Completion Status Codes

Table 5.228: TDH.PHYMEM.PAGE.RDMD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDH.PHYMEM.PAGE.RDMD is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	

5.4.57. TDH.PHYMEM.PAGE.RECLAIM Leaf

Reclaim a physical 4KB, 2MB or 1GB TD-owned page (i.e., TD private page, Secure EPT page or a control structure page) from a TD, given its HPA.

5.4.57.1. Input Operands

5

Table 5.229: TDH.PHYMEM.PAGE.RECLAIM Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 28
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0 or 1, see enumeration details below.
		63:24	Reserved	Must be 0
RCX	PAGE	The physical address of a 4KB, 2MB or 1GB page to be reclaimed (HKID bits must be 0)		

5.4.57.2. Output Operands**Table 5.230: TDH.PHYMEM.PAGE.RECLAIM Output Operands Definition**

Operand	Name	Description		
RAX	STATUS	SEAMCALL instruction return code – see 5.4.1		
RCX	PT	Page Type (PT) – see 3.5.1 In multiple error cases, as indicated by RAX, RCX returns 0. In other error cases, RCX still returns the PT information. See the completion status codes table below for details.		
RDX	OWNER	For most PT values, this field returns the HPA of the TD's TDR control structure page, if applicable (HKID bits are set to 0). For PT value of PT_IOMMU_MT (applicable only if the TDX Module supports TDX Connect), this field returns the IOMMU_ID. See the [TDX Connect ABI]. In multiple error cases, as indicated by RAX, RDX returns 0. In other error cases, RDX still returns the OWNER information. See the completion status codes table below for details.		
R8	SIZE	Bits	Name	Description
		2:0	Size	Size of the containing 4KB, 2MB or 1GB page
		63:3	Reserved	Set to 0
		In multiple error cases, as indicated by RAX, RDX returns 0. In other error cases, RDX still returns the size information. See the completion status codes table below for details.		
R9	FLAGS	Bits	Name	Description
		61:0	Reserved	Set to 0

Operand	Name	Description		
		62	PAMT_REMOVAL_HINT	If the TDX Module has been configured for Dynamic PAMT, this bit indicates that all entries in the PAMT page pair mapping the removed page are free. This only applies to 4KB pages. Else, this bit is set to 0
		63	Reserved	Set to 0
R10	RESERVED	Reserved: set to 0		
R11	RESERVED	Reserved: set to 0		
Other		Unmodified		

5.4.57.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.57.3.1. Overview

TDH.PHYMEM.PAGE.RECLAIM reclaims a TD-owned physical page from the TD.

5.4.57.3.2. Enumeration

Support of TDH.PHYMEM.PAGE.RECLAIM version 1 is enumerated by TDX_FEATURES0.ACT (bit 14), readable by the host VMM using TDH.SYS.RD*.

- 10 Support for reclaiming PT_TR pages is enumerated by TDX_FEATURES0.NON_BLOCKING_RESIZE (bit 35).

5.4.57.3.3. Owner TD Lifecycle State

Normally, TDH.PHYMEM.PAGE.RECLAIM can reclaim pages only if the owner TD is in the TD_TEARDOWN state. The only exception are PT_TR pages (see below).

5.4.57.3.4. Reclaiming PT_TR Pages

- 15 If supported, PT_TR pages are created by TDH.MEM.PAGE.PROMOTE if the NO_TRACK option is selected (see 5.4.26).
Normally, TDH.PHYMEM.PAGE.RECLAIM can reclaim pages only if the owner TD is in the TD_TEARDOWN state. However, if reclaiming PT_TR pages is supported, a PT_TR page may be reclaimed while the TD is in its normal operating state (TD_KEYS_CONFIGURED). In that case, if the TD may be running, the function checks the TLB tracking of the reclaimed PT_TR page.

5.4.57.3.5. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT and the removed page size is 4KB, R9[62] is returned as a hint indicating that all entries in the PAMT page pair mapping the removed physical page are free, and they can be removed using TDH.PHYMEM.PAMT.REMOVE.

5.4.57.3.6. Reclaimed Page Initialization

- 25 After the page has been reclaimed, the host VMM should initialize its content before it is reused as a non-private page, as described in the [Base Spec].

5.4.57.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.231: TDH.PHYMEM.PAGE.RECLAIM Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ³³
Explicit	RCX	HPA	Target page	Blob	RW	Opaque/ Private	4KB, 2MB or 1GB	Exclusive	Shared	Shared	Exclusive
Implicit	N/A	N/A	TDR page ³⁴	TDR	RW	Opaque	4KB	Shared	N/A	N/A	None
Implicit	N/A	N/A	TDCS structure ³⁵	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE ³⁵	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	None

5.4.57.5. Completion Status Codes**Table 5.232: TDH.PHYMEM.PAGE.RECLAIM Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_IOMMU_MT_PAGE_IN_USE	Applies only if the TDX Module supports TDX Connect
TDX_LIFECYCLE_STATE_INCORRECT	RCX, RDX and R8 return the actual PT, OWNER and SIZE information.
TDX_OP_STATE_INCORRECT	Attempted reclaim of PT_TR while the TD's OP_STATE doesn't allow it
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation. If the page is not a TDR page but the owner TDR is busy, then RCX, RDX and R8 return the actual PT, OWNER and SIZE information.
TDX_OPERAND_INVALID	If the page physical address is not aligned on its size, then RCX, RDX and R8 return the actual PT, OWNER and SIZE information.
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.PHYMEM.PAGE.RECLAIM is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_ASSOCIATED_PAGES_EXIST	RCX, RDX and R8 return the actual PT, OWNER and SIZE information.
TDX_TD_FATAL	Attempted reclaim of a PT_TR page while the TD is in a FATAL state but not in TD_TEARDOWN state

³³ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.³⁴ Except when TDR is the target page³⁵ Only if the TDX Module supports NON_BLOCKING_RESIZE, and TDR.LIFECYCLE_STATE is TD_KEYS_CONFIGURED

Completion Status Code	Description
TDX_TDCS_NOT_ALLOCATED	
TDX_TLB_TRACKING_NOT_DONE	Applicable only if reclaiming PT_TR pages, enumerated by TDX_FEATURES0.NON_BLOCKING_RESIZE (bit 35), is supported.

5.4.58. TDH.PHYMEM.PAGE.WBINVD Leaf

Write back and invalidate all cache lines associated with the specified non-TDX 4KB memory page and HKID.

5.4.58.1. Input Operands**Table 5.233: TDH.PHYMEM.PAGE.WBINVD Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 41
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Physical address (including HKID bits) of a 4KB page in TDMR which is not allocated to TDX		

5.4.58.2. Output Operands**Table 5.234: TDH.PHYMEM.PAGE.WBINVD Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.58.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.PHYMEM.PAGE.WBINVD performs cache write back and invalidation on all the cache lines associated with the specified page and HKID. The page must not be in use by the Intel TDX Module (i.e., not assigned to a TD as a private page or a Secure EPT page), nor used as a control structure page.

- It is the responsibility of the host VMM to track which HKID is associated with the target page; the function does not check it.

5.4.58.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.235: TDH.PHYMEM.PAGE.WBINVD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target page	Blob	R	Private/ Opaque	4KB	Shared	Shared	Shared

5.4.58.5. Completion Status Codes

Table 5.236: TDH.PHYMEM.PAGE.WBINVD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.PHYMEM.PAGE.WBINVD is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	

5.4.59. TDH.PHYMEM.PAMT.ADD Leaf

Add a pair of physical 4KB PAMT pages which map a given HPA range.

5.4.59.1. Input Operands**Table 5.237: TDH.PHYMEM.PAMT.ADD Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 58
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0.
	63:24	Reserved	Must be 0
RCX	HPA range mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the non-leaf PAMT entry mapping the PAMT page pair to be added Must be 1 (2MB).
	11:3	Reserved	Reserved: must be 0
	51:12	HPA	Bits 51:12 of the HPA range for which the PAMT page pair is to be added (HKID bits must be 0) Bits 20:12 must be 0.
	63:52	Reserved	Reserved: must be 0
RDX	The physical address of the first new PAMT page to be added (HKID bits must be 0)		
R8	The physical address of the second new PAMT page to be added (HKID bits must be 0)		

5.4.59.2. Output Operands**Table 5.238: TDH.PHYMEM.PAMT.ADD Output Operands Definition**

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code
Other		Unmodified

5.4.59.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.59.3.1. Overview

TDH.PHYMEM.PAMT.ADD adds a pair of PAMT pages that map an HPA range at the specified level.

5.4.59.3.2. Enumeration

Support of TDH.PHYMEM.PAMT.ADD is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36), readable by the host VMM using TDH.SYS.RD*.

5.4.59.4. Operands Information

- 5 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.239: TDH.PHYMEM.PAMT.ADD Operands Information Definition

Explicit/ Implicit	Reg.	Ref. Type	Resource	Resource Type	Access	Access Semantics	Align. Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ³⁶
Explicit	RCX	HPA	2MB HPA range to map	N/A	RW	Opaque	2MB	Exclusive ³⁷	N/A	Shared	None
Explicit	R8, RDX	HPA	New PAMT pages	PAMT_PAGE	RW	Opaque	4KB	Shared	Shared	Shared	Exclusive

5.4.59.5. Completion Status Codes

10

Table 5.240: TDH.PHYMEM.PAMT.ADD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_HPA_RANGE_NOT_FREE	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_PAGE_METADATA_INCORRECT	
TDX_PAGE_NOT_FREE	
TDX_SUCCESS	

³⁶ ACT is implemented only on client platforms. This is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

³⁷ Concurrency is enforced by locking the parent non-leaf PAMT entry in the PAMT tree, which points to the new PAMT pages.

5.4.60. TDH.PHYMEM.PAMT.REMOVE Leaf

Remove a pair of physical 4KB PAMT pages which map a given HPA range.

5.4.60.1. Input Operands**Table 5.241: TDH.PHYMEM.PAMT.REMOVE Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 59
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0.
	63:24	Reserved	Must be 0
RCX	HPA range mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the non-leaf PAMT entry mapping the PAMT page pair to be removed Must be 1 (2MB).
	11:3	Reserved	Reserved: must be 0
	51:12	HPA	Bits 51:12 of the HPA range for which the PAMT page pair is to be removed (HKID bits must be 0) Bits 20:12 must be 0.
	63:52	Reserved	Reserved: must be 0

5.4.60.2. Output Operands**Table 5.242: TDH.PHYMEM.PAMT.REMOVE Output Operands Definition**

Operand	Name	Description
RAX	STATUS	SEAMCALL instruction return code
RDX	REMOVED_HPA0	If TDH.PHYMEM.PAMT.REMOVE completed successfully, RDX returns the HPA (HKID bits are 0) of the first removed 4KB PAMT page. Else, RDX is unmodified.
R8	REMOVED_HPA1	If TDH.PHYMEM.PAMT.REMOVE completed successfully, R8 returns the HPA (HKID bits are 0) of the second removed 4KB PAMT page. Else, R8 is unmodified.
Other		Unmodified

5.4.60.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.60.3.1. Overview

TDH.PHYMEM.PAMT.REMOVE first checks that all 512 entries in the PAMT page pair to be removed are free (PT_NDA). It then removes the PAMT page pair and marks its parent PAMT entry as PAMT_NDA.

5.4.60.3.2. Enumeration

- 5 Support of TDH.PHYMEM.PAMT.REMOVE is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36), readable by the host VMM using TDH.SYS.RD*.

5.4.60.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

10

Table 5.243: TDH.PHYMEM.PAMT.REMOVE Operands Information Definition

Explicit/ Implicit	Reg.	Ref. Type	Resource	Resource Type	Access	Access Semantics	Align. Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ³⁸
Explicit	RCX	HPA	HPA range	N/A	RW	Opaque	2MB	Exclusive ³⁹	N/A	Shared	None
Implicit	N/A	HPA	Removed PAMT pages	PAMT_PAGE	RW	Opaque	None	Exclusive(i)	None	None	Exclusive

5.4.60.5. Completion Status Codes

Table 5.244: TDH.PHYMEM.PAMT.REMOVE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_NO_PAMT_PAGE_PAIR	
TDX_OPERAND_ADD_RANGE_ERROR	
TDX_OPERAND_BUSY	
TDX_OPERAND_INVALID	
TDX_PAMT_PAGE_NOT_EMPTY	
TDX_SUCCESS	

³⁸ ACT is implemented only on client platforms. This is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

³⁹ Concurrency is enforced by locking the parent non-leaf PAMT entry in the PAMT tree, which points to the new PAMT pages.

5.4.61. TDH.SERVTD.BIND Leaf

Bind a service TD to a target TD.

5.4.61.1. Input Operands

Table 5.245: TDH.SERVTD.BIND Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 48
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of the target TD's TDR page (HKID bits must be 0)		
RDX	The physical address of the service TD's TDR page (HKID bits must be 0)		
R8	Index (slot number) in the target TD's service TD binding table		
R9	SERVTD_TYPE: Service TD type		
R10	SERVTD_ATTR: Service TD attributes		

5.4.61.2. Output Operands

Table 5.246: TDH.SERVTD.BIND Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	Binding handle In case of an error, as indicated by RAX, RCX returns 0.
R10	TD_UUID bits 63:0 In case of an error, as indicated by RAX, R10 returns 0.
R11	TD_UUID bits 127:64 In case of an error, as indicated by RAX, R11 returns 0.
R12	TD_UUID bits 191:128 In case of an error, as indicated by RAX, R12 returns 0.
R13	TD_UUID bits 255:192 In case of an error, as indicated by RAX, R13 returns 0.
AVX, AVX2 and AVX512 state	May be reset to the architectural RESET state
Other	Unmodified

5.4.61.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5 5.4.61.3.1. Overview

TDH.SERVTD.BIND binds a service TD to a target TD.

5.4.61.3.2. Enumeration

Availability of TDH.SERVTD.BIND is enumerated by TDX_FEATURES0.SERVICE_TD (bit 2), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SERVTD.BIND returns a TDX_OPERAND_INVALID(RAX) status.

10 5.4.61.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.247: TDH.SERVTD.BIND Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target TD's TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	RDX	HPA	Service TD's TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	Target TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	Target TD's TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Binding table		RW	Opaque	N/A	Exclusive	None	None
Implicit	N/A	N/A	Service TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	Service TD's TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Service TD's TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Shared	N/A	N/A

15 5.4.61.5. Completion Status Codes

Table 5.248: TDH.SERVTD.BIND Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SERVTD_ATTR_MISMATCH	
TDX_SERVTD_INFO_HASH_MISMATCH	
TDX_SERVTD_TYPE_MISMATCH	
TDX_SERVTD_UUID_MISMATCH	
TDX_SUCCESS	TDH.SERVTD.BIND is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.62. TDH.SERVTD.REBIND Leaf

Rebind a new service TD to a target TD.

5.4.62.1. Input Operands**Table 5.249: TDH.SERVTD.REBIND Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 97
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of the target TD's TDR page (HKID bits must be 0)		
RDX	The physical address of the service TD's TDR page (HKID bits must be 0)		
R8	Index (slot number) in the target TD's service TD binding table		
R9	SERVTD_TYPE: Service TD type		
R10	SERVTD_ATTR: Service TD attributes		

5.4.62.2. Output Operands**Table 5.250: TDH.SERVTD.REBIND Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RCX	Binding handle In case of an error, as indicated by RAX, RCX returns 0.
R10	TD_UUID bits 63:0 In case of an error, as indicated by RAX, R10 returns 0.
R11	TD_UUID bits 127:64 In case of an error, as indicated by RAX, R11 returns 0.
R12	TD_UUID bits 191:128 In case of an error, as indicated by RAX, R12 returns 0.
R13	TD_UUID bits 255:192 In case of an error, as indicated by RAX, R13 returns 0.
AVX, AVX2 and AVX512 state	May be reset to the architectural RESET state
Other	Unmodified

5.4.62.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.62.3.1. Overview

- 5 TDH.SERVTD.REBIND binds a new service TD to a target TD. Current bound service TD must approve the transition to the new service TD by calling the TDG.SERVTD.REBIND.APPROVE API prior to this call.

5.4.62.3.2. Enumeration

Availability of TDH.SERVTD.REBIND is enumerated by TDX_FEATURES0.SERVTD_REBIND (bit 48), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SERVTD.REBIND returns a TDX_OPERAND_INVALID(RAX) status.

10 5.4.62.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.251: TDH.SERVTD.REBIND Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target TD's TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	RDX	HPA	Service TD's TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	N/A	Target TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	Target TD's TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Binding table		RW	Opaque	N/A	Exclusive	None	None
Implicit	N/A	N/A	Service TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	Service TD's TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Service TD's TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Shared	N/A	N/A

15 5.4.62.5. Completion Status Codes

Table 5.252: TDH.SERVTD.REBIND Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	

Completion Status Code	Description
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_REBIND_TOKEN_MISMATCH	Rebind session tokens did not match
TDX_SERVTD_ATTR_MISMATCH	
TDX_SERVTD_EXT_MISMATCH	Rebind SERVTD_EXT hash did not match
TDX_SERVTD_INCORRECT_BINDING_STATE	Target TD binding state is not in the expected state
TDX_SERVTD_INFO_HASH_MISMATCH	
TDX_SERVTD_TYPE_MISMATCH	
TDX_SERVTD_UUID_MISMATCH	
TDX_SUCCESS	TDH.SERVTD.REBIND is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.63. TDH.SERVTD.PREBIND Leaf

Pre-bind a service TD to a target TD.

5.4.63.1. Input Operands

Table 5.253: TDH.SERVTD.PREBIND Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 49
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of the target TD's TDR page (HKID bits must be 0)		
RDX	The physical address (including HKID bits) of SERVTD_INFO_HASH, the expected SHA384 hash of the service TD's TDINFO_STRUCT		
R8	Index (slot number) in the target TD's service TD binding table		
R9	SERVTD_TYPE: Expected service TD type		
R10	SERVTD_ATTR: Expected service TD attributes		

5.4.63.2. Output Operands

Table 5.254: TDH.SERVTD.PREBIND Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.63.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.63.3.1. Overview

TDH.SERVTD.PREBIND pre-binds a service TD to a target TD, by setting its expected binding parameters.

5.4.63.3.2. Enumeration

- Availability of TDH.SERVTD.PREBIND is enumerated by TDX_FEATURES0.SERVICE_TD (bit 2), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SERVTD.PREBIND returns a TDX_OPERAND_INVALID(RAX) status.

5.4.63.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.255: TDH.SERVTD.PREBIND Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target TD's TDR page	TDR	R	Opaque	4KB	Shared	Shared	Shared
Explicit	RDX	HPA	SERVTD_INFO_HASH	SHA384_HASH	R	Shared	64B	N/A	N/A	N/A
Implicit	N/A	N/A	Target TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	Target TD's TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Binding table		RW	Opaque	N/A	Exclusive	None	None

5.4.63.5. Completion Status Codes**Table 5.256: TDH.SERVTD.PREBIND Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SERVTD_ALREADY_BOUND_FOR_TYPE	
TDX_SUCCESS	TDH.SERVTD.PREBIND is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	

5.4.64. TDH.SYS.CONFIG Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Globally configure the Intel TDX Module.

5.4.64.1. Input Operands

Table 5.257: TDH.SYS.CONFIG Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 45
		23:16	Version Number	Selects the SEAMCALL interface function version Versions 0 and 1 are supported. See enumeration details below.
		63:24	Reserved	Must be 0
RCX	TDMR_INFO_HPA	The physical address of an array of pointers, each containing the physical address of a single TDMR_INFO entry (see 3.3.3). The pointer array must be sorted such that TDMR base addresses (TDMR_INFO.TDMR_BASE) are sorted from the lowest to the highest base address, and TDMRs do not overlap with each other.		
RDX	TDMR_INFO_NUM	The number of pointers in the above buffer, between 1 and 64		
R8	INIT_PARAMS	Bits	Name	Description
		15:0	HKID	TDX Module's global private HKID value
		16	DYNAMIC_PAMT	Selects whether the TDX Module will use a static or dynamic allocation of PAMT 0: Static PAMT 1: Dynamic PAMT Enumeration: Support of Dynamic PAMT is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36), readable by TDH.SYS.RD*.
		63:17	Reserved	Reserved: must be 0
R9	FEATURES_ENABLED0	If the requested version in RAX is 1 or higher, R9 specifies TDX Module feature enabling flags, formatted similarly to TDX_FEATURES0, readable by TDH.SYS.RD*. A bit may be set to 1 if the corresponding TDX_FEATURES0 bit is 1. Else, R9 is ignored.		

		6	TDX_CONNECT	Enables TDX Connect Enumeration: Support of TDX Connect is enumerated by TDX_FEATURES0.TDX_CONNECT (bit 6), readable by TDH.SYS.RD*.
		41	NON_BLOCKING_EXPORT	Controls TD export mode: 0: Write-blocking based export 1: Non-blocking export
		49	TDID_VMID_REPORTING	Controls TDREPORT_STRUCT content: 0: Default 1: Enable the TDID256, VMID and VALID fields
		Bits whose value in TDX_FEATURES0 is 0		Must be 0
		Other bits		Ignored
R10	FEATURES_ENABLE1	If the requested version in RAX is 1 or higher, R10 is reserved for additional TDX Module feature enabling flags. Its value must be 0. Else, R10 is ignored.		
R11	RTC	If the requested version in RAX is 1 or higher, R11 provides a real-time clock (RTC) value – the number of seconds passes since 1/1/1970. RTC value must be lower than 2 ⁶² . A value of 0 indicates that no RTC is provided. If FEATURE_ENABLES0.TDX_CONNECT (R9 bit 6) is 1, R11 must not be 0. Else, R11 is ignored.		

5.4.64.2. Output Operands

Table 5.258: TDH.SYS.CONFIG Output Operands Definition

Operand	Name	Description
RAX	Status	SEAMCALL instruction return code – see 5.4.1
Other		Unmodified

5 5.4.64.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.64.3.1. Overview

10 TDH.SYS.CONFIG performs global (platform-scope) configuration of the Intel TDX Module. This function is intended to be executed during OS/VMM boot, and thus it has relaxed latency requirements.

5.4.64.3.2. Enumeration

Support of dynamic PAMT is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36), readable by the host VMM using TDH.SYS.RD*.

Support of TDX Connect is enumerated by TDX_FEATURES0.TDX_CONNECT (bit 6).

15 TDH.SYS.CONFIG version 1 is supported if the value of any of the following TDX_FEATURES0 bits is 1, indicating that their respective features are supported:

- TDX_CONNECT (bit 6)

- NRX (bit 39)
- NON_BLOCKING_EXPORT (bit 41)
- TDID_VMID_REPORTING (bit 49)

5.4.64.3.3. Private HKID Space Impact

- 5 To be configured for dynamic PAMT (if supported by the TDX Module), the HKID address space partitioning may be required to be configured such that the number of bits allocated to memory encryption keys is not lower than a certain minimum. This is enumerated by MIN_DYNAMIC_PAMT_NUM_HKID_BITS, readable by TDH.SYS.RD*.

5.4.64.4. Operands Information

- 10 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.259: TDH.SYS.CONFIG Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDMR Info Pointers	Array of HPA	R	Shared	512B	None	N/A	N/A
Explicit	N/A	HPA	TDMR Info	TDMR_INFO	R	Shared	512B	None	N/A	N/A
Implicit	N/A	N/A	All Intel TDX Module internal variables	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.64.5. Completion Status Codes

Table 5.260: TDH.SYS.CONFIG Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INVALID_PAMT	
TDX_INVALID_RESERVED_IN_TDMR	
TDX_INVALID_TDMR	
TDX_NON_ORDERED_RESERVED_IN_TDMR	
TDX_NON_ORDERED_TDMR	
TDX_OPERAND_INVALID	
TDX_PAMT_OUTSIDE_CMRS	
TDX_PAMT_OVERLAP	
TDX_SUCCESS	TDH.SYS.CONFIG is successful.
TDX_SYS_BUSY	The operation was invoked when another TDX Module operation was in progress. The operation may be retried.
TDX_SYS_CONFIG_NOT_PENDING	
TDX_SYS_SHUTDOWN	

Completion Status Code	Description
TDX_TDMR_ALREADY_INITIALIZED	
TDX_TDMR_OUTSIDE_CMRS	

5.4.65. TDH.SYS.DISABLE Leaf

Unreleased Feature: Some of the text in this section is related to TDX Module Reinitialization, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Disable the TDX Module, reset its internal state and reclaim all memory resources that have been assigned to TDX. Once the TDH.SYS.DISABLE completes successfully, the host VMM may reinitialize the TDX Module (TDH.SYS.INIT etc.).

5.4.65.1. Input Operands

Table 5.261: TDH.SYS.DISABLE Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 69
		23:16	Version Number	Must be 0.
		63:24	Reserved	Must be 0.

10 5.4.65.2. Output Operands

Table 5.262: TDH.SYS.DISABLE Output Operands Definition

Operand	Name	Description
RAX	Status	SEAMCALL instruction return code – see 5.4.1
Other		Unmodified

5.4.65.3. Leaf Function Description

- 15 **Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.65.3.1. Overview

TDH.SYS.DISABLE disables the current TDX Module and frees up all memory resources that have been allocated to TDX. As a prerequisite, no LP may be executing in SEAM mode, i.e., no SEAMCALL may be running.

TDH.SYS.DISABLE does the following:

- 20
1. Reclaim all TDX memory resources. This includes memory that has been allocated to the TDX Module (e.g., PAMT arrays, memory pool pages, etc.) and memory allocated to TDs (e.g., TD private pages, Secure EPT pages, TD control structure pages etc.). The TDX Module initializes all those memory resources as shared memory with HKID 0 and sets their contents to 0.
 2. Reset the TDX Module internal state to its initial state, as if it has just been freshly loaded by the P-SEAMLDR.

25 5.4.65.3.2. Enumeration

Support of TDH.SYS.DISABLE is enumerated by TDX_FEATURES0.SYS_DISABLE (bit 53), readable by the host VMM using TDH.SYS.RD*.

5.4.65.3.3. Interruption and Resumption

- 30 If a pending interrupt is detected during operation, TDH.SYS.DISABLE returns with a TDX_INTERRUPTED_RESUMABLE status in RAX.

TDH.SYS.DISABLE is designed to be invoked in a loop until its operation is done:

1. Call TDH.SYS.DISABLE.
2. While RAX indicates TDX_INTERRUPTED_RESUMABLE:
 - 2.1. Call TDH.SYS.DISABLE.
 - 2.2. If an error indication other than TDX_INTERRUPTED_RESUMABLE is returned, abort.

5.4.65.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.263: TDH.SYS.DISABLE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	HPA	PAMT region	Blob	RW	Hidden	N/A	Exclusive	N/A	N/A
Implicit	N/A	N/A	All Intel TDX Module internal variables	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

10

5.4.65.5. Completion Status Codes

Table 5.264: TDH.SYS.DISABLE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INTERRUPTED_RESUMABLE	
TDX_SUCCESS	TDH.SYS.DISABLE is successful.
TDX_SYS_BUSY	The operation was invoked when another TDX Module operation was in progress. The operation may be retried.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	

5.4.66. TDH.SYS.INFO Leaf

Provide information about the Intel TDX Module and the convertible memory.

Warning: TDH.SYS.INFO is provided for backward compatibility; it does not provide all the TDX Module enumeration, and some fields (e.g., TDSYSINFO_STRUCT.TDCS_BASE_SIZE) are limited in their forward compatibility. It is strongly recommended to use TDH.SYS.RD and/or TDH.SYS.RDALL to read Intel TDX Module information.

5.4.66.1. Input Operands

Table 5.265: TDH.SYS.INFO Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 32
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address (including HKID bits) of a buffer where the output TDSYSINFO_STRUCT will be written		
RDX	The number of bytes in the above buffer		
R8	The physical address (including HKID bits) of a buffer where an array of CMR_INFO will be written		
R9	The number of CMR_INFO entries in the above buffer		

5.4.66.2. Output Operands

Table 5.266: TDH.SYS.INFO Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RDX	The actual number of bytes written to the above buffer In case of an error, as indicated by RAX, RDX returns 0.
R9	The number of CMR_INFO entries actually written to the above buffer In case of an error, as indicated by RAX, R9 returns 0.
Other	Unmodified

5.4.66.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.SYS.INFO provides information about the Intel TDX Module and about the memory configuration.

5.4.66.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.267: TDH.SYS.INFO Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDX system information structure	TDSYSINFO_STRUCT	RW	Shared	1024B	None	N/A	N/A
Explicit	R8	HPA	CMR table	CMR_INFO_ARRAY	RW	Shared	512B	None	N/A	N/A

5.4.66.5. Completion Status Codes**Table 5.268: TDH.SYS.INFO Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDH.SYS.INFO is successful.
TDX_SYS_SHUTDOWN	
TDX_SYSINITLP_NOT_DONE	

5.4.67. TDH.SYS.INIT Leaf

Globally initialize the Intel TDX Module.

5.4.67.1. Input Operands**Table 5.269: TDH.SYS.INIT Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 33
	23:16	Version Number	Selects the SEAMCALL interface function version May be 0 or 1 (see enumeration details below)
	63:24	Reserved	Must be 0
RCX	Reserved		
	Bits	Name	Description
	63:0	RESERVED	Reserved: must be 0
R8	Fatal error diagnostics configuration If the version number provided in RAX is 0, this field is ignored.		
	Bits	Name	Description
	5:0	RESERVED	Must be 0
	51:6	FATAL_INFO_HPA	Bits 51:6 of the shared host physical address (including HKID) of where FATAL_INFO will be written by the TDX Module in case a TDX Module fatal error is detected. The host VMM should clear the FATAL_INFO to all-0 before calling TDH.SYS.INIT. A value of all-1 indicates FATAL_INFO should not be written.
	53:52	RESERVED	Must be 0
	55:54	NOTIFICATION_INTR	Mode of notification interrupt to be broadcast by the TDX Module to all logical processors in case a TDX Module fatal error is detected. 0: No notification interrupt 1: Interrupt 2: NMI 3: SMI
	63:56	NOTIFICATION_VECTOR	Vector of the above notification interrupt, if the selected mode is 1 (interrupt). Value must be in the range 16:255. If other modes are selected, this field is ignored.

5.4.67.2. Output Operands

Table 5.270: TDH.SYS.INIT Output Operands Definition

Operand	Description		
RAX	SEAMCALL instruction return code – see 5.4.1		
RCX	Extended error information part 1 If RAX returns TDX_INCORRECT_CPUID_VALUE, RCX returns the applicable CPUID information as shown below. In all other cases, RCX returns 0.		
	Bits	Name	Description
	31:0	LEAF	CPUID leaf number
	63:32	SUBLEAF	CPUID sub-leaf number: if sub-leaf is not applicable, value is -1 (0xFFFFFFFF).
RDX	Extended error information part 2 If RAX returns TDX_INCORRECT_CPUID_VALUE, RDX returns the value masks as shown below. A bit value of 1 indicates a bit position that was checked against the required value. In all other cases, RDX returns 0.		
	Bits	Name	Description
	31:0	MASK_EAX	Mask of the value returned by CPUID in EAX
	63:32	MASK_EBX	Mask of the value returned by CPUID in EBX
R8	Extended error information part 3 If RAX returns TDX_INCORRECT_CPUID_VALUE, R8 returns the value masks as shown below. A bit value of 1 indicates a bit position that was checked against the required value. In all other cases, R8 returns 0.		
	Bits	Name	Description
	31:0	MASK_ECX	Mask of the value returned by CPUID in ECX
	63:32	MASK_EDX	Mask of the value returned by CPUID in EDX
R9	Extended error information part 4 If RAX returns TDX_INCORRECT_CPUID_VALUE, R9 returns the expected values as shown below. In all other cases, R9 returns 0.		
	Bits	Name	Description
	31:0	VALUE_EAX	Value expected to be returned by CPUID in EAX
	63:32	VALUE_EBX	Value expected to be returned by CPUID in EBX
R10	Extended error information part 5 If RAX returns TDX_INCORRECT_CPUID_VALUE, R10 returns the expected values as shown below. In all other cases, R10 returns 0.		
	Bits	Name	Description
	31:0	VALUE_ECX	Value expected to be returned by CPUID in ECX
	63:32	VALUE_EDX	Value expected to be returned by CPUID in EDX
Other	Unmodified		

5.4.67.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.67.3.1. Overview

TDH.SYS.INIT performs global (platform-scope) initialization of the Intel TDX Module. This function is intended to be executed during OS/VMM boot and thus it has relaxed latency requirements.

5.4.67.3.2. Enumeration

Support of TDH.SYS.INIT version higher than 0 is enumerated by TDX_FEATURES0.FATAL_DIAGNOSTICS (bit 37), readable by the host VMM using TDH.SYS.RD*.

5.4.67.3.3. Special Environment Requirements

If the IA32_TSX_CTRL MSR is supported by the CPU, as enumerated by IA32_ARCH_CAPABILITIES.TSX_CTRL (bit 7), then the values of its following bits must be 0:

- RTM_DISABLE (bit 0)
- TSX_CPUID_CLEAR (bit 1)

The IA32_MISC_PACKAGE_CTRL MSR must be supported by the CPU, as enumerated by IA32_ARCH_CAPABILITIES.MISC_PACKAGE_CTRL (bit 11). IA32_MISC_PACKAGE_CTL.ENERGY_FILTERING_ENABLE (bit 0) must be set to 1.

5.4.67.3.4. Leaf Function Latency

TDH.SYS.INIT execution time may be longer than most TDX Module interface functions execution time. No interrupts (including NMI and SMI) are processed by the logical processor during that time.

5.4.67.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.271: TDH.SYS.INIT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	R8 ⁴⁰	HPA	FATAL_INFO_HPA	FATAL_INFO	RW	Shared	64 bytes	N/A	N/A	N/A
Implicit	N/A	N/A	All Intel TDX Module internal variables	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.67.5. Completion Status Codes

Table 5.272: TDH.SYS.INIT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_LIMIT_CPUID_MAXVAL_SET	
TDX_CPUID_LEAF_1F_FORMAT_UNRECOGNIZED	

⁴⁰ Applicable only if the requested version number (in RAX) is higher than 0.

Completion Status Code	Description
TDX_CPUID_LEAF_1F_NOT_SUPPORTED	
TDX_CPUID_LEAF_0D_INCONSISTENT	
TDX_INCORRECT_CPUID_VALUE	Additional information is provided in RCX – R10
TDX_INCORRECT_MSR_VALUE	
TDX_INVALID_WBINVD_SCOPE	
TDX_RND_NO_ENTROPY	Random number generation (e.g., RDRAND or RDSEED) failed because the hardware random number generator did not have enough entropy. The host VMM should retry the operation.
TDX_SMRR_LOCK_NOT_SUPPORTED	
TDX_SMRR_NOT_LOCKED	
TDX_SMRR_NOT_SUPPORTED	
TDX_SMRR_OVERLAPS_CMR	
TDX_SUCCESS	TDH.SYS.INIT is successful.
TDX_SYS_BUSY	The operation was invoked when another TDX Module operation was in progress. The operation may be retried.
TDX_SYS_SHUTDOWN	
TDX_SYS_INIT_NOT_PENDING	

5.4.68. TDH.SYS.KEY.CONFIG Leaf

Configure the Intel TDX global private key on the current package.

5.4.68.1. Input Operands**Table 5.273: TDH.SYS.KEY.CONFIG Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 31
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0

5.4.68.2. Output Operands**Table 5.274: TDH.SYS.KEY.CONFIG Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.68.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.68.3.1. Overview

TDH.SYS.KEY.CONFIG performs package-scope Intel TDX global private key configuration.

5.4.68.3.2. Failure Conditions

TDH.SYS.KEY.CONFIG may fail due to the following conditions:

- A conflict with a PCONFIG instruction running on the same package. In this case, a TDX_OPERAND_BUSY status is returned.
- Failure to generate a random key, typically caused by an entropy error of the CPU's random number generator, and may be impacted by RDSEED, RDRAND or PCONFIG executing on other LPs. In this case, a TDX_KEY_GENERATION_FAILED is returned.

5.4.68.3.3. Leaf Function Latency

TDH.SYS.KEY.CONFIG execution time may be longer than most TDX Module interface functions execution time. No interrupts (including NMI and SMI) are processed by the logical processor during that time.

5.4.68.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.275: TDH.SYS.KEY.CONFIG Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	All Intel TDX Module internal variables	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.68.5. Completion Status Codes**Table 5.276: TDH.SYS.KEY.CONFIG Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_KEY_CONFIGURED	
TDX_KEY_GENERATION_FAILED	Failed to generate a random key. This is typically caused by an entropy error of the CPU's random number generator, and may be impacted by RDSEED, RDRAND or PCONFIG executing on other LPs. The operation should be retried.
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation. Specifically, key configuration may fail due to a concurrently running PCONFIG instruction.
TDX_SUCCESS	TDH.SYS.KEY.CONFIG is successful.
TDX_SYS_BUSY	The operation was invoked when another TDX Module operation was in progress. The operation may be retried.
TDX_SYS_KEY_CONFIG_NOT_PENDING	
TDX_SYS_SHUTDOWN	

5.4.69. TDH.SYS.LP.INIT Leaf

Initialize the Intel TDX Module at the current logical processor scope.

5.4.69.1. Input Operands**Table 5.277: TDH.SYS.LP.INIT Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 35
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0

5.4.69.2. Output Operands**Table 5.278: TDH.SYS.LP.INIT Output Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction return code – see 5.4.1		
RCX	Extended error information part 1 If RAX returns TDX_INCONSISTENT_CPUID_FIELD, RCX returns the applicable CPUID information as shown below. In all other cases, RCX returns 0.		
	Bits	Name	Description
	31:0	LEAF	CPUID leaf number
	63:32	SUBLEAF	CPUID sub-leaf number: if sub-leaf is not applicable, value is -1 (0xFFFFFFFF).
RDX	Extended error information part 2 If RAX returns TDX_INCONSISTENT_CPUID_FIELD, RDX returns the value masks as shown below. A bit value of 1 indicates a bit position that was checked against the same CPUID leaf value checked during TDH.SYS.INIT. In all other cases, RDX returns 0.		
	Bits	Name	Description
	31:0	MASK_EAX	Mask of the value returned by CPUID in EAX
	63:32	MASK_EBX	Mask of the value returned by CPUID in EBX
R8	Extended error information part 3 If RAX returns TDX_INCONSISTENT_CPUID_FIELD, R8 returns the value masks as shown below. A bit value of 1 indicates a bit position that was checked against the same CPUID leaf value checked during TDH.SYS.INIT. In all other cases, R8 returns 0.		
	Bits	Name	Description

Operand	Description		
	31:0	MASK_ECX	Mask of the value returned by CPUID in ECX
	63:32	MASK_EDX	Mask of the value returned by CPUID in EDX
Other	Unmodified		

5.4.69.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.69.3.1. Overview

TDH.SYS.LP.INIT performs LP-scope initialization of the Intel TDX Module. This function is intended to be executed during OS/VMM boot, and thus it has relaxed latency requirements.

5.4.69.3.2. Special Environment Requirements

If the IA32_TSX_CTRL MSR is supported by the CPU, as enumerated by IA32_ARCH_CAPABILITIES.TSX_CTRL (bit 7), then the values of its following bits must be 0:

- RTM_DISABLE (bit 0)
- TSX_CPUID_CLEAR (bit 1)

The IA32_MISC_PACKAGE_CTRL MSR must be supported by the CPU, as enumerated by IA32_ARCH_CAPABILITIES.MISC_PACKAGE_CTRL (bit 11). IA32_MISC_PACKAGE_CTL.ENERGY_FILTERING_ENABLE (bit 0) must be set to 1.

5.4.69.3.3. Leaf Function Latency

TDH.SYS.LP.INIT execution time may be longer than most TDX Module interface functions execution time. No interrupts (including NMI and SMI) are processed by the logical processor during that time.

5.4.69.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.279: TDH.SYS.LP.INIT Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	All Intel TDX Module internal variables	N/A	RW	Hidden	N/A	Shared	N/A	N/A

5.4.69.5. Completion Status Codes

Table 5.280: TDH.SYS.LP.INIT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCONSISTENT_CPUID_FIELD	Additional information is provided in RCX – R8
TDX_INCONSISTENT_MSR	
TDX_INCORRECT_MSR_VALUE	
TDX_INVALID_PKG_ID	

Completion Status Code	Description
TDX_RND_NO_ENTROPY	Random number generation (e.g., RDRAND or RDSEED) failed because the hardware random number generator did not have enough entropy. The host VMM should retry the operation.
TDX_SUCCESS	TDH.SYS.LP.INIT is successful.
TDX_SYS_BUSY	The operation was invoked when another TDX Module operation was in progress. The operation may be retried.
TDX_SYS_LP_INIT_DONE	
TDX_SYS_LP_INIT_NOT_PENDING	
TDX_SYS_SHUTDOWN	

5.4.70. TDH.SYS.LP.SHUTDOWN Leaf (Deprecated)

This function is deprecated; it is provided for backward compatibility.

5.4.70.1. Input Operands**Table 5.281: TDH.SYS.LP.SHUTDOWN Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 44
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0

5.4.70.2. Output Operands**Table 5.282: TDH.SYS.LP.SHUTDOWN Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.70.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.SYS.LP.SHUTDOWN does nothing.

5.4.70.4. Completion Status Codes**Table 5.283: TDH.SYS.LP.SHUTDOWN Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_SUCCESS	TDH.SYS.LP.SHUTDOWN is successful.

5.4.71. TDH.SYS.RD Leaf

Read a TDX Module global-scope metadata field.

5.4.71.1. Input Operands

Table 5.284: TDH.SYS.RD Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 34
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. A value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		

5.4.71.2. Output Operands

Table 5.285: TDH.SYS.RD Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RDX	If the input field identifier was -1, RDX returns the first readable field identifier. Else, in case of an error, RDX returns -1. On success, RDX returns the next readable field identifier. A value of -1 indicates no next field identifier is available.
R8	Contents of the field In case of no success, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.4.71.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.71.3.1. Overview

TDH.SYS.RD reads a TDX Module global-scope metadata field.

RDX returns the next host-side readable field identifier. This may be used by the host VMM to enumerate the TDX Module's capabilities and configuration. To read all the available fields, the host VMM can invoke TDH.SYS.RD in a loop, starting with field identifier -1 as an input, until RDX returns -1. A status code of TDX_METADATA_FIELD_SKIP indicates that the returned value is not applicable. Alternatively, the host VMM can use TDH.SYS.RDALL.

5.4.71.3.2. Enumeration

Availability of TDH.SYS.RD is enumerated by TDSYSINFO_STRUCT.SYS_RD, returned by TDH.SYS.INFO (see 3.3.6). It is also enumerated by TDX_FEATURES0.ENHANCED_METADATA (bit 3), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SYS.RD returns a TDX_OPERAND_INVALID(RAX) status.

5 5.4.71.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.286: TDH.SYS.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
There are no relevant memory operands.										

10 5.4.71.5. Completion Status Codes

Table 5.287: TDH.SYS.RD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIRST_FIELD_ID_IN_CONTEXT	Indicates that the first field ID in context is returned
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDH.SYS.RD is successful.
TDX_SYS_SHUTDOWN	
TDX_SYSINITLP_NOT_DONE	

5.4.72. TDH.SYS.RDALL Leaf

Read all host-readable TDX Module global-scope metadata fields.

5.4.72.1. Input Operands

Table 5.288: TDH.SYS.RDALL Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 37
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RDX	The physical address (including HKID bits) of a 4KB page where a metadata list will be returned In case of error, some field value entries might not contain valid data.		
R8	Initial field identifier – see 3.10 If R8's value is -1, then TDG.SYS.RDALL will start from the first global-scope metadata field identifier. Else, LAST_ELEMENT_IN_FIELD, LAST_FIELD_IN_SEQUENCE, WRITE_MASK_VALID and CONTEXT_CODE fields are ignored. The FIELD_CODE must be the code of the first element of a metadata field.		

5.4.72.2. Output Operands

Table 5.289: TDH.SYS.RDALL Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
R8	Next field identifier. A value of -1 means all applicable field identifiers have been returned in the metadata list. In case of an error, as indicated by RAX, R8 returns -1.
Other	Unmodified

5.4.72.3. Leaf Function Description

- 10 **Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.72.3.1. Overview

TDH.SYS.RDALL reads all host-readable TDX Module global-scope metadata fields into a metadata list in the provided page.

- 15 If one or more applicable fields do not fit in the provided list buffer, the function can be invoked in a loop, each invocation providing an initial field identifier returned as the next field identifier of the previous invocation, as shown in the following example:

1. NEXT_FIELD_ID = -1

2. Repeat:
 - 2.1. Set LIST_BUFFER to the next 4K buffer
 - 2.2. Invoke TDH.SYS.RDALL(RDX = LIST_BUFFER, R8 = NEXT_FIELD_ID)
 - 2.3. STATUS = RAX, NEXT_FIELD_ID = R8
5. Until ((STATUS is a non-recoverable error) or (NEXT_FIELD_ID is -1))

The function never returns an empty list if there's no error.

5.4.72.3.2. Enumeration

Availability of TDH.SYS.RDALL is enumerated by TDSYSINFO_STRUCT.SYS_RD, returned by TDH.SYS.INFO (see 3.3.6). It is also enumerated by TDX_FEATURES0.ENHANCED_METADATA (bit 3), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SYS.RDALL returns a TDX_OPERAND_INVALID(RAX) status.

5.4.72.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.290: TDH.SYS.RDALL Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RDX	HPA	Metadata list	MD_LIST	RW	Shared	4KB	None	None	None

5.4.72.5. Completion Status Codes

Table 5.291: TDH.SYS.RDALL Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.SYS.RDALL is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	

5.4.73. TDH.SYS.S4_END Leaf

Help prevent replay attacks, by preventing future S4 restoration using the current global S4 session's anti-replay nonce, which was generated during the S4 hibernation session.

5.4.73.1. Input Operands

Table 5.292: TDH.SYS.S4_END Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 54
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0

5.4.73.2. Output Operands

Table 5.293: TDH.SYS.S4_END Output Operands Definition

Operand	Name	Description
RAX	Status	SEAMCALL instruction return code – see 5.4.1
Other		Unmodified

5.4.73.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.73.3.1. Overview

TDH.SYS.S4_END generates a new anti-replay nonce. This helps prevent replay attack which may attempt to start a new S4 resumption session and resume the TDs using the anti-replay nonce generated during the S4 hibernation session.

5.4.73.3.2. Enumeration

Availability of TDH.SYS.S4_END is enumerated by TDX_FEATURES0.S4 (bit 13), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SYS.S4_END returns a TDX_OPERAND_INVALID(RAX) status.

5.4.73.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.294: TDH.SYS.S4_END Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
PL.S4_STATE	N/A	N/A	PL.S4_STATE	N/A	RW	Hidden	N/A	Exclusive	None	None

5.4.73.5. Completion Status Codes

Table 5.295: TDH.SYS. S4_END Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_SUCCESS	TDH.SYS.S4_END is successful.
TDX_OPERAND_BUSY	
TDX_SYS_NOT_READY	TDH.SYS. S4_END was called when TDX Module's lifecycle state is not SYS_READY.

5.4.74. TDH.SYS.SHUTDOWN Leaf

Initiate Intel TDX Module shutdown and generate handoff data for the next Intel TDX Module.

5.4.74.1. Input Operands

Table 5.296: TDH.SYS.SHUTDOWN Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 52
		23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	HANDOFF	Handoff parameters		
		Bits	Field	Description
		15:0	REQ_HV	Requested handoff version
		16	AVOID_COMPAT_SENSITIVE	Flags that TDH.SYS.SHUTDOWN should fail if any TD is in a phase sensitive to update compatibility See below for enumeration details.
		63:7	Reserved	Must be 0

5.4.74.2. Output Operands

Table 5.297: TDH.SYS.SHUTDOWN Output Operands Definition

Operand	Name	Description
RAX	Status	SEAMCALL instruction return code – see 5.4.1
Other		Unmodified

5.4.74.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.74.3.1. Overview

TDH.SYS.SHUTDOWN initiates Intel TDX Module shutdown and generates handoff data for the next Intel TDX Module. The host VMM should call TDH.SYS.SHUTDOWN when no concurrent LP is in SEAM mode, i.e., all SEAMCALL interface functions except the current one have returned to the host VMM.

Following TDH.SYS.SHUTDOWN, no further TDX Module interface functions can be called until a new module is installed.

5.4.74.3.2. Enumeration

Availability of TDH.SYS.SHUTDOWN is enumerated by TDX_FEATURES0.TD_PRESERVING (bit 1), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SYS.SHUTDOWN returns a TDX_OPERAND_INVALID(RAX) status.

Availability of the AVOID_COMPAT_SENSITIVE input flag is enumerated by TDX_FEATURES0.UPDATE_COMPATIBILITY.

5.4.74.3.3. Handoff Version Considerations

The REQ_HV input parameter specifies the required version of the handoff data prepared by TDH.SYS.UPDATE, which will be consumed by the TDX Module that will be installed. REQ_HV must comply with the following conditions:

- 5 • If the current module supports downgrade on update (NO_DOWNGRADE is 0), then REQ_HV must be no lower than MIN_UPDATE_HV, the minimal update handoff version supported by the TDX Module, and no higher than MODULE_HV, the current handoff version of the TDX Module.
- Else, REQ_HV must be the same as MODULE_HV, the current handoff version of the TDX Module.

NO_DOWNGRADE, MIN_UPDATE_HV and MODULE_HV can be read by the host VMM using TDH.SYS.RD*.

- 10 For details, see the [TDX Module Base Spec] section titled “TD-Preserving TDX Module Update”.

5.4.74.3.4. Update Compatibility Considerations

TD-preserving TDX Module update may cause failure of some TD management operations in some cases, if it happens during phases of the TD lifecycle that are sensitive to update compatibility. For details, see the [TDX Module Base Spec] section titled “Compatibility Aspects of TD-Preserving Update”.

- 15 If supported by the TDX Module, the host VMM can set the AVOID_COMPAT_SENSITIVE flag to request the TDX Module to fail TDH.SYS.UPDATE if any of the TDs are currently in a state that is impacted by the update-sensitive cases. The compatibility checks done by TDH.SYS.UPDATE do not include the following cases:

- If any TD was initialized by an older TDX Module that did not enumerate TDX_FEATURES0.UPDATE_COMPATIBILITY as 1, TDH.SYS.SHUTDOWN does not check for a TD build in progress condition for that TD.
- 20 • If any TD migration session is in progress, and it was initialized by an older TDX Module that did not enumerate TDX_FEATURES0.UPDATE_COMPATIBILITY as 1, TDH.SYS.SHUTDOWN does not check for an interrupted TD migration function condition for that TD.

5.4.74.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

25

Table 5.298: TDH.SYS.SHUTDOWN Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	All Intel TDX Module internal variables	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.74.5. Completion Status Codes

Table 5.299: TDH.SYS.SHUTDOWN Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_INVALID	The requested handoff version is invalid.
TDX_SUCCESS	TDH.SYS.SHUTDOWN is successful.
TDX_SYS_BUSY	The operation was invoked when another TDX Module operation was in progress. The operation may be retried.

Completion Status Code	Description
TDX_SYS_NOT_READY	TDH.SYS.SHUTDOWN was called when TDX Module's lifecycle state is not SYS_READY.
TDX_UPDATE_COMPATIBILITY_SENSITIVE	TDH.SYS.SHUTDOWN detected that there is one or more ongoing flows which may not be compatible with an updated TDX Module.

5.4.75. TDH.SYS.TDMR.INIT Leaf

Partially initialize a Trust Domain Memory Region (TDMR) and its associated PAMT.

5.4.75.1. Input Operands

Table 5.300: TDH.SYS.TDMR.INIT Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 36
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical base address of a TDMR (HKID bits must be 0)		

5.4.75.2. Output Operands

Table 5.301: TDH.SYS.TDMR.INIT Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RDX	On successful completion, RDX returns the TDMR next-to-initialize address. This is the physical address of the last byte that has been initialized so far, rounded down to 1GB. In all other cases, RDX returns 0.
Other	Unmodified

5.4.75.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.75.3.1. Overview

TDH.SYS.TDMR.INIT partially initializes the metadata (PAMT) associated with a Trust Domain Memory Region (TDMR), while adhering to latency considerations. It can run concurrently on multiple LPs as long as each concurrent flow initializes a different TDMR. After each 1GB range of a TDMR has been initialized, that 1GB range becomes available for use by any Intel TDX function that creates a private TD page or a control structure page – e.g., TDH.MEM.PAGE.ADD, TDH.VP.ADDCX, etc.

5.4.75.3.2. Enumeration

Support of dynamic PAMT is enumerated by TDX_FEATURES0.DYNAMIC_PAMT (bit 36), readable by the host VMM using TDH.SYS.RD*.

5.4.75.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.302: TDH.SYS.TDMR.INIT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDMR	Blob	None	None	1GB	Exclusive	N/A	N/A
Implicit	N/A	HPA	PAMT region associated with TDMR	Blob	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.75.5. Completion Status Codes**Table 5.303: TDH.SYS.TDMR.INIT Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDH.SYS.TDMR.INIT is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TDMR_ALREADY_INITIALIZED	

5.4.76. TDH.SYS.UPDATE Leaf

Unreleased Feature: Some of the text in this section is related to Non-Blocking Export, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

- 5 Update the TDX Module and restore its internal variable from the handoff data prepared by the previous Intel TDX Module using TDH.SYS.SHUTDOWN.

5.4.76.1. Input Operands

Table 5.304: TDH.SYS.UPDATE Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	SEAMCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the SEAMCALL interface function: 53
		23:16	Version Number	Selects the SEAMCALL interface function version Versions 0 and 1 are supported. See enumeration details below.
		63:24	Reserved	Must be 0
R9	FEATURES_ENABLED0	If the requested version in RAX is 1 or higher, R9 specifies TDX Module feature enabling flags, formatted similarly to TDX_FEATURES0, readable by TDH.SYS.RD*. A bit may be set to 1 if the corresponding TDX_FEATURES0 bit is 1. There are limitations on how features can be enabled vs. the previous TDX Modules that ran on the platform since the initial TDX Module installation, as detailed below. Else, R9 is ignored.		
		Bits	Name	Description
		6	TDX_CONNECT	Enables TDX Connect. TDX Connect cannot be disabled if it was enabled for the pre-update TDX Module.
		41	NON_BLOCKING_EXPORT	Controls TD export mode: 0: Write-blocking based export. This value is valid only if the pre-update TDX module was configured for write-blocking based export. 1: Non-blocking export. This value is valid only if write-blocking based export session has never happened during the lifecycle of any of the previous TDX modules from which a TD-preserving update was done.
		47	UPDATE_COMPATIBILITY	Enables per-TD compatibility checks with internal metadata created by the previous TDX Module.
		49	TDID_VMID_REPORTING	Controls TDREPORT_STRUCT content: 0: Default 1: Enable the TDID256, VMID and VALID fields
		Bits whose value in TDX_FEATURES0 is 0		Must be 0

Operand	Name	Description
		Other bits Ignored
R10	FEATURES_ENABLE1	If the requested version in RAX is 1 or higher, R10 is reserved for additional TDX Module feature enabling flags. Its value must be 0. Else, R10 is ignored.
R11	RTC	If the requested version in RAX is 1 or higher, R11 provides a real-time clock (RTC) value – the number of seconds passes since 1/1/1970. RTC value must be lower than 2 ⁶² . A value of 0 indicates that no RTC is provided. If FEATURE_ENABLES0.TDX_CONNECT (R9 bit 6) is 1, R11 must not be 0. Else, R11 is ignored.

5.4.76.2. Output Operands

Table 5.305: TDH.SYS.UPDATE Output Operands Definition

Operand	Name	Description
RAX	Status	SEAMCALL instruction return code – see 5.4.1
Other		Unmodified

5.4.76.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.76.3.1. Overview

TDH.SYS.UPDATE reads the handoff data prepared by the previous Intel TDX Module using TDH.SYS.SHUTDOWN.

5.4.76.3.2. Enumeration

Availability of TDH.SYS.UPDATE is enumerated by TDX_FEATURES0.TD_PRESERVING (bit 1), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.SYS.UPDATE returns a TDX_OPERAND_INVALID(RAX) status.

Update compatibility check support is enumerated by TDX_FEATURES0.UPDATE_COMPATIBILITY (bit 47).

TDH.SYS.UPDATE version 1 is supported if the value of any of the following TDX_FEATURES0 bits is 1, indicating that their respective features are supported:

- TDX_CONNECT (bit 6)
- NRX (bit 39)
- NON_BLOCKING_EXPORT (bit 41)
- UPDATE_COMPATIBILITY (bit 47)
- TDID_VMID_REPORTING (bit 49)

5.4.76.3.3. Update Compatibility Checks

The FEATURES_ENABLE0.UPDATE_COMPATIBILITY (bit 47) input flag enables post-update compatibility checks of intermediate TD state saved by the previous TDX Module. See the discussion in the [Base FAS] section titled “Compatibility Aspects of TD-Preserving Update”. Note that the checks are not done by TDH.SYS.UPDATE itself, but later when specific interface functions, such as TDH.MEM.PAGE.ADD or TDH.EXPORT.STATE.TD, which use intermediate state saved by the previous TDX Module, are called.

5.4.76.3.4. Update Failure Scenarios

TDX Module update may fail in the following cases:

- No valid handoff data

- The old module's handoff data's version is too old for the current TDX Module
- The old module's handoff data's version is newer than the current TDX Module's handoff data version

On such failures the host VMM is expected to do one of the following:

- Request the Persistent SEAMLDR to update to another TDX Module (UPDATE scenario). If that update is successful, existing TDs are preserved.
- Keep the current TDX Module and continue with the non-update sequence (TDH.SYS.CONFIG, TDH.SYS.KEY.CONFIG etc.). In this case all existing TDs are lost.

5.4.76.3.5. TD Export Mode Configuration

As a rule, TD export mode (write-blocking export or non-blocking export) cannot be modified on TDX module update. However, there is an exception: Since write-blocking export is the default configuration, if write-blocking export was not used before, the updated module can be configured to non-blocking export.

5.4.76.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.306: TDH.SYS.UPDATE Operands Information

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	All Intel TDX Module internal variables	N/A	RW	Hidden	N/A	Exclusive	N/A	N/A

5.4.76.5. Completion Status Codes

Table 5.307: TDH.SYS.UPDATE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_CONNECT_INVALID_STATE	Applicable only for TDX Module and CPUs that support TDX Connect
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDH.SYS.UPDATE is successful.
TDX_SYS_BUSY	The operation was invoked when another TDX Module operation was in progress. The operation may be retried.
TDX_SYS_STATE_INCORRECT	TDH.SYS.SHUTDOWN was called when the TDX Module's lifecycle state is not SYSINIT_DONE or some LPs have not yet been initialized by TDH.SYS.LP.INIT.
TDX_SYS_INVALID_HANDOFF	The handoff data in SEAM range is invalid.

5.4.77. TDH.VP.ADDCX Leaf

Add a physical page to a TDVPS.

5.4.77.1. Input Operands**Table 5.308: TDH.VP.ADDCX Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 4
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a page where the TDCX page will be added (HKID bits must be 0)		
RDX	The physical address of a TDVPR page (HKID bits must be 0)		

5.4.77.2. Output Operands**Table 5.309: TDH.VP.ADDCX Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.77.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.77.3.1. Overview

TDH.VP.ADDCX adds a physical page to a TDVPS, as a child of a given TDVPR.

5.4.77.3.2. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for the new TDCX page. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.77.3.3. Control Structure Pages

Physical TDVPS pages allocated by TDH.VP.ADDCX can only be reclaimed as part of the TD's teardown sequence.

5.4.77.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.310: TDH.VP.ADDCX Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ⁴¹
Explicit	RCX	HPA	TDCX page	Blob	RW	Opaque	4KB	Exclusive	Shared	Shared	Exclusive
Explicit	RDX	HPA	TDVPR page	Blob	RW	Opaque	4KB	Exclusive	Shared	Shared	None
Implicit	N/A	HPA	TDR page	TDR	RW	Opaque	N/A	Shared	None	None	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	None

5.4.77.5. Completion Status Codes

Table 5.311: TDH.VP.ADDCX Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.VP.ADDCX is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCX_NUM_INCORRECT	
TDX_VCPU_STATE_INCORRECT	

⁴¹ ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

5.4.78. TDH.VP.CREATE Leaf

Create a guest TD VCPU and its TDVPS root page (TDVPR).

5.4.78.1. Input Operands

Table 5.312: TDH.VP.CREATE Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 10
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a page where TDVPR will be added (HKID bits must be 0)		
RDX	The physical address of the owner TDR page (HKID bits must be 0)		

5.4.78.2. Output Operands

Table 5.313: TDH.VP.CREATE Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.78.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.78.3.1. Overview

TDH.VP.CREATE begins the build sequence of a new guest TD VCPU. It adds a TDVPR page as a child of a TDR page.

5.4.78.3.2. Dynamic PAMT

If the TDX Module is configured for dynamic PAMT, the PAMT hierarchy can be built on demand. A TDX_MISSING_PAMT_PAGE_PAIR status indicates that a PAMT page pair is missing for the new TDVPR page. The host VMM may add it using TDH.PHYMEM.PAMT.ADD and retry the operation.

5.4.78.3.3. Control Structure Pages

The physical TDVPS root page allocated by TDH.VP.CREATE can only be reclaimed as part of the TD's teardown sequence.

5.4.78.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.314: TDH.VP.CREATE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions			
								Operand	Contain. 2MB	Contain. 1GB	ACT 2MB ⁴²
Explicit	RCX	HPA	TDVPR page	Blob	RW	Opaque	4KB	Exclusive	Shared	Shared	Exclusive
Explicit	RDX	HPA	TDR page	TDR	RW	Opaque	4KB	Shared	Shared	Shared	None
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	4KB	Shared(i)	N/A	N/A	None
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A	None

5.4.78.5. Completion Status Codes

Table 5.315: TDH.VP.CREATE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_MISSING_PAMT_PAGE_PAIR	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.VP.CREATE is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	

⁴² ACT is enumerated by TDX_FEATURES0.ACT, readable using TDH.SYS.RD.

5.4.79. TDH.VP.ENTER Leaf

Unreleased Feature: Some of the text in this section is related to Enhanced Interrupt Virtualization, a feature which has not been released yet at the time of writing of this document. Details related to that feature serve as a preview and are subject to change.

5 Enter TDX non-root operation.

From the host VMM's point of view, TDH.VP.ENTER is a complex operation that normally involves TD entry followed by a TD exit. Therefore, input and output operands are specified by multiple tables below.

5.4.79.1. Input Operands

TDH.VP.ENTER input format depends on how the previous TDH.VP.ENTER was terminated. There are two cases:

- 10
- Initial entry or following a previous asynchronous TD exit
 - Following a previous TDCALL(TDG.VP.VMCALL)

5.4.79.1.1. Input Format for Initial Entry or Following a Previous Asynchronous TD Exit

The following table details TDH.VP.ENTER input operands for **initial entry** or following a **previous asynchronous TD exit**.

Table 5.316: TDH.VP.ENTER Input Operands Format #1 Definition: Initial Entry or Following a Previous Asynchronous TD Exit

15

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 10
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	VCPU handle and flags		
	Bit(s)	Name	Description
	11:0	RESERVED	Must be 0
	51:12	TDVPR_HPA	Bits 51:12 of the physical address of the TD VCPU's TDVPR page (HKID bits must be 0)
	52	HOST_RECOVERABILITY_HINT	Applicable only following a previous trap-like asynchronous TD exit , where bit 60 (HOST_RECOVERABILITY_HINT) of the previous TDH.VP.ENTER completion status (returned in RAX) was set to 1. In all other cases this bit must be 0. 0: The host VMM hints that the guest-side function may possibly be retried (e.g., the host may have corrected some conditions). 1: The host VMM hints that the error is probably not recoverable. This bit is reflected to the guest TD in bit 60 of RAX.
	53	RESUME_L1	For partitioned TDs, indicates that the L1 VMM should be resumed. Applicable after TD exits from an L2 VM. 0: TDH.VP.ENTER resumes the L2 VM it last exited from. 1: TDH.VP.ENTER resumes L1 VMM, even if the previous TD exit was from an L2 VM.

Operand	Description		
	57:54	ON	Indicates an outstanding posted interrupt notification: Bit 54: Outstanding notification for L1 Bit 55: Outstanding notification for L2 VM #1 Bit 56: Outstanding notification for L2 VM #2 Bit 57: Outstanding notification for L2 VM #3 See enumeration details below.
	63:58	RESERVED	Must be 0

5.4.79.1.2. Input Format following a Previous TDCALL(TDG.VP.VMCALL)

The following table details TDH.VP.ENTER input operands for following a **previous synchronous TD exit (TDG.VP.VMCALL)**.

Table 5.317: TDH.VP.ENTER Input Operands Format #2 Definition: Following a Previous TDCALL(TDG.VP.VMCALL)

Operand	Description		
RAX	SEAMCALL instruction leaf and version numbers – see 5.4.1		
RCX	VCPU handle and flags		
	Bit(s)	Name	Description
	11:0	RESERVED	Must be 0
	51:12	TDVPR_HPA	Bits 51:12 of the physical address of the TD VCPU's TDVPR page (HKID bits must be 0)
	52	RESERVED	Must be 0
	53	RESUME_L1	For partitioned TDs, indicates that the L1 VMM should be resumed. Applicable after TD exits from an L2 VM. 0: TDH.VP.ENTER resumes the L2 VM it last exited from. 1: TDH.VP.ENTER resumes L1 VMM, even if the previous TD exit was from an L2 VM.
	57:54	ON	Indicates an outstanding posted interrupt notification: Bit 54: Outstanding notification for L1 Bit 55: Outstanding notification for L2 VM #1 Bit 56: Outstanding notification for L2 VM #2 Bit 57: Outstanding notification for L2 VM #3 See enumeration details below.
	63:58	RESERVED	Must be 0
RBX, RDX, RBP, RSI, RDI, R8 – R15	If the corresponding bit of RCX at the previous TD exit (i.e., previous TDH.VP.ENTER termination) was set to 1, the register value is passed as-is to the guest TD – see the description of TDG.VP.VMCALL in 5.5.26 for details. Else, the register value is not used as an input. If the TD's CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP can't be used to pass values to the guest TD. See the enumeration note below.		
XMM0 – XMM15	If the corresponding bit of RCX at the previous TD exit (i.e., previous TDH.VP.ENTER termination) was set to 1, the register value is passed as-is to the guest TD – see the description of TDG.VP.VMCALL in 5.5.26 for details. Else, the register value is not used as an input.		

5.4.79.2. Output Operands

TDH.VP.ENTER output format depends on how the function was terminated. There are multiple cases:

1. Error (No TD Entry)
2. Asynchronous TD exit following a TD entry (with a VMX architectural exit reason)
3. Asynchronous TD exit following a TD entry (with a non-VMX TD exit status)
4. Asynchronous TD exit following a TD entry (with cross-TD exit details)
5. TD exit due to a TDCALL(TDG.VP.VMCALL) following a TD entry
6. TD exit due to a guest TD request

All the TD exit cases formats share some fields, as described below.

5.4.79.2.1. Output Format #1: Error (No TD Entry)

The following table details TDH.VP.ENTER output operands when an error occurs, and the interface function returns **without entering the TD**.

Table 5.318: TDH.VP.ENTER Output Operands Format #1 Definition: On Error (No TD Entry)

Operand	Description			
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		63	ERROR	Set to 1
		47:32	CLASS and DETAILS_L1	None of the values detailed in the table below
		Other		See the function completion status definition in 5.4.1.
Other GPRs	Unmodified			
Extended State	Any extended state that the TD is allowed to use (per TDCS.XFAM) may be cleared to its architectural RESET state.			

5.4.79.2.2. Common Output Format on TD Exits

The following table details the common format of TDH.VP.ENTER output operands when TD entry succeeds, and later a TD exit occurs. The following tables provide information for each specific case.

Table 5.319: TDH.VP.ENTER Common Output Operands Format on TD Exits Following a TD Entry

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code – see the function completion status definition in 5.4.1.		
RCX	Common Exit Information	Index of the VM from which the TD exit occurred		
		Bit(s)	Name	Description
		31:0	Format Dependent	See specific output formats below
		33:32	VM	Index of the VM that was running at the time of TD exit
		63:34	RESERVED	Reserved, set to 0
RBX, RDX, RSI, RDI, R8 – R15	Format Dependent	See specific output formats below		

Operand	Name	Description
RBP	None	If the TD's CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP is unmodified. See the enumeration note below. Else, RBP may be modified.
Extended State		Any extended state that the TD is allowed to use (per TDCS.XFAM) is cleared to its architectural RESET state. In case of a TDCALL(TDG.VP.VMCALL) following a TD entry, XMM may contain output operands. See below for details.

5.4.79.2.3. Output Format #2: Asynchronous TD Exits Following a TD Entry (with a VMX Architectural Exit Reason)

The following table details TDH.VP.ENTER output operands when TD entry succeeds, and later an **asynchronous TD exit** occurs due to a **VMX architectural exit reason**.

Table 5.320: TDH.VP.ENTER Output Operands Format #2 Definition: On Asynchronous TD Exits Following a TD Entry (with a VMX Architectural Exit Reason)

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		31:0	DETAILS_L2: Exit Reason	VMCS exit reason Note: Exit reason TDCALL (77) is a special case, indicating a synchronous TD exit initiated by TDG.VP.VMCALL; see below.
		47:32	CLASS and DETAILS_L1	May have the following values: - TDX_SUCCESS, indicating a normal TD exit - TDX_NON_RECOVERABLE_VCPU, indicating that the VCPU is disabled - TDX_NON_RECOVERABLE_TD, indicating that the TD is disabled - TDX_NON_RECOVERABLE_TD_NON_ACCESSIBLE, indicating that the TD is disabled, and its private memory can't be accessed - TDX_TD_EXIT_ON_L2_VM_EXIT and TDX_TD_EXIT_ON_L2_TO_L1, indicating a debug TD exit on L2 transitions
		Other		See the function completion status definition in 5.4.1.
RCX	Exit Information	Index of the VM from which the TD exit occurred		
		Bit(s)	Name	Description
		31:0	EXIT_QUALIFICATION	VMCS exit qualification bits 31:0 Note: VMCS exit qualification bits 63:32 are always 0. When exit is due to an EPT violation, bits 31:7 are cleared to 0.
		33:32	VM	Index of the VM that was running at the time of TD exit
		62:34	RESERVED	Reserved, set to 0

Operand	Name	Description		
		63	IMM_RESUME_HINT	Indicates that the host VMM should resume the TD VCPU as soon as possible to handle a pending event See below for enumeration and configuration details.
RDX	Extended Exit Qualification	Additional non-VMX, TDX-specific information – see 3.7.1		
R8	Guest Physical Address	When exit is due to EPT violation or EPT misconfiguration, format is similar to the VMCS guest-physical address, except that bits 11:0 are cleared to 0. In other cases, R8 is cleared to 0.		
R9	VM-Exit Interruption Information	When exit is due to a vectored event, the format of bits 31:0 is similar to the VMCS VM-exit interruption information. Bits 63:32 are cleared to 0. In other cases, R9 is cleared to 0.		
RBX, RSI, RDI, R10 – R15	Reserved	Cleared to 0		
RBP	None	If the TD’s CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP is unmodified. See the enumeration note below. Else, RBP is cleared to 0.		
Extended State	Any extended state that the TD is allowed to use (per TDCS.XFAM) is cleared to its architectural RESET state.			

5.4.79.2.4. Output Format #3: Asynchronous TD Exits Following a TD Entry (with a non-VMX TD Exit Status)

The following table details TDH.VP.ENTER output operands when TD entry succeeds, and later an asynchronous TD exit occurs with a non-VMX TD exit status as described below.

5 **Table 5.321: TDH.VP.ENTER Output Operands Format #3 Definition: On Asynchronous TD Exits Following a TD Entry (with a non-VMX TD Exit Status)**

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		47:32	CLASS and DETAILS_L1	May have the following values: - TDX_HOST_PRIORITY_BUSY_TIMEOUT - TDX_NON_RECOVERABLE_TD_CORRUPTED_MD - TDX_TD_EXIT_BEFORE_L2_ENTRY - TDX_TDCALL_RATE_LIMIT - TDX_IPI_REQUEST - TDX_NV_NOT_UNIQUE
		Other		See the function completion status definition in 5.4.1.
RCX	Exit Information	TD exit information		
		Bit(s)	Name	Description
		31:0	RESERVED	Reserved, set to 0

Operand	Name	Description		
		33:32	VM	Index of the VM that was running at the time of TD exit
		62:34	RESERVED	Reserved, set to 0
		63	IMM_RESUME_HINT	Indicates that the host VMM should resume the TD VCPU as soon as possible to handle a pending event See below for enumeration and configuration details.
RDX, RBX, RSI, RDI, R8 – R15	Reserved	Cleared to 0 Note: In the future, if this format will be used with new status codes, these GPRs may be used to return additional information.		
RBP	None	If the TD’s CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP is unmodified. See the enumeration note below. Else, RBP is cleared to 0.		
Extended State	Any extended state that the TD is allowed to use (per TDCS.XFAM) is cleared to its architectural RESET state.			

5.4.79.2.5. Output Format #4: Asynchronous TD Exits Following a TD Entry (with Cross-TD Exit Details)

The following table details TDH.VP.ENTER output operands when TD entry succeeds, and later an asynchronous TD exit occurs due to a **cross-TD operation**, i.e., the current TD operating on another TD.

5 **Table 5.322: TDH.VP.ENTER Output Operands Format #4 Definition: On Asynchronous TD Exits Following a TD Entry (with Cross-TD Exit Details)**

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		47:32	CLASS and DETAILS_L1	May have the following values: - TDX_CROSS_TD_FAULT, indicating a fault-like asynchronous TD exit, with non-VMX cross-TD status. - TDX_CROSS_TD_TRAP, indicating a trap-like asynchronous TD exit, with non-VMX cross-TD status.
		Other		See the function completion status definition in 5.4.1.
RCX	Exit Information	TD exit information		
		Bit(s)	Name	Description
		32:0	RESERVED	Reserved, set to 0
		33:32	VM	Index of the VM that was running at the time of TD exit
		62:34	RESERVED	Reserved, set to 0
		63	IMM_RESUME_HINT	Indicates that the host VMM should resume the TD VCPU as soon as possible to handle a pending event See below for enumeration and configuration details.

Operand	Name	Description
RDX	Cross-TD Status	Status code of the error which caused the TD exit, using the same format as TDCALL instruction return code
R8	Target TD	HPA of the TDR page of the TD which was the target of the cross-TD operation
RBX, RSI, RDI, R9 – R15	Reserved	Cleared to 0
RBP	None	If the TD's CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP is unmodified. See the enumeration note below. Else, RBP is cleared to 0.
Extended State	Any extended state that the TD is allowed to use (per TDCS.XFAM) is cleared to its architectural RESET state.	

5.4.79.2.6. Output Format #5: TD Exit due to TDCALL(TDG.VP.VMCALL) Following a TD Entry

The following table details TDH.VP.ENTER output operands when TD entry succeeds, and later a **synchronous TD exit**, triggered by **TDG.VP.VMCALL**, occurs.

5 **Table 5.323: TDH.VP.ENTER Output Operands Format #5 Definition: On TDCALL(TDG.VP.VMCALL) Following a TD Entry**

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		31:0	DETAILS_L2: Exit Reason	VMCS exit reason, indicating TDCALL (77)
		47:32	CLASS and DETAILS_L1	Indicating TDX_SUCCESS
		Other		See the function completion status definition in 5.4.1.
RCX	Exit Information	TD exit information		
		Bit(s)	Name	Description
		31:0	PARAMS_MASK	Value as passed into TDCALL(TDG.VP.VMCALL) by the guest TD: indicates which part of the guest TD GPR and XMM state is passed as-is to the VMM and back. For details, see the description of TDG.VP.VMCALL in 5.5.26.
		33:32	VM	Index of the VM that was running at the time of TD exit
		62:34	RESERVED	Reserved, set to 0
		63	IMM_RESUME_HINT	Indicates that the host VMM should resume the TD VCPU as soon as possible to handle a pending event See below for enumeration and configuration details.
RBX, RDX, RBP, RDI, RSI, R8 – R15	GPRs	If the corresponding bit in RCX is set to 1, the register value is passed as-is from the guest TD’s input to TDG.VP.VMCALL. Else, the register value cleared to 0.		

Operand	Name	Description
		If the TD's CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP can't be used to pass values from the guest TD and is not modified from its input value. See the enumeration note below.
XMM0 – XMM15	XMMs	If the corresponding bit in RCX is set to 1, the register value is passed as-is from the guest TD's input to TDG.VP.VMCALL. Else, the register value cleared to 0.
Extended State except XMM		Any extended state, except XMM, that the TD is allowed to use (per TDCS.XFAM) is cleared to its architectural RESET state.

5.4.79.2.7. Output Format #6: TD Exit due to a Guest TD Request

The following table details TDH.VP.ENTER output operands when TD entry succeeds, and later on the TD requests calls a TDX Module guest-side function that eventually results in a request from the host VMM.

Table 5.324: TDH.VP.ENTER Output Operands Format #6 Definition: On TD Exit due to a Guest TD Request

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		47:32	CLASS and DETAILS_L1	May have the following values: - TDX_IOTLB_INV_REQUEST⁴³ - TDX_MMIO_ACCEPT_REQUEST⁴⁶
		Other		See the function completion status definition in 5.4.1.
RCX	Exit Information	TD exit information		
		Bit(s)	Name	Description
		31:0	RESERVED	Reserved, set to 0
		33:32	VM	Index of the VM that was running at the time of TD exit
63:34	RESERVED	Reserved, set to 0		
RDX, RBX, RSI, RDI, R8 – R15	Additional Information	For TDX Connect status codes (TDX_IOTLB_INV_REQUEST, TDX_MMIO_ACCEPT_REQUEST), refer to the [TDX Connect ABI Spec] for details. Any of those GPRs that do not return additional information is cleared to 0.		
RBP	None	If the TD’s CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP is unmodified. See the enumeration note below. Else, RBP is cleared to 0.		
Extended State	Any extended state that the TD is allowed to use (per TDCS.XFAM) is cleared to its architectural RESET state.			

⁴³ These status codes are applicable if the TDX Module supports TDX Connect, as enumerated by TDX_FEATURES0.TDX_CONNECT (bit 6), readable using TDH.SYS.RD*.

5.4.79.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.79.3.1. Overview

- 5 TDH.VP.ENTER enters TDX non-root operation. It returns immediately if TD entry fails. If TD entry succeeded, TDH.VP.ENTER returns when TD exit is initiated.

For partitioned TDs, the TD VCPU may operate in the L1 VM or one of the L2 VMs, if any. TD exit may be initiated from each of the TD's VMs. If the last TD exit was from an L2 VM, TDH.VP.ENTER resumes the same L2 VM, unless the RESUME_L1 input flag is set to 1, instructing TDH.VP.ENTER to resume the L1 VM.

10 5.4.79.3.2. Enumeration

Control of RBP usage as an input/output parameter by the TD's CONFIG_FLAG.NO_RBP_MOD is enumerated by TDX_FEATURES0.NO_RBP_MOD (bit 18), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, then RBP can be used by TDG.VP.VMCALL to pass information between the guest TD and the host VMM, although highly discouraged since it contradicts normal calling conventions ABI.

- 15 Support of the IMM_RESUME_HINT output flag is enumerated by TDX_FEATURES0.ENHANCED_INTR_STATE (bit 40).
Support of the ON input flags is enumerated by TDX_FEATURES0.ENHANCED_INTR_VIRTUALIZATION (bit 45).

5.4.79.3.3. CPU State Preservation Following a Successful TD Entry and a TD Exit

Following a successful TD entry and a TD exit, some CPU state is modified:

- Registers CR2, DR0, DR1, DR2, DR3, DR6 and DR7 are set to their architectural INIT value.
- XCRO is set to the TD's user-mode feature bits of XFAM (bits 7:0, 9).

5.4.79.3.3.1. MSR Preservation Description Files

Most of the MSR virtualization information is provided in separate files:

- **msr_preservation.pdf** provides a human-readable MSR preservation table. The table lists MSRs whose value may not be preserved across TD entry and exit.
- **msr_preservation.csv** provides the same table in a Comma-Separated Values (CSV) format. This file can be imported, if required, to tools such as MS Excel for further processing.

The tables below describe the information provided by those files. Additional information about specific MSRs is provided in the following sections.

In addition to the above files, **msr_preservation.json**, a JSON format file with the same information is provided.

30 **Table 5.325: MSR Preservation Table Description**

Column	Description
First (H)	Index of the first MSR in the range
Last (H)	Index of the last MSR in the range
Size (H)	Number of MSRs in the range
MSR Architectural Name	MSR name
MSR Value after TDH.VP.ENTER	Impact of TD entry and exit on MSR value; see the table below

Table 5.326: MSR Value after TDH.VP.ENTER Column Details

MSR Value after TDH.VP.ENTER	Description
INIT	The TDX Module sets the MSR to its RESET value.
Init(condition)	If the condition is true, the TDX Module sets the MSR to its RESET value. Else the MSR value is unmodified.

MSR Value after TDH.VP.ENTER	Description
Modified(condition)	If the condition is true, the MSR value may be modified. Else the MSR value is unmodified.

5.4.79.3.4. Special Environment Requirements

The value read from IA32_TSC_ADJUST MSR must be the same as it was during TDH.SYS.INIT.

5.4.79.3.5. Guest TD State Loading on VM Entry Failure

5 TDH.VP.ENTER may fail loading guest TD state in the cases shown in the table below. TDH.VP.ENTER returns with information detailing the failure case. Such failures may happen due to the following reasons:

- The TD is being debugged (its ATTRIBUTES.DEBUG bit is set) and the debugger sets some wrong guest state value using TDH.VP.WR. For a debuggable TD, the completion status (in RAX[63:32]) is set in such cases to TDX_SUCCESS, and the details are provided as described below. The debugger may update the VCPU state using TDH.VP.WR and invoke TDH.VP.ENTER again.
- The TD has been migrated, and some of its state is not compatible with the destination platform. The TDX Module does its best effort to check guest state values during import, but there might still be cases where incompatible guest TD state gets migrated. For a non-debuggable TD, the completion status (in RAX[63:32]) is set in such cases to TDX_NON_RECOVERABLE_TD, and the details are provided as described below. The host VMM should tear down the TD.

Table 5.327: Guest State Loading Errors

Guest State Loading Error	VM Exit Reason in RAX[31:0]	Extended Exit Qualification in RDX
Error while loading guest MSR values from TDVPS	34: VM-entry failure due to MSR loading	TD_ENTRY_MSR_LOAD_FAILURE with the MSR index
Error while loading CPU extended state from TDVPS	33: VM-entry failure due to invalid guest state	TD_ENTRY_XSTATE_LOAD_FAILURE
VM entry (VMLAUNCH or VMRESUME) which loads guest state from VMCS	33: VM-entry failure due to invalid guest state	NONE

5.4.79.3.6. IMM_RESUME_HINT

20 If supported by the TDX Module, IMM_RESUME_HINT serves as a hint to the host VMM that it should resume the TD as soon as possible, in order for it to process virtual interrupts. Its operation can be configured by the host VMM to be set if one or more TDVPS.VCPU_STATE_DETAILS bits are set. For details, see 4.2.2.3.

5.4.79.3.7. Outstanding Notification (ON)

25 If supported by the TDX Module, the ON input flags indicate that there is an outstanding posted interrupt set in a PID residing in shared memory (either as a regular PID or as a Shared PID), associated with the current VCPU. This indication serves as a hint, useful mainly when no notification interrupt is configured for that PID. If set, the TDX Module checks the PID's ON bit and handles any posted interrupt requests in the PID's PIR field as part of the TD entry flow.

If TD entry is to an L2 VM, i.e., the last TD exit was from L2 and the host VMM did not set the RESUME_L1 input flag, the TDX Module resumes L1 in the following cases:

30 **ON is set for L1:** The TDX Module checks the posted interrupt priority (RVI) vs. L1's current processor priority (Virtual APIC's PPR). If the posted interrupt priority is higher, i.e., L1 will immediately handle the interrupt, the TDX Module emulates an L2→L1 exit and resumes L1.

ON is set for any L2 VM: The TDX Module injects a wakeup interrupt to L1, if configured, and sets the applicable TDCS.WAKEUP_SENT flag. It then does an implicit L2→L1 exit and resumes L1. L1 is expected to handle the wakeup interrupt and enter the targeted L2 VM(s).

5.4.79.3.8. Leaf Function Latency

In some cases (e.g., suspected single/zero step attack mitigation), TDH.VP.ENTER execution time may be longer than most TDX Module interface functions execution time. No interrupts (including NMI and SMI) are processed by the logical processor during that time.

5.4.79.3.9. VCPU Association

TDH.VP.ENTER associates the target TD VCPU with the current LP. This requires that the VCPU will not be associated with another LP. For details, see the [TDX Module Base Spec].

5.4.79.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.328: TDH.VP.ENTER Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDVPR page	TDVPS	RW	Opaque	4KB	Shared(c) ⁴⁴	Shared(c) ⁴⁴	Shared(c) ⁴⁴
Implicit	N/A	HPA	TDR page	TDR	RW	Opaque	N/A	Shared(c) ⁴⁴	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i,c) ⁴⁴	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared(t) ⁴⁵	N/A	N/A
Implicit	N/A	N/A	TDCS TLB Tracking Fields	N/A	RW	Opaque	N/A	Shared(t) ⁴⁵	N/A	N/A
Implicit	N/A	N/A	SEPT tree	N/A	R	Opaque	N/A	Shared(t) ⁴⁶	N/A	N/A

5.4.79.5. Completion Status Codes

Table 5.329: TDH.VP.ENTER Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INCONSISTENT_MSR	IA32_TSC_ADJUST MSR value is different than the value sample by TDH.SYS.INIT.
TDX_INCORRECT_MSR_VALUE	
TDX_L2_EXIT_HOST_ROUTED_ASYNC	
TDX_L2_EXIT_HOST_ROUTED_TDVMCALL	
TDX_NON_RECOVERABLE_TD	TDH.VP.ENTER launched or resumed TD VCPU operation (TDX non-root mode) – followed later by a TD exit. The TD state is non-recoverable – further TD entry is prohibited. Exit reason is in RAX bits 31:0.

⁴⁴ TDVPS, TDR, TDCS and TDCS.OP_STATE are locked (in Shared mode) for the whole duration of running in TDX non-root mode; the locks are released on TD exit.

⁴⁵ Locking of OP_STATE and the TLB tracking fields is temporary; the locks are released before VM entry into the TD VCPU.

⁴⁶ Locking of SEPT tree is temporary; the lock is released before VM entry into the TD VCPU. Earlier releases of the TDX Module, which didn't support Non-Blocking Export, locked the SEPT tree in an Exclusive mode.

Completion Status Code	Description
TDX_NON_RECOVERABLE_VCPU	TDH.VP.ENTER launched or resumed TD VCPU operation (TDX non-root mode) – followed later by a TD exit. The TD VCPU state is non-recoverable – further TD entry to this VCPU is prohibited. Exit reason is in RAX bits 31:0.
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation. Note the special case where the indicated operand is TLB_EPOCH. This may happen due to a conflict with TDH.MEM.TRACK or TDH.EXPORT.PAUSE. The host VMM may retry TDH.VP.ENTER. Another special case is where the indicated operand is SEPT_TREE. In some cases, TDH.VP.ENTER may acquire exclusive access on the SEPT tree for a short period of time and may fail due to a concurrent operation. The host VMM should retry TDH.VP.ENTER.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.VP.ENTER launched or resumed TD VCPU operation (TDX non-root mode) – followed later by a TD exit. Exit reason is in RAX bits 31:0.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCX_NUM_INCORRECT	
TDX_TSC_ROLLBACK	
TDX_VCPU_ASSOCIATED	
TDX_VCPU_STATE_INCORRECT	

5.4.80. TDH.VP.FLUSH Leaf

Flush the address translation caches and cached TD VMCS associated with a TD VCPU on the current logical processor.

5.4.80.1. Input Operands**Table 5.330: TDH.VP.FLUSH Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 18
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a TDVPR page (HKID bits must be 0)		

5.4.80.2. Output Operands**Table 5.331: TDH.VP.FLUSH Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.80.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDH.VP.FLUSH flushes the address translation caches and cached TD VMCS associated with a TD VCPU on the current LP. It then marks the VCPU as not associated with any LP.

5.4.80.4. Operands Information

- To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.332: TDH.VP.FLUSH Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDVPR page	TDVPS	RW	Opaque	4KB	Exclusive	Shared	Shared
Implicit	N/A	HPA	TDR page	TDR	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A

5.4.80.5. Completion Status Codes**Table 5.333: TDH.VP.FLUSH Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_LIFECYCLE_STATE_INCORRECT	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.VP.FLUSH is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCX_NUM_INCORRECT	
TDX_VCPU_NOT_ASSOCIATED	

5.4.81. TDH.VP.INIT Leaf

Initialize the saved state of a TD VCPU.

5.4.81.1. Input Operands**Table 5.334: TDH.VP.INIT Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 22
	23:16	Version Number	Selects the SEAMCALL interface function version May be 0 or 1 (see the enumeration note below)
	63:24	Reserved	Must be 0
RCX	The physical address of a TDVPR page (HKID bits must be 0)		
RDX	Initial value of the guest TD VCPU RCX		
R8	If the version number provided in RAX[23:16] is 0, R8 is ignored. Else, R8 provides the following information:		
	Bits	Field	Description
	31:0	X2APIC_ID	VCPU's virtual x2APIC ID Must be unique across all VCPUs of the current TD.
	63:32	Reserved	Must be 0

5.4.81.2. Output Operands**Table 5.335: TDH.VP.INIT Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
Other	Unmodified

5.4.81.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.81.3.1. Overview

TDH.VP.INIT initializes the saved state of a VCPU in the TDVPR and TDPX pages.

5.4.81.3.2. Enumeration

TDH.VP.INIT's support of version 1 or higher is enumerated by TDX_FEATURES0.TOPOLOGY_ENUM (bit 20), readable by TDH.SYS.RD* (see 3.3.3.1), being set to 1. If not supported, calling TDH.VP.INIT with a version number higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

5.4.81.3.3. Leaf Function Latency

TDH.VP.INIT execution time may be longer than most TDX Module interface functions execution time. No interrupts (including NMI and SMI) are processed by the logical processor during that time.

5.4.81.3.4. VCPU Association

- 5 TDH.VP.INIT associates the target TD VCPU with the current LP – for details, see the [TDX Module Base Spec].

5.4.81.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.336: TDH.VP.INIT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDVPR page	TDVPS	RW	Opaque	4KB	Exclusive(h)	Shared	Shared
Implicit	N/A	HPA	TDR page	TDR	R	Opaque	4KB	Exclusive(h)/ Shared(h) ⁴⁷	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	4KB	Exclusive(i)/ Shared(i) ⁴⁷	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Exclusive(i)/ Shared(h) ⁴⁸	N/A	N/A

10

5.4.81.5. Completion Status Codes

Table 5.337: TDH.VP.INIT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_MAX_VCPUS_EXCEEDED	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	

⁴⁷ For backward compatibility, if TDH.VP.INIT is called with version == 0, then TDR is acquired in shared mode. Else, TDR is acquired in exclusive mode. TDCS is implicitly acquired with the same concurrency mode as TDR.

⁴⁸ If TDH.VP.INIT is called with version == 0, then TDCS.OP_STATE is acquired in shared mode. Else, TDCS.OP_STATE is implicitly acquired in exclusive mode, since TDR (and thus the whole TD) is acquired in exclusive mode.

Completion Status Code	Description
TDX_SUCCESS	TDH.VP.INIT is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCX_NUM_INCORRECT	
TDX_VCPU_ASSOCIATED	
TDX_VCPU_STATE_INCORRECT	
TDX_X2APIC_ID_NOT_UNIQUE	

5.4.82. TDH.VP.RD Leaf

Read a VCPU-scope metadata fields (control structure field) of a TD.

5.4.82.1. Input Operands

Table 5.338: TDH.VP.RD Input Operands Definition

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 26
	23:16	Version Number	Selects the SEAMCALL interface function version Version number may be 0 or 1. See the enumeration details below.
	63:24	Reserved	Must be 0
RCX	The physical address of a TDVPR page (HKID bits must be 0)		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. For TDH.VP.RD version 1 or higher, a value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		

5.4.82.2. Output Operands

Table 5.339: TDH.VP.RD Output Operands Definition

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
RDX	For TDH.VP.RD version 0, RDX is unmodified. For TDH.VP.RD version 1 or higher: If the input field identifier was -1, RDX returns the first readable field identifier. Else, in case of an error, RDX returns -1. On success, RDX returns the next readable field identifier. A value of -1 indicates no next field identifier is available.
R8	Field content In case of no success, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.4.82.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.82.3.1. Overview

TDH.VP.RD reads a TDVPS field, given its field code. Reading is subject to the field's readability (per the TD's ATTRIBUTES.DEBUG bit).

If version 1 or higher is specified in RAX, RDX returns the next host-side readable field identifier. This may be used by the host VMM to dump the host readable VCPU metadata. To read all the available fields, the host VMM can invoke TDH.VP.RD in a loop, starting with field identifier -1 as an input, until RDX returns -1. A status code of TDX_METADATA_FIELD_SKIP indicates that the returned value is not applicable.

5.4.82.3.2. Enumeration

Availability of TDH.VP.RD version 1 is enumerated by TDX_FEATURES0.ENHANCED_METADATA (bit 3), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDH.VP.RD with a version number higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

5.4.82.3.3. VCPU Association

TDH.VP.RD associates the target TD VCPU with the current LP. This requires that the VCPU will not be associated with another LP – for details, see the [TDX Module Base Spec].

5.4.82.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.340: TDH.VP.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDVPR page	TDVPS	RW	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	HPA	TDR page	TDR	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A

5.4.82.5. Completion Status Codes

Table 5.341: TDH.VP.RD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_METADATA_FIRST_FIELD_ID_IN_CONTEXT	Indicates that the first field ID in context is returned
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.VP.RD is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCX_NUM_INCORRECT	
TDX_VCPU_ASSOCIATED	
TDX_VCPU_STATE_INCORRECT	

5.4.83. TDH.VP.WR Leaf

Write a VCPU-scope metadata field (control structure field) of a TD.

5.4.83.1. Input Operands**Table 5.342: TDH.VP.WR Input Operands Definition**

Operand	Description		
RAX	SEAMCALL instruction leaf number and version, see 5.4.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the SEAMCALL interface function: 43
	23:16	Version Number	Selects the SEAMCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	The physical address of a TDVPR page (HKID bits must be 0)		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored.		
R8	64b value to write to the field		
R9	A 64b write mask to indicate which bits of the value in R8 are to be written to the field		

5.4.83.2. Output Operands**Table 5.343: TDH.VP.WR Output Operands Definition**

Operand	Description
RAX	SEAMCALL instruction return code – see 5.4.1
R8	Previous content of the field In case of an error, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.4.83.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.4.83.3.1. Overview

TDH.VP.WR writes a TDVPS field, given its field code. The value (R8) is written as specified by the write mask (R9). Writing is subject to the field's internal write mask (per the TD's ATTRIBUTES.DEBUG bit). Writing of specific fields is also subject to additional rules as detailed in 4.2.

Table 5.344: Metadata Field Write Rules

Write Mask Bit in R9	Internal Write Mask Bit	Value Bit in R8
0	N/A	Silently ignored
1	0	Must be the same as the current field's bit
1	1	Written to the current field's bit

TDH.VP.WR returns the previous content of the field masked by the field's readability (per the TD's ATTRIBUTES.DEBUG bit).

- 5 If the TD is both debuggable (ATTRIBUTES.DEBUG is 1) and migratable (ATTRIBUTES.MIGRATABLE is 1), TDH.VP.WR behaves as if the TD is not debuggable.

5.4.83.3.2. VCPU Association

TDH.VP.WR associates the target TD VCPU with the current LP. This requires that the VCPU will not be associated with another LP – for details, see the [TDX Module Base Spec].

10 5.4.83.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.345: TDH.VP.WR Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	TDVPR page	TDVPS	RW	Opaque	4KB	Shared	Shared	Shared
Implicit	N/A	HPA	TDR page	TDR	R	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	N/A	N/A
Implicit	N/A	N/A	TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared	N/A	N/A

15 5.4.83.5. Completion Status Codes

Table 5.346: TDH.VP.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_NOT_WRITABLE	
TDX_METADATA_FIELD_VALUE_NOT_VALID	
TDX_METADATA_WR_MASK_NOT_VALID	
TDX_OP_STATE_INCORRECT	
TDX_OPERAND_ADDR_RANGE_ERROR	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	

Completion Status Code	Description
TDX_OPERAND_PAGE_METADATA_INCORRECT	
TDX_PAGE_METADATA_INCORRECT	
TDX_SUCCESS	TDH.VP.WR is successful.
TDX_SYS_NOT_READY	
TDX_SYS_SHUTDOWN	
TDX_TD_FATAL	
TDX_TD_KEYS_NOT_CONFIGURED	
TDX_TD_VMCS_FIELD_NOT_INITIALIZED	
TDX_TDCS_NOT_ALLOCATED	
TDX_TDCX_NUM_INCORRECT	
TDX_TDVPS_FIELD_NOT_WRITABLE	
TDX_VCPU_ASSOCIATED	
TDX_VCPU_STATE_INCORRECT	
TDX_TD_VMCS_FIELD_NOT_INITIALIZED	

5.5. Guest-Side (TDCALL) Interface Functions

The TDCALL instruction causes a VM exit to the Intel TDX Module. It is used to call guest-side Intel TDX functions, either local or a TD exit to the host VMM, as selected by RAX.

5.5.1. TDCALL Instruction (Common)

- 5 This section describes the common functionality of TDCALL. Leaf functions are described in the following sections. As used by the Intel TDX Module, TDCALL is allowed only in 64b mode.

5.5.1.1. Input Operands

Table 5.347: TDCALL Input Operands Definition

Operand	Description		
RAX	Leaf and version numbers, as defined in the [TDX Module Base Spec]. See Table 5.349 below for TDCALL leaf numbers.		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function
	23:16	Version Number	Selects the TDCALL interface function version
	63:24	Reserved	Must be 0
Other	See individual TDCALL leaf functions.		

5.5.1.2. Output Operands

Table 5.348: TDCALL Output Operands Definition

Operand	Description
RAX	Instruction return code, indicating the outcome of execution of the instruction – see the [TDX Module Base Spec] for details.
Other	See individual TDCALL leaf functions.

5.5.1.3. Instruction Description

- 15 **Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

This section describes how TDCALL leaf functions are implemented by the Intel TDX Module.

The TDCALL instruction itself is specified in the [TDX Arch Extensions Spec]. There are multiple cases where TDCALL may fail. Failures may result in an exception (#UD, #GP(0)). Failure cases include, among others, the following:

- CPU mode is incorrect
- Privilege level is not 0

TDCALL results in a VM exit to the TDX Module. On VM exit, the Intel TDX Module performs the following checks:

1. If the CPU mode is not 64b ((IA32_EFER.LMA == 1) && (CS.L == 1)), the Intel TDX Module injects a #GP(0) fault into the guest TD.
2. If the leaf number in RAX is not supported by the Intel TDX Module, it returns a TDX_OPERAND_INVALID(0) status code in RAX.

If all checks pass, the Intel TDX Module calls the leaf function according to the leaf number in RAX – see the following sections for individual leaf function details.

5.5.1.4. TDCALL Leaf Numbers

The table below summarizes the guest-side interface functions leaf numbers. Note the following:

- For support of specific interface functions by specific TDX Module releases, see the detailed description of each function.
- TDX Connect interface function leaf numbers are defined in the [TDX Connect ABI Spec].

Table 5.349: TDCALL Instruction Leaf Numbers Definition

Leaf #	Interface Function Name	Description
0	TDG.VP.VMCALL	Call a host VM service
1	TDG.VP.INFO	Get TD execution environment information
2	TDG.MR.RTMR.EXTEND	Extend a TD run-time measurement register
3	TDG.VP.VEINFO.GET	Get Virtualization Exception Information for the recent #VE exception
4	TDG.MR.REPORT	Creates a cryptographic report of the TD
5	TDG.VP.CPUIDVE.SET	Control delivery of #VE on CPUID instruction execution
6	TDG.MEM.PAGE.ACCEPT	Accept a pending private page into the TD
7	TDG.VM.RD	Read a TD-scope metadata field
8	TDG.VM.WR	Write a TD-scope metadata field
9	TDG.VP.RD	Read a VCPU-scope metadata field
10	TDG.VP.WR	Write a VCPU-scope metadata field
11	TDG.SYS.RD	Read a TDX Module global-scope metadata field
12	TDG.SYS.RDALL	Read all guest-readable TDX Module global-scope metadata fields
13	TDG.SYS.RDM	Read multiple TDX Module global-scope metadata fields
14	TDG.VM.RDM	Read multiple TD-scope metadata fields
15	TDG.VM.WRM	Write multiple TD-scope metadata fields
16	TDG.VP.RDM	Read multiple VCPU-scope metadata fields
17	TDG.VP.WRM	Write multiple VCPU-scope metadata fields
18	TDG.SERVTD.RD	Read a target TD metadata field
19	TDG.SERVTD.RDM	Read multiple target TD metadata fields
20	TDG.SERVTD.WR	Write a target TD metadata field
21	TDG.SERVTD.WRM	Write multiple target TD metadata fields
22	TDG.MR.VERIFYREPORT	Verify a cryptographic report of a TD, generated on the current platform
23	TDG.MEM.PAGE.ATTR.RD	Read the GPA mapping and attributes of a TD private page
24	TDG.MEM.PAGE.ATTR.WR	Write the attributes of a private page
25	TDG.VP.ENTER	Enter L2 VCPU operation
26	TDG.VP.INVEPT	Invalidate cached EPT translations for selected L2 VMs
27	TDG.VP.INVGLA	Invalidate cached translations for selected pages in an L2 VM
28	TDG.MR.ASSIGNSVNS	Assign SVN values given TDSIGSTRUCTS and reference TD measurement values
29	TDG.MR.KEY.GET	Get a persistent key, customized to the TD's measurements and policy
30	TDG.MEM.PAGE.RELEASE	Release a private page, enabling the host VMM to remove it

5.5.1.5. Completion Status Codes

Table 5.350: TDCALL Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_SUCCESS	TDCALL is successful.
TDX_OPERAND_INVALID	Invalid leaf number
Other	See individual leaf functions

5.5.2. TDG.INTR.POST

Unreleased Feature: This section is related to Enhanced Interrupt Virtualization, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

- 5 This function is used by L1 to post a virtual interrupt to an arbitrary VCPU of an L2 VM.

5.5.2.1. Input Operands

Table 5.351: TDG.INTR.POST Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	TDCALL instruction leaf number and version, see 5.4.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the TDCALL interface function: 32
		23:16	Version Number	Selects the TDCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	VM_FLAGS	VM identifier and flags		
		Bits	Name	Description
		51:0	Reserved	Reserved: must be 0
		53:52	VM	L2 virtual machine index (must be 1 or higher)
		63:54	Reserved	Reserved: must be 0
RDX	DESTINATION_INDEX	Index in the destination L2 VM's PIDPT Value must be lower than the number of entries in that PIDPT.		
R8	VECTOR	The vector of the interrupt to be posted VECTOR's value must be between 31 and 255.		

5.5.2.2. Output Operands

10

Table 5.352: TDG.INTR.POST Output Operands Definition

Operand		Description
RAX	Status	TDCALL instruction return code
Other		Unmodified

5.5.2.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.2.3.1. Overview

15

TDG.INTR.POST, called by L1, posts a virtual inter-processor interrupt to requested L2 VM VCPU.

IPI must have been properly configured to that L2 VM. See the [Interrupt Virtualization Spec] chapter titled "Guest TD's L1 Operation as a VMM of L2 VMs" for details.

5.5.2.3.2. Enumeration

Support of TDG.INTR.POST is enumerated by TDX_FEATURES0.ENHANCED_INTR_VIRTUALIZATION (bit 45), readable by TDG.SYS.RD*.

5.5.2.3.3. Non-Running Destination VCPU Case

- 5 If TDG.INTR.POST detects that the destination VCPU is not currently running, it causes a TD exit, indicating an TDX_IPI_REQUEST. The host VMM can schedule the destination VCPU, which will handle the IPI on TD entry. See the description of TDH.VP.ENTER for details.

From the calling L1 perspective, this case behaves as a successful completion of TDG.INTR.POST. When the host VMM resumes the TD (TDH.VP.ENTER), L1 sees a TDX_SUCCESS status in RAX.

10 5.5.2.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.353: TDG.INTR.POST Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	R	Opaque	N/A	Shared(i)

15 5.5.2.5. Completion Status Codes

Table 5.354: TDG.INTR.POST Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.INTR.POST is successful.
Unreleased Feature: This list is not comprehensive	

5.5.3. TDG.MEM.PAGE.ACCEPT Leaf

Accept a pending private page and initialize it to all-0 using the TD ephemeral private key.

5.5.3.1. Input Operands

Table 5.355: TDG.MEM.PAGE.ACCEPT Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 6
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	EPT mapping information:		
	Bits	Name	Description
	2:0	Level	Level of the Secure EPT leaf entry that maps the private page to be accepted: either 0 (4KB) or 1 (2MB) – see 3.6.1.
	11:3	Reserved	Reserved: must be 0
	51:12	GPA	Bits 51:12 of the guest physical address of the private page to be accepted
	63:52	Reserved	Reserved: must be 0

5.5.3.2. Output Operands

Table 5.356: TDG.MEM.PAGE.ACCEPT Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
Other	Unmodified

5.5.3.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.3.3.1. Overview

TDG.MEM.PAGE.ACCEPT accepts a pending private page, previously added by TDH.MEM.PAGE.AUG or released by TDG.MEM.PAGE.RELEASE, into the TD. It initializes the page to 0. If page attributes have been set by the guest TD, using TDG.MEM.PAGE.ATTR.WR, while the page was pending, they become effective when the page is accepted.

5.5.3.3.2. SEPT Mapping Size Considerations

In most cases, the guest TD is unaware of how TD private pages are mapped by the host VMM in SEPT. However, TDG.MEM.PAGE.ACCEPT operation specifies a page mapping size and may fail if the specified size is different than the actual mapping size.

- If the page is mapped at a lower level than requested, the function returns TDX_PAGE_SIZE_MISMATCH. The guest may re-invoke TDG.MEM.PAGE.ACCEPT specifying a 4KB page size.
- If the page is mapped at a higher level than requested, this results in an EPT violation TD exit, with extended exit qualification indicating the error SEPT entry level and state, and the guest-requested mapping level. The host VMM is expected to demote the page, then re-enter the guest TD so TDG.MEM.PAGE.ACCEPT is re-invoked.

5.5.3.3.3. Other Conditions that Prevent Page Acceptance

- If the page has already been accepted, the function returns TDX_PAGE_ALREADY_ACCEPTED.
- If the page is not PENDING nor PENDING_EXPORTED_DIRTY, this results in an EPT violation TD exit, with extended exit qualification indicating the error SEPT entry level and state, and the guest-requested accept level.

5.5.3.3.4. Interruptibility

If, during its execution, TDG.MEM.PAGE.ACCEPT detects that an external interrupt is pending, it may resume the guest TD with the CPU state unmodified. The progress so far is recorded in the page's Secure EPT entry. This allows the external interrupt to be recognized, causing a TD exit or a posted interrupt delivery. Typically, TDG.MEM.PAGE.ACCEPT will be re-invoked and continue its work.

Guest TD software is not directly involved. Guest TD should not precede the TDCALL with an STI instruction or a MOV to SS instruction. Posted interrupts may be delivered when the TDCALL flow is interrupted.

5.5.3.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.357 TDG.MEM.PAGE.ACCEPT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	TD private page	Blob	RW	Private	2 ^{12+9*Level} Bytes	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	RW	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	Secure EPT tree	N/A	RW	Private	N/A	None
Implicit	N/A	GPA	Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)

5.5.3.5. Completion Status Codes

Table 5.358: TDG.MEM.PAGE.ACCEPT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation. Specifically, it may indicate that a concurrent TDG.MEM.PAGE.ACCEPT is using the same Secure EPT entry

Completion Status Code	Description
TDX_PAGE_ALREADY_ACCEPTED	
TDX_PAGE_SIZE_MISMATCH	Requested page size is 2MB, but the page GPA is not mapped at 2MB size
TDX_SUCCESS	TDG.MEM.PAGE.ACCEPT is successful.

5.5.4. TDG.MEM.PAGE.ATTR.RD Leaf

Read the GPA mapping and attributes of a TD private page or a private MMIO page⁴⁹.

5.5.4.1. Input Operands

Table 5.359: TDG.MEM.PAGE.ATTR.RD Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	TDCALL instruction leaf number and version, see 5.5.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the TDCALL interface function: 23
		23:16	Version Number	Selects the TDCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	GPA	Guest physical address		

5

5.5.4.2. Output Operands

Table 5.360: TDG.MEM.PAGE.ATTR.RD Output Operands Definition

Operand	Name	Description		
RAX	STATUS	TDCALL instruction return code – see 5.5.1		
RCX	GPA_MAPPING	Actual GPA mapping of the page:		
		Bits	Name	Description
		2:0	LEVEL	Level of the Secure EPT leaf entry that maps the private page: either 0 (4KB), 1 (2MB) or 2 (1GB) – see 3.6.1.
		11:3	RESERVED	Reserved: set to 0
		51:12	GPA	Bits 51:12 of the guest physical start address of the private page Depending on the level, the following least significant bits are always 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12
		60:52	RESERVED	Reserved: set to 0
		61	MMIO	Flags that the page is MMIO
		62	PENDING	Flags that the page is PENDING This is applicable to all PENDING states; if the TDX Module supports TDX Connect, it is also applicable to MMIO_PENDING pages.

⁴⁹ Applicable only if the TDX Module supports TDX Connect.

Operand	Name	Description		
		63	RESERVED	Reserved: set to 0
RDX	GPA_ATTR	Guest-visible page attributes. See the GPA_ATTR definition in 3.6.3.		
Other		Unmodified		

5.5.4.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.4.3.1. Overview

TDH.MEM.PAGE.ATTR.RD reads the GPA mapping and attributes of a TD private page. Given a GPA (which can be anywhere within a page) it returns the actual mapping level – either 0 (4KB), 1 (2MB) or 2 (1GB) – and the guest-readable attributes. TDH.MEM.PAGE.ATTR.RD can read the attributes of a PENDING page.

GPA mapping level is exposed to the guest TD since page acceptance (TDH.MEM.PAGE.ACCEPT) and page attributes modifications and L2 page aliases management (TDH.MEM.PAGE.ATTR.WR) are done at mapping granularity.

5.5.4.3.2. Enumeration

Availability of TDG.MEM.PAGE.ATTR.RD is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.MEM.PAGE.ATTR.RD returns a TDX_OPERAND_INVALID(RAX) status.

Support of TDX Connect is enumerated by TDX_FEATURES0.TDX_CONNECT (bit 6) and TDX_FEATURES0.TDX_CONNECT_PARTITIONING (bit 32).

5.5.4.3.3. EPT Violation

If the requested GPA is not guest-readable and not pending acceptance, TDH.MEM.PAGE.ATTR.RD causes an EPT violation TD exit.

5.5.4.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.361 TDG.MEM.PAGE.ATTR.RD Memory Operands Information Definition

Explicit/ Implicit	Reg.	Addr. Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	TD private page	Blob	RW	Private	None	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	Secure EPT tree	N/A	R	Private	N/A	None
Implicit	N/A	N/A	L2 Secure EPT trees	N/A	RW	Private	N/A	None
Implicit	N/A	GPA	Secure EPT entry	SEPT Entry	R	Private	N/A	Exclusive(h)
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)

5.5.4.5. Completion Status Codes

Table 5.362: TDG.MEM.PAGE.ATTR.RD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.MEM.PAGE.ATTR.RD is successful.

5.5.5. TDG.MEM.PAGE.ATTR.WR Leaf

Write the attributes of a private page or a private MMIO page⁵⁰. Create or remove L2 page aliases as required.

5.5.5.1. Input Operands

Table 5.363: TDG.MEM.PAGE.ATTR.WR Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	TDCALL instruction leaf number and version, see 5.5.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the TDCALL interface function: 24
		23:16	Version Number	Selects the TDCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	GPA_MAPPING	GPA mapping information:		
		Bits	Name	Description
		2:0	LEVEL	Level of the Secure EPT leaf entry that maps the private page: either 0 (4KB), 1 (2MB) or 2 (1GB) – see 3.6.1.
		11:3	RESERVED	Reserved: must be 0
		51:12	GPA	Bits 51:12 of the guest physical address of the private page Depending on the level, the following least significant bits must be 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12
		63:52	RESERVED	Reserved: must be 0
RDX	GPA_ATTR	Guest-visible page attributes. See the GPA_ATTR definition in 3.6.3. To avoid writing the attributes of a certain VM, all 16 attribute bits (GPA_ATTR_SINGLE_VM) for that VM should be set to 0. Attribute bits for non-existent VMs must be 0.		
R8	ATTR_FLAGS	Attributes masks and invalidate EPT flags		
		Bits	Field	Description
		15:0	RESERVED	Must be 0
		30:16	ATTR_MASK1	A bit value of 1 indicates that the applicable attributes bit is to be written. Otherwise, the attributes bit is unmodified. Must be 0 if the TD has no VM #1.
		31	INVEPT1	Invalidate EPT for L2 VM #1 Must be 0 if the TD has no VM #1.

⁵⁰ Applicable only if the TDX Module supports TDX Connect.

Operand	Name	Description		
		46:32	ATTR_MASK2	A bit value of 1 indicates that the applicable attributes bit is to be written. Otherwise, the attributes bit is unmodified. Must be 0 if the TD has no VM #2.
		47	INVEPT2	Invalidate EPT for L2 VM #2 Must be 0 if the TD has no VM #2.
		62:48	ATTR_MASK3	A bit value of 1 indicates that the applicable attributes bit is to be written. Otherwise, the attributes bit is unmodified. Must be 0 if the TD has no VM #3.
		63	INVEPT3	Invalidate EPT for L2 VM #3 Must be 0 if the TD has no VM #3.

5.5.5.2. Output Operands

Table 5.364: TDG.MEM.PAGE.ATTR.WR Output Operands Definition

Operand	Name	Description		
RAX	STATUS	TDCALL instruction return code – see 5.5.1		
RCX	GPA_MAPPING	GPA mapping of the page:		
		Bits	Name	Description
		2:0	LEVEL	The requested level of the Secure EPT leaf entry that maps the private page: either 0 (4KB), 1 (2MB) or 2 (1GB) – see 3.6.1. If the returned STATUS is TDX_PAGE_SIZE_MISMATCH, the actual level is lower than the requested one.
		11:3	RESERVED	Reserved: set to 0
		51:12	GPA	Bits 51:12 of the requested guest physical start address of the private page Depending on LEVEL, the following least significant bits are always 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12
		60:52	RESERVED	Reserved: set to 0
		61	MMIO	Flags that the page is MMIO This bit is only applicable if TDX Module supports TDX Connect, and the returned STATUS is TDX_SUCCESS.
		62	PENDING	Flags that the page is PENDING This is applicable to all PENDING states; if the TDX Module supports TDX Connect, it is also applicable to MMIO_PENDING pages. This bit is only applicable if the returned STATUS is TDX_SUCCESS.

Operand	Name	Description		
		63	RESERVED	Reserved: set to 0
RDX	GPA_ATTR	On success, if the attribute bits (GPA_ATTR_SINGLE_VM) for a specific VM were 0 on input, they remain unmodified. For other VMs, RDX returns the updated guest-visible page attributes. In case of an error, RDX returns the current value of page attributes when possible. If the current attributes for a certain VM have not been read, that VM's attributes VALID bit returns 0. See the GPA_ATTR definition in 3.6.3.		
Other		Unmodified		

5.5.5.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.5.3.1. Overview

TDH.MEM.PAGE.ATTR.WR writes the specified set of attributes of a TD private page, including L2 page alias attributes. Only the bits selected by the attributes mask are updated. The private page can be either writable by the TD (MAPPED or EXPORTED_DIRTY) or pending acceptance (PENDING or PENDING_EXPORTED_DIRTY). If the page is pending acceptance, the written attributes will become effective when the page is later accepted by the guest TD, using TDG.MEM.PAGE.ACCEPT.

TDH.MEM.PAGE.ATTR.WR ignores any VM's GPA attributes set whose VALID bit is 0.

TDH.MEM.PAGE.ATTR.WR creates or removes L2 page aliases as required:

- If any of the requested L2 attributes VALID bit is set, and the R, W, Xs, Xu and PWA bits combination has a legal, non-0 value, then if the L2 page alias does not exist, it is created. The rules for checking the legal combination of attributes bits are described in 3.6.3.1.
- If any of the requested L2 attributes VALID bit is set, and the R, W, Xs, Xu and PWA bits are all 0, then if the L2 page alias exists, it is removed.

Note: For the above operations, the Xu and PWA bits are always considered, regardless of the L2 VMCS setting of the "mode-based execute control for EPT" (MBEC) and "EPT paging-write control" VM-execution controls.

5.5.5.3.2. Enumeration

Availability of TDG.MEM.PAGE.ATTR.WR is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.MEM.PAGE.ATTR.WR returns a TDX_OPERAND_INVALID(RAX) status.

Support of TDX Connect is enumerated by TDX_FEATURES0.TDX_CONNECT (bit 6) and TDX_FEATURES0.TDX_CONNECT_PARTITIONING (bit 32).

5.5.5.3.3. SEPT Mapping Size Considerations

In most cases, the guest TD is unaware of how TD private pages are mapped by the host VMM in SEPT. However, TDG.MEM.PAGE.ATTR.WR operation specifies a page mapping size and may fail if the specified size is different than the actual mapping size.

- If the page is mapped at a lower level than requested, the function returns TDX_PAGE_SIZE_MISMATCH. The guest may re-invoke TDG.MEM.PAGE.ATTR.WR specifying the actual mapping size as returned in RCX.
- If the page is mapped at a higher level than requested, this results in an EPT violation TD exit, with extended exit qualification indicating the error SEPT entry level and state, and the guest-requested mapping level. The host VMM is expected to demote the page, then re-enter the guest TD so TDG.MEM.PAGE.ATTR.WR is re-invoked.

5.5.5.3.4. Other Conditions that Prevent Page Attributes Modifications

- If the page is not guest-writable and is not pending, this results in an EPT violation TD exit, indicating a failed write operation.
- If an L2 SEPT walk fails, meaning there's a missing non-leaf L2 SEPT page, the operation depends on the setting of the host writable TDCS field VM_CTL5, which is an array of 4 bitmaps, one per VM (only L2 VMs are applicable). Bit 0 controls the operation on L2 SEPT walk fails in TDCALL flows:
 - The default value of 0 means that a TDX_L2_SEPT_WALK_FAILED status is returned to the L1 VMM.
 - If the value is 1, the TDX Module does an EPT violation TD exit, indicating a failed write operation exit, with extended exit qualification indicating the error L2 SEPT level and VM index. The host VMM may then add the missing L2 SEPT page using TDH.MEM.SEPT.ADD.

In any of the above cases, the page attributes are not modified.

5.5.5.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.365 TDG.MEM.PAGE.ATTR.WR Memory Operands Information Definition

Explicit/ Implicit	Reg.	Addr. Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	TD private page	Blob	RW	Private	2 ^{12+9*Level} Bytes	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	L1 Secure EPT tree	N/A	R	Private	N/A	None
Implicit	N/A	N/A	L2 Secure EPT trees	N/A	RW	Private	N/A	None
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)

5.5.5.5. Completion Status Codes

Table 5.366: TDG.MEM.PAGE.ATTR.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_OPERAND_BUSY	
TDX_PAGE_ATTR_INVALID	The combination of page attributes to be set, after considering the requested attributes, the requested attributes mask and the current page attributes, is invalid.
TDX_PAGE_SIZE_MISMATCH	Requested page size does not match its GPA mapping size
TDX_SUCCESS	TDG.MEM.PAGE.ATTR.WR is successful.

5.5.6. TDG.MEM.PAGE.RELEASE Leaf

Release a private page, enabling the host VMM to remove it.

5.5.6.1. Input Operands

Table 5.367: TDG.MEM.PAGE.RELEASE Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	TDCALL instruction leaf number and version, see 5.5.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the TDCALL interface function: 30
		23:16	Version Number	Selects the TDCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	GPA_MAPPING	GPA mapping information:		
		Bits	Name	Description
		2:0	LEVEL	Level of the Secure EPT leaf entry that maps the private page: either 0 (4KB), 1 (2MB) or 2 (1GB) – see 3.6.1.
		11:3	RESERVED	Reserved: must be 0
		51:12	GPA	Bits 51:12 of the guest physical address of the private page Depending on the level, the following least significant bits must be 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12
		63:52	RESERVED	Reserved: must be 0

5

5.5.6.2. Output Operands

Table 5.368: TDG.MEM.PAGE.RELEASE Output Operands Definition

Operand	Name	Description		
RAX	STATUS	TDCALL instruction return code –see 5.5.1		
RCX	GPA_MAPPING	GPA mapping of the page:		
		Bits	Name	Description
		2:0	LEVEL	The requested level of the Secure EPT leaf entry that maps the private page: either 0 (4KB), 1 (2MB) or 2 (1GB) – see 3.6.1. If the returned STATUS is TDX_PAGE_SIZE_MISMATCH, the actual level is lower than the requested one.
		11:3	RESERVED	Reserved: set to 0

Operand	Name	Description		
		51:12	GPA	Bits 51:12 of the guest physical start address of the private page Depending on LEVEL, the following least significant bits are always 0: Level 0 (EPTE): None Level 1 (EPDE): Bits 20:12 Level 2 (EPDPTE): Bits 29:12
		60:52	RESERVED	Reserved: set to 0
		61	MMIO	Flags that the page is MMIO This bit is only applicable if TDX Module supports TDX Connect, and the returned STATUS is either TDX_SUCCESS or TDX_EPT_STATE_INCORRECT.
		62	PENDING	Flags that the page is PENDING This is applicable to all PENDING states; if the TDX Module supports TDX Connect, it is also applicable to MMIO_PENDING pages. This bit is only applicable if the returned STATUS is either TDX_SUCCESS or TDX_EPT_STATE_INCORRECT.
		63	RESERVED	Reserved: set to 0
Other		Unmodified		

5.5.6.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5 5.5.6.3.1. Overview

TDG.MEM.PAGE.RELEASE releases a TD private page and puts it in a PENDING state, allowing the host VMM to remove it even if the TD is enabled for TDX Connect. Releasing a page prevents creating new address translations to that page; to remove the released page, the host VMM must first block the page using TDH.MEM.RANGE.BLOCK and perform TLB shutdown as described in the [Base Spec].

10 5.5.6.3.2. Enumeration

TDX Module support of TDG.MEM.PAGE.RELEASE is enumerated by TDX_FEATURES0.PAGE_RELEASE (bit 38), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.MEM.PAGE.RELEASE returns a TDX_OPERAND_INVALID(RAX) status.

5.5.6.3.3. Configuration by the Host VMM

15 TDG.MEM.PAGE.RELEASE is available to the guest TD if CONFIG_FLAGS.PAGE_RELEASE is 1; this happens if the host VMM set either CONFIG_FLAGS.PAGE_RELEASE or CONFIG_FLAGS.TDX_CONNECT to 1. If not configured as available, calling TDG.MEM.PAGE.RELEASE returns a TDX_OPERAND_INVALID(RAX) status.

CONFIG_FLAGS is readable by the guest TD using TDG.VM.RD.

5.5.6.3.4. SEPT Mapping Size Considerations

In most cases, the guest TD is unaware of how TD private pages are mapped by the host VMM in SEPT. However, TDG.MEM.PAGE.RELEASE operation specifies a page mapping size and may fail if the specified size is different than the actual mapping size.

- If the page is mapped at a lower level than requested, the function returns TDX_PAGE_SIZE_MISMATCH. The guest may re-invoke TDG.MEM.PAGE.RELEASE specifying the actual mapping size as returned in RCX.
 - If the page is mapped at a higher level than requested, this results in an EPT violation TD exit, with extended exit qualification indicating the error SEPT entry level and state, and the guest-requested mapping level. The host VMM is expected to demote the page, then re-enter the guest TD so TDG.MEM.PAGE.RELEASE is re-invoked.
- Note:** 1GB pages may be released by TDG.MEM.PAGE.RELEASE. However, TDG.MEM.PAGE.ACCEPT will not be able to directly accept them. Calling TDH.MEM.PAGE.ACCEPT on 1GB pages results in an EPT violation TD exit, and the host VMM is expected to demote the page using TDH.MEM.PAGE.DEMOTE.

5.5.6.3.5. Other Conditions that Prevent Page Release

- The guest TD should not attempt to release a page that is not allocated to its GPA space. In such cases, a TDX_EPT_ENTRY_FREE status is returned.
- The guest TD should not attempt to release PENDING pages. If the page state is any of the PENDING states, a TDX_EPT_ENTRY_STATE_INCORRECT status is returned to the guest TD, and RCX.PENDING is set.
- The guest TD should not attempt to release MMIO pages. If the page state is any of the MMIO states, a TDX_EPT_ENTRY_STATE_INCORRECT status is returned to the guest TD, and RCX.MMIO is set.
- If the page is not accessible due to a host VMM operation (that the guest is TD not aware of), such as blocked by TDH.MEM.RANGE.BLOCK or write-blocked by TDH.EXPORT.BLOCKW, TDG.MEM.PAGE.RELEASE results in an EPT violation TD exit, indicating a failed write operation. The host VMM is expected to unblock the page and re-enter the TD.

5.5.6.4. Operands Information

- To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.369 TDG.MEM.PAGE.RELEASE Memory Operands Information Definition

Explicit/ Implicit	Reg.	Addr. Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	TD private page	Blob	RW	Private	$2^{12+9*\text{Level}}$ Bytes	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	L1 Secure EPT tree	N/A	R	Private	N/A	None
Implicit	N/A	N/A	L2 Secure EPT trees	N/A	RW	Private	N/A	None
Implicit	N/A	GPA	L1 Secure EPT entry	SEPT Entry	RW	Private	N/A	Exclusive(h)
Implicit	N/A	GPA	L2 Secure EPT entries	SEPT Entry	RW	Private	N/A	Exclusive(i)

5.5.6.5. Completion Status Codes

Table 5.370: TDG.MEM.PAGE.RELEASE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_EPT_ENTRY_FREE	
TDX_EPT_ENTRY_STATE_INCORRECT	

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_OPERAND_BUSY	
TDX_PAGE_PENDING	
TDX_PAGE_SIZE_MISMATCH	The requested page size does not match its GPA mapping size.
TDX_SUCCESS	TDG.MEM.PAGE.RELEASE is successful.

5.5.7. TDG.MR.ASSIGNSVNS

Unreleased Feature: This section is related to TD Signing, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

TDG.MR.ASSIGNSVNS allows a TD author to assign Product Identifiers and Security Version Numbers to TD images that they produce. These values are assigned by shipping a signed TDSIGSTRUCT containing reference values for the TD measurements, and associated SVNs. This TDSIGSTRUCT is provided to TDG.MR.ASSIGNSVNS for processing during TD startup.

5.5.7.1. Input Operands

Table 5.371: TDG.MR.ASSIGNSVNS Input Operand Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 28
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	2048B-aligned guest physical address of TDSIGSTRUCT containing the signer and SVNs for the TD.		

5.5.7.2. Output Operands

Table 5.372: TDG.MR.ASSIGNSVNS Output Operand Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
Other	Unmodified

5.5.7.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.7.3.1. Overview

TDG.MR.ASSIGNSVNS takes GPA of a signed TDSIGSTRUCT containing reference values for a subset of available TD measurements, and an associated Product ID and SVN to be assigned if those reference values match the measurements of the TD. The hash of the public key of the TDSIGSTRUCT is recorded. TDG.MR.ASSIGNSVNS can be called multiple times to process a chain of TDSIGSTRUCT similar to a certificate chain starting with the leaf. The public key of the signer of the final (or root of the chain) TDSIGSTRUCT is also recorded.

5.5.7.3.2. Enumeration

Availability of TDG.MR.ASSIGNSVNS is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.MR.ASSIGNSVNS returns a TDX_OPERAND_INVALID(RAX) status.

5.5.7.3.3. Rate Restriction

Due to the signature verification operation, TDG.MR.ASSIGNSVNS execution time may be longer than most TDX Module interface functions execution times. To avoid long latencies where, e.g., response to hardware interrupts is delayed, the rate at which the guest TD can call this interface function is limited. If the guest TD calls this function less than about

200usec from the time it has last called TDG.MR.ASSIGNSVNS from the same VCPU, the TDX Module induces a TD exit with a TDX_TDCALL_RATE_LIMIT status. This rate limit only applies if the last TDG.MR.ASSIGNSVNS actually spent time on signature verification; it does not apply to cases such as busy resources. The host VMM can then call TDH.VP.ENTER to resume the guest operation.

5 5.5.7.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.373: TDG.MR.ASSIGNSVNS Operands Information Definition

Explicit/ Implicit	Reg	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	Input	TDSIGSTRUCT	R	Private/ Shared	2048B	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Exclusive
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)

10 5.5.7.5. Completion Status Codes

Table 5.374: TDG.MR.ASSIGNSVNS Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_INVALID	Alignment or access checks failed
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_SIGSTRUCT_MISMATCH	One of the reference measurements in the TDSIGSTRUCT did not match the current measurements in the TDCS.
TDX_SUCCESS	TDG.MR.ASSIGNSVNS is successful.

5.5.8. TDG.MR.KEY.GET

Unreleased Feature: This section is related to Sealing, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

TDG.MR.KEY.GET allows a TD to request a persistent key be derived for the TD, customized to the TD's measurements and policy.

5.5.8.1. Input Operands

Table 5.375: TDG.MR.KEY.GET Input Operand Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 29
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	128B-aligned guest private physical address of TDKEYREQUEST		
RDX	32B-aligned guest private physical address for key output		

5.5.8.2. Output Operands

Table 5.376: TDG.MR.KEY.GET Output Operand Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
R9	If TDG.MR.KEY.GET completes successfully, R9 returns the key size in bits. Otherwise, R9 is unmodified.
Other	Unmodified

5.5.8.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.8.3.1. Overview

TDG.MR.KEY.GET allows a TD to request a persistent key be derived for the TD, customized to the TD's measurements and policy.

5.5.8.3.2. Hardware-Bound Sealing

The value of the key returned by TDG.MR.KEY.GET is **hardware-bound**, i.e., it is different on each platform. A key request executed on each platform will return a different key value.

By default, the host VMM should enable TDG.MR.KEY.GET, by setting TD_PARAMS.CONFIG_FLAGS.SEALING to 1, as an input to TDH.MNG.INIT. However, a guest TD that is aware of the hardware-bound nature of sealing can override the host VMM's configuration by setting TDCS.TD_CTL.S_ENABLE_HW_KEYS to 1.

5.5.8.3.3. Enumeration

Availability of TDG.MR.KEY.GET is enumerated by TDX_FEATURES0.HW_SEALING (bit 12), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.MR.KEY.GET returns a TDX_OPERAND_INVALID(RAX) status.

Supported key sizes are enumerated by TDX_FEATURES0.SEALKEY_128 (bit 56) and TDX_FEATURES0.SEALKEY_256 (bit 57).

5.5.8.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.377: TDG.MR.KEY.GET Operands Information Definition

Explicit/ Implicit	Reg	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	Input Request	TDKEYREQUEST	R	Private	128B	None
Explicit	RDX	GPA	Output Key	128-bit or 256-bit Key	RW	Private	32B	None
Implicit	N/A	N/A	TDR page	TDR	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS.RTMR	SHA384_HASH	R	Opaque	N/A	Shared
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)

5.5.8.5. Completion Status Codes

Table 5.378: TDG.MR.KEY.GET Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_MR_KEY_GET_NOT_SUPPORTED	TDG.MR.KEY.GET is not supported: the host VMM configured CONFIG_FLAGS.SEALING to 0, and the guest TD did not set TD_CTL.S_ENABLE_HW_KEYS to 1.
TDX_KEY_SIZE_INVALID	None of the requested key sizes is supported.
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.MR.ASSIGNSVNS is successful.
TDX_SVN_INVALID	SVN requested is invalid for current configuration.

5.5.9. TDG.MR.REPORT Leaf

Unreleased Feature: Some of the text in this section is related to TD Signing, a feature which has not been released yet at the time of writing of this document. Details provided below serve as a preview and are subject to change.

- 5 TDG.MR.REPORT creates a TDREPORT_STRUCT structure that contains the measurements/configuration information of the guest TD that called the function, measurements/configuration information of the Intel TDX Module and a REPORTMACSTRUCT.

5.5.9.1. Input Operands

Table 5.379: TDG.MR.REPORT Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 4
	23:16	Version Number	Selects the TDCALL interface function version May be 0 or 1 (see enumeration details below)
	63:24	Reserved	Must be 0
RCX	Guest physical address of newly created report structure. - For version 0, the buffer must be aligned on 1024B. - For version 1, the buffer must be aligned on 2048B.		
RDX	64B-aligned guest physical address of additional data to be signed		
R8	Bits	Name	Description
	7:0	REPORT_SUB_TYPE	Must be 0
	9:8	REQUESTOR	Identifies the VM which requested the report: 0: L1 (or non-partitioned TD) 1, 2, 3: L2 VM Non-0 REQUESTOR values may be specified only if the TDX Module was configured with TDID_VMID_REPORTING . See 5.4.64 and 5.4.76 for details. See enumeration details below.
	63:10	Reserved	Reserved: must be 0
R9	If the version number is 1 or higher, then R9 provides the buffer size for the newly created report structure. This size must be at least 1280 bytes (see 3.9.2). If the version number is 0, R9 is ignored, and the buffer size is implicitly 1024 bytes.		

5.5.9.2. Output Operands

Table 5.380: TDG.MR.REPORT Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1

Operand	Description
Other	Unmodified

5.5.9.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.9.3.1. Overview

This function creates a TDREPORT_STRUCT structure that contains the measurements/configuration information of the guest TD that called the function, measurements/configuration information of the Intel TDX Module and a REPORTMACSTRUCT. The REPORTMACSTRUCT is integrity-protected with a MAC, and it contains the hash of the measurements and configuration as well as additional REPORTDATA provided by the TD software.

The created TDREPORT_STRUCT version (REPORTTYPE.VERSION) is the lowest version that contains all the TD's reported information:

- If TDID256 and VMID reporting has been enabled by the ENABLE_FEATURES0.TDID_VMID_REPORTING (bit 49) input of TDH.SYS.CONFIG or TDH.SYS.UPDATE, then the version is 3.
- If supported, and the TD has been assigned with any SVNs or signers (i.e., any of the TDCS fields MRCONOFIGSVN, MROWNERCONFIGSVN, MRSIGROOT, MRSIGNER, ISVPROID, and ISVSVN are not 0), then the version is 2. Else,
- If any service TD has been bound or pre-bound (i.e., SERVTD_HASH is not 0), then the version is 1.
- Else, the version is 0.

Additional REPORTDATA, a 64-byte value, is provided by the guest TD to be included in the TDG.MR.REPORT.

If the TD's ATTRIBUTES.SERVTD_EXT is 1, TDREPORT.TDINFO.SERVTD_HASH will be populated with SERVTD_EXT_HASH rather than SERVTD_HASH.

Note: Although not enforced by TDG.MR.REPORT, the guest TD should normally place REPORTDATA in private memory to help ensure secure report generation.

5.5.9.3.2. Enumeration

Support of TDG.MR.REPORT version 1 is enumerated by TDX_FEATURES0.TD_SIGNING_AND_SVN (bit 22), readable by TDG.SYS.RD.

Support of non-0 REQUESTOR values is enumerated by TDX_FEATURES0.TDID_VMID_REPORTING (bit 49).

5.5.9.3.3. Interruptibility

If, during its execution, TDG.MR.REPORT detects that an external interrupt is pending, it may resume the guest TD with the CPU state unmodified. The progress so far is recorded internally. This allows the external interrupt to be recognized, causing a TD exit or a posted interrupt delivery. Typically, TDG.MR.REPORT will be re-invoked and continue its work.

Guest TD software is not directly involved. Guest TD should not precede the TDCALL with an STI instruction or a MOV to SS instruction. Posted interrupts may be delivered when the TDCALL flow is interrupted.

5.5.9.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.381: TDG.MR.REPORT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	Output report	TDREPORT_STRUCT	RW	Private/ Shared	Version 0: 1024B	None

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
							Version 1: 2048B	
Explicit	RDX	GPA	Input report data	REPORTDATA	R	Private/ Shared ⁵¹	64B	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Shared
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)

5.5.9.5. Completion Status Codes

Table 5.382: TDG.MR.REPORT Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_INSUFFICIENT_TDREPORT_SPACE	TDG.MR.REPORT was provided with a buffer space that is too small for the generated TDREPORT_STRUCT
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.MR.REPORT is successful.
TDX_TDG_MR_REPORT_VERSION_MISMATCH	TDG.MR.REPORT was called with a version number that doesn't allow creating a report matching the TD's configuration

⁵¹ Although not enforced by TDG.MR.REPORT, the guest TD should normally place REPORTDATA in private memory to help ensure secure report generation.

5.5.10. TDG.MR.RTMR.EXTEND Leaf

Extend a TDCS.RTMR measurement register.

5.5.10.1. Input Operands

Table 5.383: TDG.MR.RTMR.EXTEND Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 2
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	64B-aligned guest physical address of a 48B extension data buffer		
RDX	Index of the measurement register to be extended		

5.5.10.2. Output Operands

Table 5.384: TDG.MR.RTMR.EXTEND Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
Other	Unmodified

5.5.10.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDG.MR.RTMR.EXTEND extends one of the RTMR measurement registers in TDCS with the provided extension data in memory.

5.5.10.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.385 TDG.MR.RTMR.EXTEND Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	EXTEND_DATA	Blob	R	Private	64B	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Exclusive
Implicit	N/A	N/A	TDVPR page	TDVPS	None	Opaque	N/A	Shared(i)

5.5.10.5. Completion Status Codes

Table 5.386: TDG.MR.RTMR.EXTEND Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.MR.RTMR.EXTEND is successful.

5.5.11. TDG.MR.VERIFYREPORT

Verify a cryptographic REPORTMACSTRUCT that describes the contents of a TD, to determine that it was created on the current TEE on the current platform.

5.5.11.1. Input Operands

Table 5.387: TDG.MR.VERIFYREPORT Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 22
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	256B-aligned guest physical address of the REPORTMACSTRUCT to be verified.		

5.5.11.2. Output Operands

Table 5.388: TDG.MR.VERIFYREPORT Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
Other	Unmodified

5.5.11.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.11.3.1. Overview

TDG.MR.VERIFYREPORT computes a MAC over the provided REPORTMACSTRUCT structure; it then checks that the computed value is the same as the MAC field of that structure.

5.5.11.3.2. Enumeration

Availability of TDG.MR.VERIFYREPORT is enumerated by TDX_FEATURES0.LOCAL_ATTESTATION (bit 8), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.MR.VERIFYREPORT returns a TDX_OPERAND_INVALID(RAX) status.

5.5.11.3.3. Retry on Failure

As described in the [Base Spec], there can be cases where report verification fails due to, e.g., microcode update or migration of the reporting TD and the verifying TD to another platform. In such cases it is recommended that a fresh report will be generated by the reporting TD, using TDG.MR.REPORT, and that TDG.MR.VERIFYREPORT will be called again.

5.5.11.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.389: TDG.MR.VERIFYREPORT Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RCX	GPA	Input report	REPORTMACSTRUCT	R	Private	256B	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Shared
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)

5.5.11.5. Completion Status Codes**Table 5.390: TDG.MR.VERIFYREPORT Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_INVALID_CPUSVN	See the above note about retrying the operation.
TDX_INVALID_REPORTMACSTRUCT	See the above note about retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.MR.VERIFYREPORT is successful.

5

5.5.12. TDG.SERVTD.RD Leaf

As a service TD, read a metadata field (control structure field) of a target TD.

5.5.12.1. Input Operands

Table 5.391: TDG.SERVTD.RD Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 18
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Binding handle		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. A value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		
R10	Target TD's TD_UUID bits 63:0		
R11	Target TD's TD_UUID bits 127:64		
R12	Target TD's TD_UUID bits 191:128		
R13	Target TD's TD_UUID bits 255:192		

5.5.12.2. Output Operands

Table 5.392: TDG.SERVTD.RD Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
RDX	RDX returns the next readable field identifier. A value of -1 indicates no next field identifier is available. If the input field identifier was -1, RDX returns the first readable field identifier. In case of another error, RDX returns -1.
R8	Contents of the field In case of an error, as indicated by RAX, R8 returns 0.
R10	Updated target TD's TD_UUID bits 63:0 – see the description below.
R11	Updated target TD's TD_UUID bits 127:64 – see the description below.
R12	Updated target TD's TD_UUID bits 191:128 – see the description below.

Operand	Description
R13	Updated target TD's TD_UUID bits 255:192 – see the description below.
Other	Unmodified

5.5.12.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.12.3.1. Overview

TDG.SERVTD.RD reads a metadata field (control structure field) of a target TD.

RDX returns the next host-side readable field identifier. This may be used by the Service TD to dump the target TD metadata readable by the Service TD. To read all the available fields, the service TD can invoke TDG.SERVTD.RD in a loop, starting with field identifier -1 as an input, until RDX returns -1. A status code of TDX_METADATA_FIELD_SKIP indicates that the returned value is not applicable.

5.5.12.3.2. Enumeration

Availability of TDG.SERVTD.RD is enumerated by TDX_FEATURES0.SERVICE_TD (bit 2), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.SERVTD.RD returns a TDX_OPERAND_INVALID(RAX) status.

5.5.12.3.3. TD_UUID Update

TD_UUID is updated when the target TD is imported. If the service TD binding to the target TD happened before the target TD was imported, the TD_UUID provided in R13:R10 may no longer be correct. In this case, if the TD_UUID provided in R13:R10 is equal to the pre-import TD_UUID of the target TD, TDG.SERVTD.RD returns TDX_TARGET_UUID_UPDATED status in RAX, and updates R13:R10 with the imported value of TD_UUID. The caller should retry the operation with the new TD_UUID.

5.5.12.3.4. Cross-TD Traps

Failure to access the metadata of the target TD may result in a cross-TD trap TD exit to the host VMM. This TD exit is trap like, meaning it happens after TDG.SERVTD.RD has completed its operation. On the following TDH.VP.ENTER, the host VMM may set a HOST_RECOVERABILITY_HINT flag, indicating that TDG.SERVTD.RD may be retried. From the guest TD's perspective, this flag appears in bit 60 of the status code returned in RAX. See the [TDX Module Base Spec] for details.

5.5.12.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.393 TDG.SERVTD.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target TD's TDR page (from binding handle)	TDR	R	Opaque	N/A	Shared(h)	Shared(h)	Shared(h)
Implicit	N/A	N/A	Service (this) TD's TDR page	TDR	None	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS structure	TDCS	R	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Shared	N/A	N/A

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	Service (this) TD's TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)	Shared(i)	Shared(i)
Implicit	N/A	N/A	Target TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Target TD's TDCS.OP_STATE	OP_STATE	RW	Opaque	N/A	Shared(h)	N/A	N/A
Implicit	N/A	N/A	Target TD's Binding table		R	Opaque	N/A	Shared(h)	None	None
Implicit	N/A	N/A	Target TD's TD metadata	N/A	R	Opaque	N/A	None	None	None

5.5.12.5. Completion Status Codes

Table 5.394: TDG.SERVTD.RD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_METADATA_FIRST_FIELD_ID_IN_CONTEXT	Indicates that the first field ID in context is returned
TDX_METADATA_FIELD_VALUE_NOT_VALID	
TDX_OP_STATE_INCORRECT	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_OPERAND_ADDR_RANGE_ERROR	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_PAGE_METADATA_INCORRECT	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.

Completion Status Code	Description
TDX_SERVTD_INFO_HASH_MISMATCH	This service TD's info hash doesn't match the service TD info hash in the target TD's binding information. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_NOT_BOUND	This service TD is not bound to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_UUID_MISMATCH	This service TD's TD_UUID doesn't match the service TD UUID in the target TD's binding information. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SUCCESS	TDG.SERVTD.RD is successful.
TDX_TARGET_UUID_MISMATCH	The target TD's TD_UUID value provided in R13:R10 doesn't match the actual value.
TDX_TARGET_UUID_UPDATED	The target TD's TD_UUID value provided in R13:R10 doesn't match the current actual value, but it does match the TD_UUID that target TD had before it was imported. In this case, the current TD_UUID value is provided in R13:R10, and the operation can be retried.
TDX_TD_FATAL	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_TD_KEYS_NOT_CONFIGURED	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_TDCS_NOT_ALLOCATED	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.

5.5.13. TDG.SERVTD.REBIND.APPROVE

The TDG.SERVTD.REBIND.APPROVE API is called by the currently bound service TD to approve a new Service TD to be bound to the target TD.

5.5.13.1. Input Operands

Table 5.395: TDG.SERVTD.REBIND.APPROVE Input Operand Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 33
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Old Binding Handle		
RDX	Rebind Session Token [63:0]		
R8	Rebind Session Token [127:64]		
R9	Rebind Session Token [195:128]		
R10	Target TD's TD_UUID bits 63:0		
R11	Target TD's TD_UUID bits 127:64		
R12	Target TD's TD_UUID bits 191:128		
R13	Target TD's TD_UUID bits 255:192		
R14	Rebind Session Token [255:196]		

5.5.13.2. Output Operands

Table 5.396: TDG.SERVTD.REBIND.APPROVE Output Operand Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.13.5
R10	Updated target TD's TD_UUID bits 63:0 – see the description below.
R11	Updated target TD's TD_UUID bits 127:64 – see the description below.
R12	Updated target TD's TD_UUID bits 191:128 – see the description below.
R13	Updated target TD's TD_UUID bits 255:192 – see the description below.
Other	Unmodified

5.5.13.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.13.3.1. Overview

TDG.SERVTD.REBIND.APPROVE allows the calling Service TD to approve a new Service TD to be bound to the target TD currently bound to it. It sets the target TD's TDCS.REBIND_SESSION_TOKENS[slot] to the provided input rebind session token, where the slot is the current service TD's binding slot.

- 5 For Service TD rebinding details, see the [Base Spec].

5.5.13.3.2. Enumeration

Availability of TDG.SERVTD.REBIND.APPROVE is enumerated by TDX_FEATURES0.SERVTD_REBIND (bit 48), readable by TDG.SYS.RD*. If not supported, calling TDG.SERVTD.REBIND.APPROVE returns a TDX_OPERAND_INVALID(RAX) status.

5.5.13.3.3. TD_UUID Update

- 10 TD_UUID is updated when the target TD is imported. If the service TD binding to the target TD happened before the target TD was imported, the TD_UUID provided in R13:R10 may no longer be correct. In this case, if the TD_UUID provided in R13:R10 is equal to the pre-import TD_UUID of the target TD, TDG.SERVTD.REBIND.APPROVE returns TDX_TARGET_UUID_UPDATED status in RAX, and updates R13:R10 with the imported value of TD_UUID. The caller should retry the operation with the new TD_UUID.

5.5.13.3.4. Cross-TD Traps

- 15 Failure to access the metadata of the target TD may result in a cross-TD trap TD exit to the host VMM. This TD exit is trap like, meaning it happens after TDG.SERVTD.RD has completed its operation. On the following TDH.VP.ENTER, the host VMM may set a HOST_RECOVERABILITY_HINT flag, indicating that TDG.SERVTD.REBIND.APPROVE may be retried. From the guest TD's perspective, this flag appears in bit 60 of the status code returned in RAX. See the [TDX Module Base Spec]
- 20 for details.

5.5.13.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.397: TDG.SERVTD.REBIND.APPROVE Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target TD's TDR page (from binding handle)	TDR	RW	Opaque	N/A	Shared(h)	Shared(h)	Shared(h)
Implicit	N/A	N/A	Service (this) TD's TDR page	TDR	None	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS structure	TDCS	R	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Service (this) TD's TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)	Shared(i)	Shared(i)
Implicit	N/A	N/A	Target TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared(h)	N/A	N/A
Implicit	N/A	N/A	Target TD's Binding table		R	Opaque	N/A	Exclusive(h)	None	None

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	Target TD's TD metadata	N/A	RW	Opaque	N/A	None	None	None

5.5.13.5. Completion Status Codes

Table 5.398: TDG.SERVTD.REBIND.APPROVE Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.SERVTD.REBIND.APPROVE is successful.
TDX_OP_STATE_INCORRECT	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_OPERAND_ADDR_RANGE_ERROR	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_PAGE_METADATA_INCORRECT	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_INFO_HASH_MISMATCH	This service TD's info hash doesn't match the service TD info hash in the target TD's binding information. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_NOT_BOUND	This service TD is not bound to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_UUID_MISMATCH	This service TD's TD_UUID doesn't match the service TD UUID in the target TD's binding information. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SUCCESS	TDG.SERVTD.REBIND.APPROVE is successful.

Completion Status Code	Description
TDX_TARGET_UUID_MISMATCH	The target TD's TD_UUID value provided in R13:R10 doesn't match the actual value.
TDX_TARGET_UUID_UPDATED	The target TD's TD_UUID value provided in R13:R10 doesn't match the current actual value, but it does match the TD_UUID that target TD had before it was imported. In this case, the current TD_UUID value is provided in R13:R10, and the operation can be retried.
TDX_TD_FATAL	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.

5.5.14. TDG.SERVTD.WR Leaf

As a service TD, write a metadata field (control structure field) of a target TD.

5.5.14.1. Input Operands

Table 5.399: TDG.SERVTD.WR Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 19
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Binding handle		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. A value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		
R8	Data to write to the field		
R9	A 64b write mask to indicate which bits of the value in R8 are to be written to the field		
R10	Target TD's TD_UUID bits 63:0		
R11	Target TD's TD_UUID bits 127:64		
R12	Target TD's TD_UUID bits 191:128		
R13	Target TD's TD_UUID bits 255:192		

5.5.14.2. Output Operands

Table 5.400: TDG.SERVTD.WR Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
R8	Previous contents of the field In case of an error, R8 returns 0.
R10	Updated target TD's TD_UUID bits 63:0 – see the description below.
R11	Updated target TD's TD_UUID bits 127:64 – see the description below.
R12	Updated target TD's TD_UUID bits 191:128 – see the description below.

Operand	Description
R13	Updated target TD's TD_UUID bits 255:192 – see the description below.
Other	Unmodified

5.5.14.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.14.3.1. Overview

TDG.SERVTD.WR writes a metadata field (control structure field) of a target TD. The value (R8) is written as specified by the write mask (R9). Writing is subject to the field's internal write mask (per the TD's ATTRIBUTES.DEBUG bit). Writing of specific fields is also subject to additional rules.

Table 5.401: Metadata Field Write Rules

Write Mask Bit in R9	Internal Write Mask Bit	Value Bit in R8
0	N/A	Silently ignored
1	0	Must be the same as the current field's bit
1	1	Written to the current field's bit

5.5.14.3.2. Enumeration

Availability of TDG.SERVTD.WR is enumerated by TDX_FEATURES0.SERVICE_TD (bit 2), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.SERVTD.WR returns a TDX_OPERAND_INVALID(RAX) status.

5.5.14.3.3. TD_UUID Update

TD_UUID is updated when the target TD is imported. If the service TD binding to the target TD happened before the target TD was imported, the TD_UUID provided in R13:R10 may no longer be correct. In this case, if the TD_UUID provided in R13:R10 is equal to the pre-import TD_UUID of the target TD, TDG.SERVTD.WR returns TDX_TARGET_UUID_UPDATED status in RAX, and updates R13:R10 with the imported value of TD_UUID. The caller should retry the operation with the new TD_UUID.

5.5.14.3.4. Cross-TD Traps

Failure to access the metadata of the target TD may result in a cross-TD trap TD exit to the host VMM. This TD exit is trap like, meaning it happens after TDG.SERVTD.WR has completed its operation. On the following TDH.VP.ENTER, the host VMM may set a HOST_RECOVERABILITY_HINT flag, indicating that TDG.SERVTD.WR may be retried. From the guest TD's perspective, this flag appears in bit 60 of the status code returned in RAX. See the [TDX Module Base Spec] for details.

5.5.14.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.402 TDG.SERVTD.WR Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Explicit	RCX	HPA	Target TD's TDR page (from binding handle)	TDR	RW	Opaque	N/A	Shared(h)	Shared(h)	Shared(h)

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions		
								Operand	Contain. 2MB	Contain. 1GB
Implicit	N/A	N/A	Service (this) TD's TDR page	TDR	None	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS structure	TDCS	R	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS.RTMR	SHA384_HASH	N/A	Opaque	N/A	Shared	N/A	N/A
Implicit	N/A	N/A	Service (this) TD's TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)	Shared(i)	Shared(i)
Implicit	N/A	N/A	Target TD's TDCS structure	TDCS	RW	Opaque	N/A	Shared(i)	None	None
Implicit	N/A	N/A	Service (this) TD's TDCS.OP_STATE	OP_STATE	R	Opaque	N/A	Shared(h)	N/A	N/A
Implicit	N/A	N/A	Target TD's Binding table		R	Opaque	N/A	Shared(h)	None	None
Implicit	N/A	N/A	Target TD's TD metadata	N/A	RW	Opaque	N/A	None	None	None

5.5.14.5. Completion Status Codes

Table 5.403: TDG.SERVTD.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_NOT_WRITABLE	
TDX_METADATA_FIELD_VALUE_NOT_VALID	
TDX_METADATA_WR_MASK_NOT_VALID	
TDX_OP_STATE_INCORRECT	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_OPERAND_ADDR_RANGE_ERROR	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	

Completion Status Code	Description
TDX_PAGE_METADATA_INCORRECT	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_INFO_HASH_MISMATCH	This service TD's info hash doesn't match the service TD info hash in the target TD's binding information. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_NOT_BOUND	This service TD is not bound to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SERVTD_UUID_MISMATCH	This service TD's TD_UUID doesn't match the service TD UUID in the target TD's binding information. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_SUCCESS	TDG.SERVTD.WR is successful.
TDX_TARGET_UUID_MISMATCH	The target TD's TD_UUID value provided in R13:R10 doesn't match the actual value.
TDX_TARGET_UUID_UPDATED	The target TD's TD_UUID value provided in R13:R10 doesn't match the current actual value, but it does match the TD_UUID that target TD had before it was imported. In this case, the current TD_UUID value is provided in R13:R10, and the operation can be retried.
TDX_TD_FATAL	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_TD_KEYS_NOT_CONFIGURED	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.
TDX_TDCS_NOT_ALLOCATED	This status code refers to the target TD. Bit 60 (HOST_RECOVERABILITY_HINT) contains a hint from the host VMM that the error condition has been resolved, and the service TD can retry the operation.

5.5.15. TDG.SYS.RD Leaf

Read a TDX Module global-scope metadata field.

5.5.15.1. Input Operands

Table 5.404: TDG.SYS.RD Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 11
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. A value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		

5.5.15.2. Output Operand

Table 5.405: TDG.SYS.RD Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
RDX	If the input field identifier was -1, RDX returns the first readable field identifier. Else, in case of an error, RDX returns -1. On success, RDX returns the next readable field identifier. A value of -1 indicates no next field identifier is available.
R8	Contents of the field In case of no success, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.5.15.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDG.SYS.RD reads a TDX Module global-scope metadata field.

RDX returns the next guest-side readable field identifier. This may be used by the guest TD to enumerate the TDX Module's capabilities and configuration. To read all the available fields, the guest TD can invoke TDG.SYS.RD in a loop, starting with field identifier -1 as an input, until RDX returns -1. A status code of TDX_METADATA_FIELD_SKIP indicates that the returned value is not applicable. Alternatively, the guest TD can use TDG.SYS.RDALL.

5.5.15.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.406 TDG.SYS.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)

5

5.5.15.5. Completion Status Codes**Table 5.407: TDG.SYS.RD Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_METADATA_FIRST_FIELD_ID_IN_CONTEXT	Indicates that the first field ID in context is returned
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.SYS.RD is successful.

5.5.16. TDG.SYS.RDALL Leaf

Read all guest-readable TDX Module global-scope metadata fields.

5.5.16.1. Input Operands

Table 5.408: TDG.SYS.RDALL Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 12
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RDX	The GPA of a 4KB buffer where a metadata list will be returned The buffer must be aligned on 4KB. In case of error, some field value entries might not contain valid data.		
R8	Initial field identifier – see 3.10 If R8's value is -1, then TDG.SYS.RDALL will start from the first global-scope metadata field identifier. Else, LAST_ELEMENT_IN_FIELD, LAST_FIELD_IN_SEQUENCE, WRITE_MASK_VALID and CONTEXT_CODE fields are ignored. The FIELD_CODE must be the code of the first element of a metadata field.		

5

5.5.16.2. Output Operands

Table 5.409: TDG.SYS.RDALL Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
R8	Next field identifier. A value of -1 means all applicable field identifiers have been returned in the metadata list. In case of an error, as indicated by RAX, R8 returns -1.
Other	Unmodified

5.5.16.3. Leaf Function Description

- 10 **Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDG.SYS.RDALL reads all host-readable TDX Module global-scope metadata fields into a metadata list in the provided page.

- 15 If one or more applicable fields do not fit in the provided list buffer, the function can be invoked in a loop, each invocation providing an initial field identifier returned as the next field identifier of the previous invocation, as shown in the following example:

1. NEXT_FIELD_ID = -1

2. Repeat:
 - 2.1. Set LIST_BUFFER to the next 4K buffer
 - 2.2. Invoke TDG.SYS.RDALL(RDX = LIST_BUFFER, R8 = NEXT_FIELD_ID)
 - 2.3. STATUS = RAX, NEXT_FIELD_ID = R8
5. Until ((STATUS is a non-recoverable error) or (NEXT_FIELD_ID is -1))

The function never returns an empty list if there's no error.

5.5.16.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.410: TDG.SYS.RDALL Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RDX	GPA	Metadata List	MD_LIST	RW	Private	4096	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)

5.5.16.5. Completion Status Codes

Table 5.411: TDG.SYS.RDALL Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.SYS.RDALL is successful.

5.5.17. TDG.VM.RD Leaf

Read a TD-scope metadata field (control structure field) of a TD.

5.5.17.1. Input Operands

Table 5.412: TDG.VM.RD Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 7
	23:16	Version Number	Selects the TDCALL interface function version Version number may be 0 or 1. See the enumeration details below.
	63:24	Reserved	Must be 0
RCX	Reserved, must be 0		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. For TDG.VM.RD version 1 or higher, a value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		

5.5.17.2. Output Operands

Table 5.413: TDG.VM.RD Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
RDX	For TDG.VM.RD version 0, RDX is unmodified. For TDG.VM.RD version 1 or higher: - If the input field identifier was -1, RDX returns the first readable field identifier. - Else, in case of an error, RDX returns -1. On success, RDX returns the next readable field identifier. A value of -1 indicates no next field identifier is available.
R8	Contents of the field In case of no success, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.5.17.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.17.3.1. Overview

TDG.VM.RD reads a VM-scope metadata field (control structure field) of a TD.

If version 1 or higher is specified in RAX, RDX returns the next host-side readable field identifier. This may be used by the guest TD to dump the guest readable TD metadata. To read all the available fields, the guest TD can invoke TDG.VM.RD in a loop, starting with field identifier -1 as an input, until RDX returns -1. A status code of TDX_METADATA_FIELD_SKIP indicates that the returned value is not applicable.

5 5.5.17.3.2. Enumeration

Availability of TDG.VM.RD version 1 is enumerated by TDX_FEATURES0.ENHANCED_METADATA (bit 3), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.VM.RD with a version number higher than 0 returns a TDX_OPERAND_INVALID(RAX) status.

5.5.17.4. Operands Information

- 10 To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.414 TDG.VM.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TD metadata (guest-side access)	N/A	R	Opaque	N/A	Shared

5.5.17.5. Completion Status Codes

15 **Table 5.415: TDG.VM.RD Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_METADATA_FIRST_FIELD_ID_IN_CONTEXT	Indicates that the first field ID in context is returned
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VM.RD is successful.

5.5.18. TDG.VM.WR Leaf

Write a TD-scope metadata field (control structure field) of a TD.

5.5.18.1. Input Operands

Table 5.416: TDG.VM.WR Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 8
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Reserved, must be 0		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored.		
R8	Data to write to the field		
R9	A 64b write mask to indicate which bits of the value in R8 are to be written to the field		

5.5.18.2. Output Operands

Table 5.417: TDG.VM.WR Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
R8	Previous contents of the field In case of an error, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.5.18.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

TDG.VM.WR writes a VM-scope metadata field (control structure field) of a TD. The value (R8) is written as specified by the write mask (R9). Writing is subject to the field's internal write mask (per the TD's ATTRIBUTES.DEBUG bit). Writing of specific fields is also subject to additional rules.

Table 5.418: Metadata Field Write Rules

Write Mask Bit in R9	Internal Write Mask Bit	Value Bit in R8
0	N/A	Silently ignored

Write Mask Bit in R9	Internal Write Mask Bit	Value Bit in R8
1	0	Must be the same as the current field's bit
1	1	Written to the current field's bit

5.5.18.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.419 TDG.VM.WR Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TD metadata (guest-side access)	N/A	R	Opaque	N/A	Shared

5.5.18.5. Completion Status Codes

Table 5.420: TDG.VM.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_NOT_WRITABLE	
TDX_METADATA_FIELD_VALUE_NOT_VALID	
TDX_METADATA_WR_MASK_NOT_VALID	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VM.WR is successful.

5.5.19. TDG.VP.CPUIDVE.SET Leaf

TDG.VP.CPUIDVE.SET controls unconditional #VE on CPUID execution by the guest TD.

Note: TDG.VP.CPUIDVE.SET is provided for backward compatibility. The guest TD may control the same settings by writing to the VCPU-scope metadata fields CPUID_SUPERVISOR_VE and CPUID_USER_VE using TDG.VP.WR.

5.5.19.1. Input Operands

Table 5.421: TDG.VP.CPUIDVE.SET Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 5
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Controls whether CPUID executed by the guest TD will cause #VE(CONFIG_PARAVIRT) unconditionally		
	Bits	Name	Description
	0	SUPERVISOR	Flags that when CPL is 0, a CPUID executed by the guest TD will cause a #VE(CONFIG_PARAVIRT) unconditionally
	1	USER	Flags that when CPL > 0, a CPUID executed by the guest TD will cause a #VE(CONFIG_PARAVIRT) unconditionally
	63:2	RESERVED	Reserved: must be 0

5.5.19.2. Output Operands

Table 5.422: TDG.VP.CPUIDVE.SET Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
Other	Unmodified

5.5.19.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

This function controls whether execution of CPUID by the guest TD, when running in supervisor mode and/or in user mode, will unconditionally result in a #VE(CONFIG_PARAVIRT).

5.5.19.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.423 TDG.VP.CPUIDVE.SET Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	RW	Opaque	N/A	Shared(i)

5.5.19.5. Completion Status Codes**Table 5.424: TDG.VP.CPUIDVE.SET Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VP.CPUIDVE.SET is successful.

5.5.20. TDG.VP.ENTER Leaf

Enter L2 VCPU operation.

From the L1 VMM's point of view, TDG.VP.ENTER is a complex operation that normally involves L1→L2 VM entry and L2→L1 VM exit; however, it may fail before L2 VM entry and may also involve TD exits and entries. Therefore, output operands are specified by multiple tables below.

5.5.20.1. Input Operands

Table 5.425: TDG.VP.ENTER Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	TDCALL instruction leaf number and version, see 5.5.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the TDCALL interface function: 25
		23:16	Version Number	Selects the TDCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	VM_FLAGS	VM identifier and flags		
		Bits	Name	Description
		1:0	INVD_TRANSLATIONS	Controls how TDG.VP.ENTER flushes the TLB context and extended paging structure (EPxE) caches associated with the L2 VM before entering the L2 VCPU
		51:2	Reserved	Reserved: must be 0
		53:52	VM	L2 virtual machine index (must be 1 or higher)
		63:54	Reserved	Reserved: must be 0
RDX	GUEST_STATE_GPA	The GPA of a 256-bytes aligned L2_ENTER_GUEST_STATE structure - see 3.8.1 for details.		

Table 5.426: INVD_TRANSLATION Definition

Value	Address Translation Invalidation	Underlying Mechanism	Comments
0	No invalidation	None	
1	Invalidate all TLB entries and extended paging-structure translations (EPxE) associated with the L2 VM being entered	INVEPT single-context invalidation (type 1)	
2	Invalidate all TLB entries associated with the L2 VM being entered	INVVPID single-context invalidation (type 1)	See enumeration details below.
3	Invalidate TLB entries associated with the L2 VM being entered, excluding global translations	INVVPID single-context invalidation, retaining global translations (type 3)	See enumeration details below.

5.5.20.2. Output Operands

TDG.VP.ENTER output format depends on how the function was terminated.

5.5.20.2.1. Output Operands Format on No L1→L2 Entry

The following table details TDG.VP.ENTER output operands when the interface function returns **without entering the L2 VCPU** due to an error or some other condition.

Table 5.427: TDG.VP.ENTER Output Operands Definition on No L2 VM Entry

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		47:32	CLASS and DETAILS_L1	May have the following values: • TDX_PENDING_INTERRUPT, indicating that an interrupt is pending for L1 • Any other value not in the table below
		Other		See the function completion status definition in 5.5.1
Other		Unmodified		

5.5.20.2.2. Output Operands Format on Successful L1→L2 Entry Followed by L2→L1 Exit

The following table details TDG.VP.ENTER output operands when L2 VM entry succeeds, and later an L2 VM exit occurs due to a **VMX architectural exit reason**.

Table 5.428: TDG.VP.ENTER Output Operands Definition on an L2→L1 Exits Following an L1→L2 Entry

Operand	Name	Description		
RAX	Status	SEAMCALL instruction return code		
		Bit(s)	Name	Description
		31:0	DETAILS_L2: Exit Reason	L2 VMCS exit reason
		47:32	CLASS and DETAILS_L1	May have the following values: • TDX_SUCCESS, indicating a normal L2→L1 exit • TDX_L2_EXIT_PENDING_INTERRUPT*, indicating an L2→L1 exit due to an interrupt posted to L1 or L2 • TDX_L2_EXIT_HOST_ROUTED_*, indicating a TD exit from L2 where the host VMM requested resumption of L1 Other values in the range 0x1100 through 0x111F are reserved for future additional status codes that indicate an L2→L1 exit following an L1→L2 entry.
		Other		See the function completion status definition in 5.5.1
RCX	Exit Qualification	exit qualification from L2 VMCS		
RDX	Guest Linear Address	guest-linear address from L2 VMCS		
RSI	CS Info	CS selector, AR and limit		
		Bits	Details	

Operand	Name	Description			
		15:0	CS Selector		
		31:16	CS AR bit 15:0		
		63:32	CS Limit		
RDI	CS Base	CS base address			
R8	Guest Physical Address	guest-physical address from L2 VMCS			
R9	VM-Exit Interruption Information	The following information is provided for L2 VM exits due to vectored events. In other cases, R9 content should be ignored.			
		Bits	Details		
		31:0	VM-Exit Interruption Information		
		63:32	VM-Exit Interruption Error Code		
R10	IDT-Vectoring Information	The following information is provided for L2 VM exits that occur during event delivery. In other cases, R10 content should be ignored.			
		Bits	Details		
		31:0	IDT-Vectoring Information		
		63:32	IDT-Vectoring Error Code		
R11	VM-Exit Instruction Information	The following information is provided for L2 VM exits due to instruction execution. In other cases, R11 content should be ignored.			
		Bits	Details		
		31:0	VM-Exit Instruction Information		
		63:32	VM-Exit Instruction Length		
R12	Additional Exit Information	Additional exit information			
		Bits	Details		
		1:0	CPL (from GuestSS.AR.DPL)		
		63:2	Reserved, cleared to 0		
R13	Extended Exit Qualification	Extended exit qualification			
		Bits	Details		
		3:0	Extended exit qualification type		
			Value	Name	Description
			0	NONE	No extended exit qualification
			6	PENDING_EPT_VIOLATION	Extended exit qualification for an EPT violation due to L2 VM access to a PENDING page
			Other	Reserved	
		63:4	Reserved, set to 0		
R14	VM-Exit Extended Instruction Information	If APX is virtualized as supported (virtual CPUID(7,1).EDX[21] is 1), then R14 returns the L2 VMCS' VM-Exit Extended Instruction Information field. Else, R14 returns 0.			

Operand	Name	Description
RBX, R15	None	Cleared to 0
Other state	Any state that the L2 VM is allowed to use may be modified.	

5.5.20.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.20.3.1. Overview

TDG.VP.ENTER transitions the VCPU into L2 VM operation. The function returns either if failed to enter L2 VM or after successful entry to L2 VM and then exit from L2 VM.

5.5.20.3.2. Enumeration

Availability of TDG.VP.ENTER is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDG.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.VP.ENTER returns a TDX_OPERAND_INVALID(RAX) status.

Available INVD_TRANSLATION values are enumerated by TDX_FEATURES0.L2_TLB_INVD_OPT (bit 19).

Availability of PENDING_EPT_VIOLATION indication in R13 is enumerated by TDX_FEATURES.PENDING_EPT_VIOLATION_V2 (bit 16).

5.5.20.3.3. CPU State Preservation Following a Successful L1→L2 VM Entry and an L2→L1 VM Exit

Following a successful L1→L2 VM entry and an L2→L1 VM exit, some CPU state is modified:

- General purpose register (GPR) values are not preserved.
- Any state that the L2 VM is allowed to use may be modified.

5.5.20.3.4. Non-Error Termination Conditions

The following table lists non-error TDG.VP.ENTER termination conditions:

Table 5.429: TDG.VP.ENTER Termination Cases

Case	Status in RAX[63:32]	Description
Normal	TDX_SUCCESS	L1→L2 entry was successful, followed by an L2→L1 exit. L2 VM exit information is provided in output GPRs.
Host Requested L2 Exit	TDX_L2_EXIT_HOST_ROUTED_ASYNC	L1→L2 entry was successful. Later, following direct TD exit from L2, the host VMM requested resumption of L1. L2 CPU state is updated in the register list. L2 VM exit information is provided in output GPRs. This information was provided to the host VMM on TD exit; it may or may not be meaningful to the L1 VMM. In case of TDG.VP.VMCALL, the L2 CPU state is the state after completion of that function, e.g., GPR values are as returned by the host VMM as inputs to TDH.VP.ENTER. This condition is sticky. I.e., if resumption of L1 encountered a problem that required a TD exit (e.g., an EPT violation) the following TD entry resumes L1 and provides the same TDX_L2_EXIT_HOST_ROUTED status.

Case	Status in RAX[63:32]	Description
Host Requested L2 Exit following TDG.VP.VMCALL	TDX_L2_EXIT_HOST_ROUTED_TDVMCALL	L1→L2 entry was successful. Later, following TDG.VP.VMCALL that caused a direct TD exit from L2, the host VMM requested resumption of L1. L2 CPU state is updated in the L2_ENTER_GUEST_STATE structure. The L2 CPU state is the state after completion of TDG.VP.VMCALL, e.g., GPR values are as returned by the host VMM as inputs to TDH.VP.ENTER. L2 VM exit information is provided in output GPRs. This information was provided to the host VMM on the last TD exit; it may or may not be meaningful to the L1 VMM. This condition is sticky. I.e., if resumption of L1 encountered a problem that required a TD exit (e.g., an EPT violation) the following TD entry resumes L1 and provides the same TDX_L2_EXIT_HOST_ROUTED_TDVMCALL status. Note that in such a case the L2 VM exit information reflects, e.g., the EPT violation, not the original TDG.VP.VMCALL exit.
Pending Interrupt L2 Exit	TDX_L2_EXIT_PENDING_INTERRUPT	L1→L2 entry was successful. Later, an L2→L1 exit happened due to an interrupt that was posted to L1. L2 CPU state is updated in the register list. L2 VM exit information is provided in output GPRs but is not necessarily meaningful to the L1 VMM (e.g., VM-exit interruption information is for the external interrupt that triggered the L2→L1 exit).
Pending Interrupt L2 Exit	TDX_L2_EXIT_PENDING_INTERRUPT_TDVMCALL	L1→L2 entry was successful. Later, following TDG.VP.VMCALL that caused a direct TD exit from L2, the host VMM resumed the TD. During TD resumption, a posted interrupt to either L1 or any L2 was detected by the TDX Module. L2 CPU state is updated in the L2_ENTER_GUEST_STATE structure. The L2 CPU state is the state after completion of TDG.VP.VMCALL, e.g., GPR values are as returned by the host VMM as inputs to TDH.VP.ENTER. L2 VM exit information is provided in output GPRs. This information was provided to the host VMM on the last TD exit; it may or may not be meaningful to the L1 VMM. This condition is sticky. I.e., if resumption of L1 encountered a problem that required a TD exit (e.g., an EPT violation) the following TD entry resumes L1 and provides the same TDX_L2_EXIT_PENDING_INTERRUPT_TDVMCALL status. Note that in such a case the L2 VM exit information reflects, e.g., the EPT violation, not the original TDG.VP.VMCALL exit.
No L2 Entry	Other	L1→L2 entry was aborted because of some condition, which may or may not be an error, as indicated by RAX bit 63. E.g., entry may have been aborted due to a pending virtual interrupt. In this case, the L1 VMM typically sets RFLAGS.IF to 1, handles the interrupt and then invokes TDG.VP.ENTER again.

5.5.20.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.430: TDG.VP.ENTER Memory Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RDX	GPA	Guest state	L2_ENTER_GUEST_STATE	RW	Private	256B	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	None	Opaque	N/A	Shared(i)

5.5.20.5. Completion Status Codes**Table 5.431: TDG.VP.ENTER Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_L2_EXIT_HOST_ROUTED_ASYNC	L1→L2 entry succeeded. Later, following an asynchronous TD exit from L2, the host VMM requested resumption of L1.
TDX_L2_EXIT_HOST_ROUTED_TDVMCALL	L1→L2 entry succeeded. Later, following a TDG.VP.VMCALL TD exit from L2, the host VMM requested resumption of L1.
TDX_L2_EXIT_PENDING_INTERRUPT	L1→L2 entry succeeded, and later L2→L1 exit happened due to an interrupt that was posted to L1 and is pending.
TDX_OPERAND_INVALID	
TDX_PENDING_INTERRUPT	L1→L2 entry was aborted because an interrupt is pending for the L1 VMM. This indication is returned even if the L1 VMMs cleared RFLAGS.IF.
TDX_SUCCESS	

5.5.21. TDG.VP.INFO Leaf

Get guest TD execution environment information.

5.5.21.1. Input Operands**Table 5.432: TDG.VP.INFO Input Operands Definition**

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 1
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0

5.5.21.2. Output Operands**Table 5.433: TDG.VP.INFO Output Operands Definition**

Operand	Description		
RAX	TDCALL instruction return code – see 5.5.1 – returns a constant value of TDX_SUCCESS (0)		
RCX	Bits	Name	Description
	5:0	GPAW	The effective GPA width (in bits) for this TD (do not confuse with MAXPA). SHARED bit is at GPA bit GPAW-1. Only GPAW values 48 and 52 are possible.
	63:6	RESERVED	Reserved: 0
RDX	The TD's ATTRIBUTES (provided as input to TDH.MNG.INIT)		
R8	Bits	Name	Description
	31:0	NUM_VCPUS	Number of Virtual CPUs that are usable (i.e., either active or ready)
	63:32	MAX_VCPUS	TD's maximum number of Virtual CPUs (provided as input to TDH.MNG.INIT)
R9	Bits	Name	Description
	31:0	VCPU_INDEX	Virtual CPU index, starting from 0 and allocated sequentially on each successful TDH.VP.INIT
	63:32	RESERVED	Reserved for enumerating future Intel TDX Module capabilities, etc.: set to 0
R10	Bits	Name	Description
	0	SYS_RD	Indicates that the TDG.SYS.RD/RDM/RDALL functions are available. Further enumeration can be done using these functions.
	63:1	RESERVED	Reserved – set to 0
R11	Reserved for enumerating future Intel TDX Module capabilities, etc.: set to 0		

Operand	Description
Other	Unmodified

5.5.21.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

- 5 TDG.VP.INFO provides the TD software with execution environment information – beyond information that is provided by CPUID.

5.5.21.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

10

Table 5.434: TDG.VP.INFO Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	R	Opaque	N/A	Shared(i)

5.5.21.5. Completion Status Codes

Table 5.435: TDG.VP.INFO Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_SUCCESS	TDG.VP.INFO is successful.

5.5.22. TDG.VP.INVEPT Leaf

Invalidate cached EPT translations for selected L2 VMs.

5.5.22.1. Input Operands

Table 5.436: TDG.VP.INVEPT Input Operands Definition

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 26
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	VM index bitmap Bit N value of 1 indicates a request to invalidate EPT for VM index N. N must be between 1 and the number of L2 VMs in this TD.		
	Bits	Name	Description
	0	Reserved	Reserved: must be 0
	1	L2_VM_1	Invalidate EPT for L2 VM #1
	2	L2_VM_2	Invalidate EPT for L2 VM #2
	3	L2_VM_3	Invalidate EPT for L2 VM #3
	63:4	Reserved	Reserved: must be 0

5.5.22.2. Output Operands

Table 5.437: TDG.VP.INVEPT Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code
Other	Unmodified

5.5.22.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.22.3.1. Overview

TDG.VP.INVEPT executes INVEPT to invalidate the EPT translations of the specified L2 VMs.

5.5.22.3.2. Enumeration

- Availability of TDG.VP.INVEPT is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.VP.INVEPT returns a TDX_OPERAND_INVALID(RAX) status.

5.5.22.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.438 TDG.VP.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	R	Opaque	N/A	Shared(i)

5

5.5.22.5. Completion Status Codes**Table 5.439: TDG.VP.INVEPT Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VP.INVEPT is successful.

5.5.23. TDG.VP.INVGLA Leaf

Invalidate Guest Linear Address (GLA) mappings in the translation lookaside buffers (TLBs) and paging-structure caches for a specified L2 VM and a specified list of 4KB-aligned linear addresses.

5.5.23.1. Input Operands

5

Table 5.440: TDG.VP.INVGLA Input Operands Definition

Operand	Name	Description		
RAX	Leaf and Version	TDCALL instruction leaf number and version, see 5.5.1		
		Bits	Field	Description
		15:0	Leaf Number	Selects the TDCALL interface function: 27
		23:16	Version Number	Selects the TDCALL interface function version Must be 0
		63:24	Reserved	Must be 0
RCX	VM_AND_FLAGS	VM identifier and flags		
		Bits	Name	Description
		0	LIST	0: RDX contains a single GLA list entry 1: RDX contains the GPA and other information of a GLA list in memory.
		51:1	Reserved	Reserved: must be 0
		53:52	VM	L2 virtual machine index (must be 1 or higher)
		63:54	Reserved	Reserved: must be 0
RDX	GLA_LIST_ENTRY or GLA_LIST_INFO	Depending on the LIST flag in RCX, RDX contains either of the following: - A single GLA_LIST_ENTRY, specifying up to 512 consecutive guest linear addresses, each aligned on 4KB. - GLA_LIST_INFO, specifying the GPA of a guest linear address (GLA) list in private memory. Each entry in the GLA list specifies up to 512 consecutive guest linear addresses, each aligned on 4KB. GLA_LIST_INFO also specifies the first and last GLA list entries to process. See 3.6.4 for details.		

5.5.23.2. Output Operands

Table 5.441: TDG.VP.INVGLA Output Operands Definition

Operand		Description
RAX	Status	TDCALL instruction return code
RDX	GLA_LIST_ENTRY or GLA_LIST_INFO	Depending on the LIST flag provided as input in RCX, RDX contains either of the following: If LIST was 0, RDX contains the single GLA_LIST_ENTRY provided as an input, unmodified.

Operand		Description
		If LIST was 1, RDX contains the GLA_LIST_INFO provided as input, but with the FIRST_ENTRY and NUM_ENTRIES fields updated to reflect the number of entries processed so far. If all entries have been processed successfully, NUM_ENTRIES is set to 0.
Other		Unmodified

5.5.23.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5 5.5.23.3.1. Overview

TDG.VP.INVGLA executes INVVPID type 0 to invalidate the cached translations for the specified list of 4KB page Guest Linear Addresses (GLA) of the specified L2 VM.

5.5.23.3.2. Enumeration

10 Availability of TDG.VP.INVGLA is enumerated by TDX_FEATURES0.TD_PARTITIONING (bit 7), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.VP.INVGLA returns a TDX_OPERAND_INVALID(RAX) status.

5.5.23.3.3. Interruptibility

If, during its execution, TDG.VP.INVGLA detects that an external interrupt is pending, it may resume the guest TD with the CPU state unmodified, except for the following:

- GLA_LIST_INFO in RDX is updated to reflect the GLAs processed so far.

15 This allows the external interrupt to be recognized, causing a VM exit or a posted interrupt delivery. Typically, TDG.VP.INVGLA will be re-invoked (since RIP has not changed) and continue its work. Guest TD software is not directly involved.

Guest TD software is not directly involved. Guest TD should not precede the TDCALL with an STI instruction or a MOV to SS instruction. Posted interrupts may be delivered when the TDCALL flow is interrupted.

20 5.5.23.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.442: TDG.VP.INVGLA Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Explicit	RDX	GPA	GLA list page	GLA_LIST	R	Private	4096	None
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	R	Opaque	N/A	Shared(i)

25 5.5.23.5. Completion Status Codes

Table 5.443: TDG.VP.INVGLA Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_OPERAND_INVALID	

Completion Status Code	Description
TDX_SUCCESS	TDG.VP.INVGLA is successful.

5.5.24. TDG.VP.RD Leaf

Read a VCPU-scope metadata field (control structure field) of a TD.

5.5.24.1. Input Operands

Table 5.444: TDG.VP.RD Input Operands

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 9
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Reserved, must be 0		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and ELEMENT_SIZE_CODE components of the field identifier are ignored. A value of -1 is a special case: it is not a valid field identifier; in this case the first readable field identifier is returned in RDX.		

5.5.24.2. Output Operands

Table 5.445: TDG.VP.RD Output Operands Definition

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
RDX	If the input field identifier was -1, RDX returns the first readable field identifier. Else, in case of an error, RDX returns -1. On success, RDX returns the next readable field identifier. A value of -1 indicates no next field identifier is available.
R8	Contents of the field In case of no success, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.5.24.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.24.3.1. Overview

TDG.VP.RD reads a VCPU-scope metadata field (control structure field) of a TD.

RDX returns the next host-side readable field identifier. This may be used by the guest TD to dump the guest readable VCPU metadata. To read all the available fields, the guest TD can invoke TDG.VP.RD in a loop, starting with field identifier

value of -1 as an input, until RDX returns -1. A status code of TDX_METADATA_FIELD_SKIP indicates that the returned value is not applicable.

5.5.24.3.2. Enumeration

Availability of TDG.VP.RD enumerated by TDX_FEATURES0.ENHANCED_METADATA (bit 3), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.VP.RD returns a TDX_OPERAND_INVALID(RAX) status.

5.5.24.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.446 TDG.VP.RD Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	R	Opaque	N/A	Shared(i)

5.5.24.5. Completion Status Codes

Table 5.447: TDG.VP.RD Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_SKIP	Indicates that the field value being read is not applicable and needs to be skipped. If called in a loop, use RDX as the identifier of the next field to be read, if any.
TDX_METADATA_FIRST_FIELD_ID_IN_CONTEXT	Indicates that the first field ID in context is returned
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VP.RD is successful.

5.5.25. TDG.VP.VEINFO.GET Leaf

Intel SDM, Vol. 3, 24.9.4	Information for VM Exits Due to Instruction Execution
Intel SDM, Vol. 3, 25.5.6	Virtualization Exceptions
Intel SDM, Vol. 3, 27.2.5	Information for VM Exits Due to Instruction Execution
Intel SDM, Vol. 3, Table 26-3	Format of Interruptibility State
Intel SDM, Vol. 3, 28.7.1	Interruptibility State

Get Virtualization Exception Information for the recent #VE exception.

5.5.25.1. Input Operands**Table 5.448: TDG.VP.VEINFO.GET Input Operands Definition**

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 3
	23:16	Version Number	Selects the TDCALL interface function version Version 0 is always supported. Versions 0 through 2 may be supported. See enumeration details below.
	63:24	Reserved	Must be 0

5.5.25.2. Output Operands**Table 5.449: TDG.VP.VEINFO.GET Output Operands Definition**

Operand	Description		
RAX	TDCALL instruction return code – see 5.5.1		
RCX	Bits	Name	Description
	31:0	Exit Reason	The 32-bit value that would have been saved into the VMCS as an exit reason if a VM exit had occurred instead of the virtualization exception
	39:32	#VE Category	If TDG.VP.VEINFO.GET was called with version 0, this field returns 0. Else, this field returns the #VE category, as defined in the [Base FAS].
	63:40	Reserved	Reserved: 0
	In case of an error, RCX returns 0.		
RDX	Exit Qualification: the 64-bit value that would have been saved into the VMCS as an exit qualification if a legacy VM exit had occurred instead of the virtualization exception In case of an error, RDX returns 0.		
R8	If supported, and if TDG.VP.VEINFO.GET was called with version 2 or higher and the exit reason (in RCX[31:0]) is APIC Write, R8 returns the content written to the VAPIC page in the page offset provided in the Exit Qualification (in RDX[11:0]). See enumeration details below. Else, Guest Linear Address: the 64-bit value that would have been saved into the VMCS as a guest-linear address if a legacy VM exit had occurred instead of the virtualization exception In case of an error, R8 returns 0.		

Operand	Description		
R9	Guest Physical Address: the 64-bit value that would have been saved into the VMCS as a guest-physical address if a legacy VM exit had occurred instead of the virtualization exception In case of an error, R9 returns 0.		
R10	Bits	Name	Description
	31:0	VM-exit instruction length	The 32-bit value that would have been saved into the VMCS as VM-exit instruction length if a legacy VM exit had occurred instead of the virtualization exception
	63:32	VM-exit instruction information	The 32-bit value that would have been saved into the VMCS as VM-exit instruction information if a legacy VM exit had occurred instead of the virtualization exception
	The content of R10 is only applicable for TDX-extended #VE (injected by the TDX Module), where Exit Reason is not EPT violation (48). It should be ignored for EPT violations converted by the CPU to #VE. In case of an error, R10 returns 0.		
R11	If TDG.VP.VEINFO.GET was called with version 0 or 1, then R11 is unmodified. Else, if RAX returns TDX_SUCCESS and APX is virtualized as supported (virtual CPUID(7,1).EDX[21] is 1), then R11 returns Extended Instruction Information: the 64-bit value that would have been saved into the VMCS as an extended instruction information if a legacy VM exit had occurred instead of the virtualization exception. Else, R11 returns 0.		
R12	If TDG.VP.VEINFO.GET was called with version 0 or 1, then R12 is unmodified. Else (version ≥ 2), R12 returns the following information:		
	Bits	Name	Description
	31:0	Interruptibility State	If supported, this field returns the 32-bit value that would have been saved into the VMCS Interruptibility State if a legacy VM exit had occurred instead of the virtualization exception. See enumeration details below. Else, this field returns 0.
	63:32	Reserved	Set to 0
	In case of an error, R12 returns 0.		
Other	Unmodified		

5.5.25.3. Leaf Function Description

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5 5.5.25.3.1. Overview

TDG.VP.VEINFO.GET returns the virtualization exception information of a #VE exception that was previously delivered to the guest TD. For details, see the [Base Spec] section on Virtualization Information (#VE).

Note: VMCS fields are returned by TDG.VP.VEINFO.GET as-is. Some parts of the returned values may not be applicable for specific #VE cases. See the [Intel SDM] for details.

10 5.5.25.3.2. Enumeration

Support of TDG.VP.VEINFO.GET version 1 is enumerated by TDX_FEATURES0.VE_REDUCTION (bit 30).

Support of TDG.VP.VEINFO.GET version 2 is enumerated by either of the following bits of TDX_FEATURES0, readable by TDG.SYS.RD*, being set to 1:

- APX (bit 28)
- ENHANCED_INTR_VIRTUALIZATION (bit 45)
- VEINFO_INTR_STATE (bit 46)

VAPIC page write value return by R8 is enumerated by TDX_FEATURES0.ENHANCED_VIRTUALIZATION (bit 45).

Interruptibility State return by R12[31:0] is enumerated by TDX_FEATURES0.VEINFO_INTR_STATE (bit 46).

5.5.25.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.450: TDG.VP.VEINFO.GET Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	RW	Opaque	N/A	Shared(i)

5.5.25.5. Completion Status Codes

Table 5.451: TDG.VP.VEINFO.GET Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_NO_VE_INFO	There is no Virtualization Exception information.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VP.VEINFO.GET is successful.

5.5.26. TDG.VP.VMCALL Leaf

Perform a TD Exit to the host VMM.

5.5.26.1. Input Operands**Table 5.452: TDG.VP.VMCALL Input Operands Definition**

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 0
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	A bitmap that controls which part of the guest TD GPR and XMM state is passed as-is to the VMM and back A bit value of 0 indicates that the corresponding register is saved by the Intel TDX Module, scrubbed to 0 before SEAMRET to the host VMM, and restored by the Intel TDX Module on the following TDH.VP.ENTER. A bit value of 1 indicates that the corresponding register is passed as-is to the host VMM, and on the following TDH.VP.ENTER, the register value is used as input from the host VMM and passed as-is to the guest TD. The value of RCX is passed to the host VMM.		
	Bits	Name	Description
	15:0	GPR Mask	Controls the transfer of GPR values: Bit 0: RAX – must be 0 Bit 1: RCX – must be 0 Bit 2: RDX Bit 3: RBX Bit 4: RSP – must be 0 Bit 5: RBP – if the TD's CONFIG_FLAG.NO_RBP_MOD is 1, then this bit must be 0. See the enumeration note below. Bit 6: RSI Bit 7: RDI Bits 15:8: R15 – R8
	31:16	XMM Mask	Controls the transfer of XMM15 – XMM0 register values
	63:32	Reserved	Reserved: must be 0
RBX, RDX, RBP, RSI, RDI, R8 – R15	If the corresponding bit in RCX is set to 1, the register value passed as-is to the host VMM on SEAMRET. Else, the register value is not used as an input and is preserved. If the TD's CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP can't be used to pass values to the host VMM. See the enumeration note below.		
XMM0 – XMM15	If the corresponding bit in RCX is set to 1, the register value passed as-is to the host VMM on SEAMRET. Else, the register value is not used as an input and is preserved.		

5.5.26.2. Output Operands**Table 5.453: TDG.VP.VMCALL Output Operands Definition**

Operand	Description
RAX	TDCALL instruction return code: returns a constant value of TDX_SUCCESS (0)
RCX	Unmodified
RBX, RDX, RBP, RDI, RSI, R8 – R15	If the corresponding bit in RCX is set to 1, the register value passed as-is from the host VMM's SEAMCALL(TDH.VP.ENTER) input. Else, the register value is unmodified. If the TD's CONFIG_FLAGS.NO_RBP_MOD is set to 1, then RBP can't be used to pass values from the host VMM and is not modified from its input value. See the enumeration note below.
XMM0 – XMM15	If the corresponding bit in RCX is set to 1, the register value passed as-is from the host VMM's SEAMCALL(TDH.VP.ENTER) input. Else, the register value is unmodified.
Other	Unmodified

5.5.26.3. Leaf Function Description

- Note:** The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.26.3.1. Overview

- TDG.VP.VMCALL performs a TD exit to the host VMM. From the VMM's point of view, this is the termination of a previous SEAMCALL(TDH.VP.ENTER). Selected GPR and XMM state is passed to the VMM host, controlled by RCX as shown above. The rest of the CPU state is saved in TDVPS and replaced with a synthetic state.

From the guest TD's point of view, a subsequent SEAMCALL(TDH.VP.ENTER) from the host VMM terminates the TDG.VP.VMCALL function. Most GPR state, and if the value of RCX bit 1 is set, all XMM state, is passed to the TD guest as shown above.

5.5.26.3.2. Enumeration

- Control of RBP usage as an input/output parameter by the TD's CONFIG_FLAG.NO_RBP_MOD is enumerated by TDX_FEATURES0.NO_RBP_MOD (bit 18), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, then RBP can be used by TDG.VP.VMCALL to pass information between the guest TD and the host VMM, although highly discouraged since it contradicts normal calling conventions ABI.

5.5.26.3.3. L2 VM Details

- TDG.VP.VMCALL may be invoked by an L2 VM, if enabled by the L1 VMM for the current VCPU (by setting TDVPS.L2_CTL.ENABLE_TDVMCALL). If not enabled, then TDG.VP.VMCALL results in an L2→L1 exit.

- On subsequent TD resumption, the host VMM may request resumption into L1 by setting TDH.VP.ENTER's RESUME_L1 flag. In this case, L1 is resumed (i.e., the TDG.VP.ENTER it has invoked is terminated) with a TDX_L2_EXIT_HOST_ROUTED_TDVMCALL status. The L2 VCPU state reflects the successful completion of TDG.VP.VMCALL.

5.5.26.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.454: TDG.VP.VMCALL Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	RW	Opaque	N/A	Shared(i)

5.5.26.5. Completion Status Codes**Table 5.455: TDG.VP.VMCALL Completion Status Codes (Returned in RAX) Definition**

Completion Status Code	Description
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VP.VMCALL is successful. TD exit was done, resulting in a completion of SEAMCALL(TDH.VP.ENTER) on the host VMM side. Later, the host VMM executed SEAMCALL(TDH.VP.ENTER) again, and execution returned to the guest TD VCPU (in TDX non-root mode) completing TDG.VP.VMCALL.

5

5.5.27. TDG.VP.WR Leaf

Write a VCPU-scope metadata field (control structure field) of a TD.

5.5.27.1. Input Operands**Table 5.456: TDG.VP.WR Input Operands**

Operand	Description		
RAX	TDCALL instruction leaf number and version, see 5.5.1		
	Bits	Field	Description
	15:0	Leaf Number	Selects the TDCALL interface function: 10
	23:16	Version Number	Selects the TDCALL interface function version Must be 0
	63:24	Reserved	Must be 0
RCX	Reserved, must be 0		
RDX	Field identifier – see 3.10 The LAST_ELEMENT_IN_FIELD and LAST_FIELD_IN_SEQUENCE components of the field identifier must be 0. WRITE_MASK_VALID, INC_SIZE, CONTEXT_CODE and FIELD_SIZE components of the field identifier are ignored.		
R8	Data to write to the field		
R9	A 64b write mask to indicate which bits of the value in R8 are to be written to the field		

5.5.27.2. Output Operands**Table 5.457: TDG.VP.WR Output Operands Definition**

Operand	Description
RAX	TDCALL instruction return code – see 5.5.1
R8	Previous contents of the field In case of an error, as indicated by RAX, R8 returns 0.
Other	Unmodified

5.5.27.3. Leaf Function Description

Intel SDM, Vol.3, Appendix A VMX Capabilities Reporting Facility

Note: The description below is provided at a high level. Actual details, order of checks, returned status codes, etc. may vary.

5.5.27.3.1. Overview

TDG.VP.WR writes a VCPU-scope metadata field (control structure field) of a TD. The value (R8) is written as specified by the write mask (R9). Writing is subject to the field's internal write mask (per the TD's ATTRIBUTES.DEBUG bit).

Table 5.458: Metadata Field Write Rules

Write Mask Bit in R9	Internal Write Mask Bit	Value Bit in R8
0	N/A	Silently ignored
1	0	Must be the same as the current field's bit
1	1	Written to the current field's bit

Writing of specific fields may also be subject to additional rules, e.g.:

- Writing of L2 VMCS fields is subject to the VMX capabilities reported by the applicable virtual values of IA32_VMX_* MSRs, as described in [Intel SDM, Vol.3, Appendix A].
- Guest CR0 and CR4 values are subject to the CR0/4 guest host mask and read shadow settings. For details, see the [TD Partitioning Spec].

5.5.27.3.2. Enumeration

Availability of TDG.VP.WR enumerated by TDX_FEATURES0.ENHANCED_METADATA (bit 3), readable by TDH.SYS.RD* (see 3.3.3.1). If not supported, calling TDG.VP.WR returns a TDX_OPERAND_INVALID(RAX) status.

5.5.27.4. Operands Information

To understand the table and text below, please refer to the [TDX Module Base Spec] chapter discussing general aspects of the Intel TDX Module API.

Table 5.459 TDG.VM.WR Operands Information Definition

Explicit/ Implicit	Reg.	Ref Type	Resource	Resource Type	Access	Access Semantics	Align Check	Concurrency Restrictions
Implicit	N/A	N/A	TDR page	TDR	None	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDCS structure	TDCS	R	Opaque	N/A	Shared(i)
Implicit	N/A	N/A	TDVPS structure	TDVPS	RW	Opaque	N/A	Shared(i)

5.5.27.5. Completion Status Codes

Table 5.460: TDG.VP.WR Completion Status Codes (Returned in RAX) Definition

Completion Status Code	Description
TDX_METADATA_FIELD_ID_INCORRECT	
TDX_METADATA_FIELD_NOT_READABLE	
TDX_METADATA_FIELD_NOT_WRITABLE	
TDX_METADATA_FIELD_VALUE_NOT_VALID	
TDX_METADATA_WR_MASK_NOT_VALID	
TDX_OPERAND_BUSY	Operation encountered a busy operand, indicated by the lower 32 bits of the status. In many cases, this can be resolved by retrying the operation.
TDX_OPERAND_INVALID	
TDX_SUCCESS	TDG.VP.WR is successful.
TDX_TD_VMCS_FIELD_NOT_INITIALIZED	

